


## 52®/53® Series Liquidtight Fittings and Flexible Metallic Conduits

Fittings for liquidtight flexible metal conduit with metric threads of PG form (DIN 40430).

### PG Metric Thread Liquidtight Fittings\*

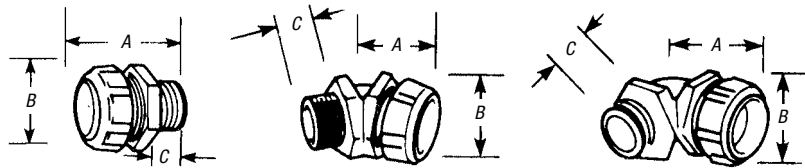

CAT. NO.	FLEXIBLE CONDUIT SIZE	METRIC PG THREAD	A MM	B MM	C MM
<b>Nylon-insulated straight connectors</b>					
7330	1/4"	9	36	21	12
7360	5/16"	9	36	26	12
7361	3/8"	11	40	29	14
7362	3/8"	13.5	40	29	14
7363	1/2"	16	41	35	14
7364	3/4"	21	43	42	14
7365	1"	29	56	47	19
7366	1 1/4"	36	67	58	21
7367	1 1/2"	42	72	69	21
7368	2"	48	81	83	21

\*All items shown on this page are suitable for use in hazardous location where general-purpose equipment is specifically permitted by the NEC®, Class I Div. 2, Class II, Div. 1 & 2; Class III, Div. 1 & 2.


†UL Listed as grounding means under NEC 351-7.

UL Listed liquidtight. CSA Certified watertight.

UL File No. E-23018 CSA File No. 2884

Aluminum mechanical adapter with internal threads to mate with NPT threaded fittings and MS type connectors.

### NPT/MS Connector Adapters

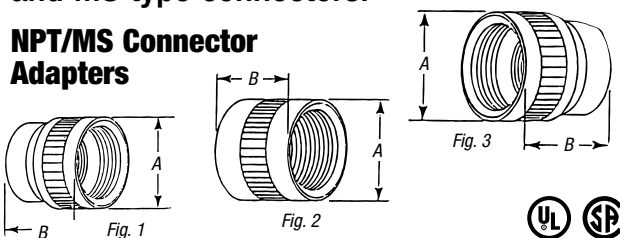


CAT. NO.	N.P.T. THREAD	AN-MS CONNECTOR SHELL SIZE	THREAD SIZE	STD. PKG.	DIMENSIONS (IN.)		
					A	FIG.	B
MSA05014	1/2"	14, 14S	3/4"-20 UNEF-2B	10	1.000	1	1.175
MSA05016	1/2"	16, 16S	7/8"-20 UNEF-2B	10	1.000	2	1.175
MSA05018	1/2"	18	1"-20 UNEF-2B	10	1.125	3	1.175
MSA07516	3/4"	16, 16S	7/8"-20 UNEF-2B	10	1.250	1	1.356
MSA07518	3/4"	18	1"-20 UNEF-2B	10	1.250	1	1.300
MSA07520	3/4"	20, 22	1 1/16"-18 UNEF-2B	10	1.375	3	1.300
MSA10020	1"	20, 22	1 1/16"-18 UNEF-2B	10	1.500	1	1.431
MSA10024	1"	24, 28	1 1/16"-18 UNEF-2B	10	1.625	3	1.313
MSA10032	1"	32	1 3/4"-18 UNS-2B	10	2.000	3	1.576
MSA10036	1"	36	2"-18 UNS-2B	10	2.250	3	1.738

All items shown on this page are suitable for use in hazardous location where general-purpose equipment is specifically permitted by the NEC; Class I Div. 2; Class II, Div. 1 & 2; Class III, Div. 1 & 2.

CAT. NO.	FLEXIBLE CONDUIT SIZE	METRIC PG THREAD	A MM	B MM	C MM
<b>Nylon-insulated 45° angle connectors</b>					
7341	3/8"	11	27	29	14
7342	3/8"	13.5	27	29	14
7343	1/2"	16	30	35	14
7344-TB	3/4"	21	34	42	14
7345	1"	29	44	47	19
7346	1 1/4"	36	51	58	19
7347	1 1/2"	42	60	69	21
7348-TB	2"	48	73	76	24
<b>Nylon-insulated 90° angle connectors</b>					
7351	3/8"	11	37	29	14
7352	3/8"	13.5	37	29	14
7353	1/2"	16	40	35	14
7354	3/4"	21	44	42	14
7355	1"	29	56	47	21
7356	1 1/4"	36	70	58	21
7357	1 1/2"	42	75	69	21
7358	2"	48	87	83	24

Steel T&B® Liquidtight flexible metal and non-metallic fittings with internal threads to accept AN-MS connector shells.

### Liquidtight Flexible Metal/MS Connectors

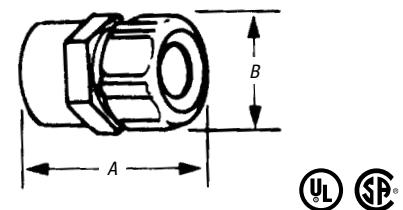

CAT. NO.	TRADE SIZE	AN-MS CONN. SHELL SIZE	THREAD SIZE	DIMENSIONS (IN.)	
				A	B
LTA03810	3/8"	10SL, 12, 12S	5/8"-24 UNEF-2B	1 1/32	1
LTA05014	1/2"	14, 14S	3/4"-20 UNEF-2B	1 1/16	1 1/4
LTA05016	1/2"	16, 16S	7/8"-20 UNEF-2B	1 1/16	1 1/4
LTA05018	1/2"	18	1"-20 UNEF-2B	1 1/16	1 1/4
LTA07520	3/4"	20, 22	1 1/16"-18 UNEF-2B	1 1/16	1 1/2
LTA10020	1"	20, 22	1 1/16"-18 UNEF-2B	1 3/4	1 3/32
LTA10024	1"	25, 28	1 1/16"-18 UNEF-2B	1 3/4	1 3/32

UL File No. E 23018 CSA File No. 2884