

Ordering

In the FD through RD frames, you may order molded case circuit breakers three basic ways:

- As separately ordered frames, trip units and lugs
- As frame, trip unit and lugs ordered as one catalog number and shipped unassembled or assembled
- As Frame and Trip Unit shipped assembled and with the trip unit made non-removable, in compliance with UL 489 requirements that to be reverse fed the circuit breaker must not have an interchangeable trip unit.

These two options are described in the following:

Components Ordered Separately

To get the components for a 3-pole, 400 Amp standard interrupting circuit breaker, you would order the frame (JD63F400), the trip unit (JD63T400) and six lugs (TA2J6500). This option is normally useful only if you stock and use large volumes of product and wish to reduce your inventory cost. You may stock, for example, a smaller number of frames (JD63F400) and a variety of trip units (JD63T300, JD63T350, etc.) and assemble breakers as you need them.


Frame, Trip Unit and Lugs Ordered Together

If you order the catalog number JD63B400, you will receive a frame, a trip unit and 6 lugs in separate packages. By suffixing this number with "L" (e.g. JD63B400L), you will receive frame, trip unit and lugs assembled in one container. Pursuant to UL 489, a product ordered thus will have the markings "LINE" and "LOAD", and may not be "reverse fed" (with power flowing from the "OFF" end of the breaker toward the "ON" end).

Non-Interchangeable Trip Breakers

If you place an "X" after the frame size designator (e.g. JXD63B400), you will receive a frame and trip unit assembled, with the trip unit made non-removable. If you suffix an "L" to this catalog number (e.g. JXD63B400L), you will receive the breaker, non-removable trip unit and lugs assembled. Unless you anticipate a specific need to change the breaker's ampere rating in the future, this is the preferred ordering method, as the products are assembled to Siemens' specifications in our factories. These breakers are suitable for use reverse fed according to UL 489, since the trip unit is not removable.

The smaller frames (QJ, ED and below) do not have removable trip units, and consequently are shipped only as assembled products. To add lugs, see the ordering instructions on each product's catalog page.

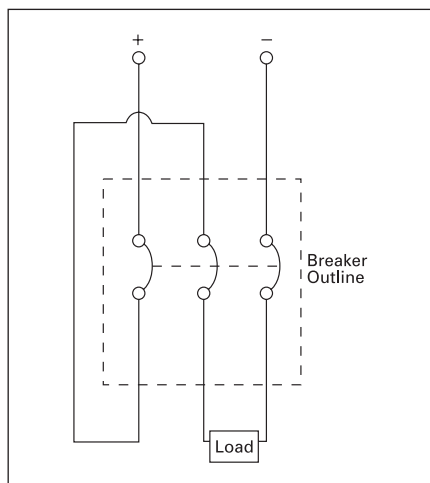


500V DC Wiring Configuration


Connecting Breakers for DC Application

Most Siemens thermal magnetic trip MCCBs are applicable on direct current (dc) systems. Generally, for 250 V dc systems a two pole breaker is used, with one pole on each leg of the supply circuit. For three pole breakers applied on 500 V undergrounded DC systems, it is important to connect the power supply "zig-zag" through the breaker as shown in the figure below. This assures that the Voltage between phases on the breaker terminals is uniformly distributed.

See below for an alternative connection diagram. For a list of Sentron breakers with the DC ratings, please refer to pages 7-11 to 7-16.

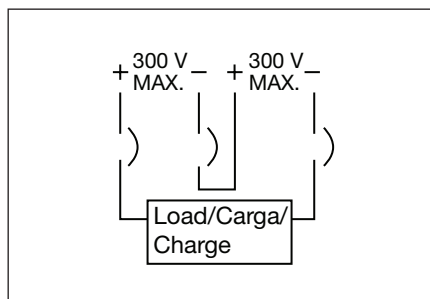

VL Molded Case Circuit Breakers

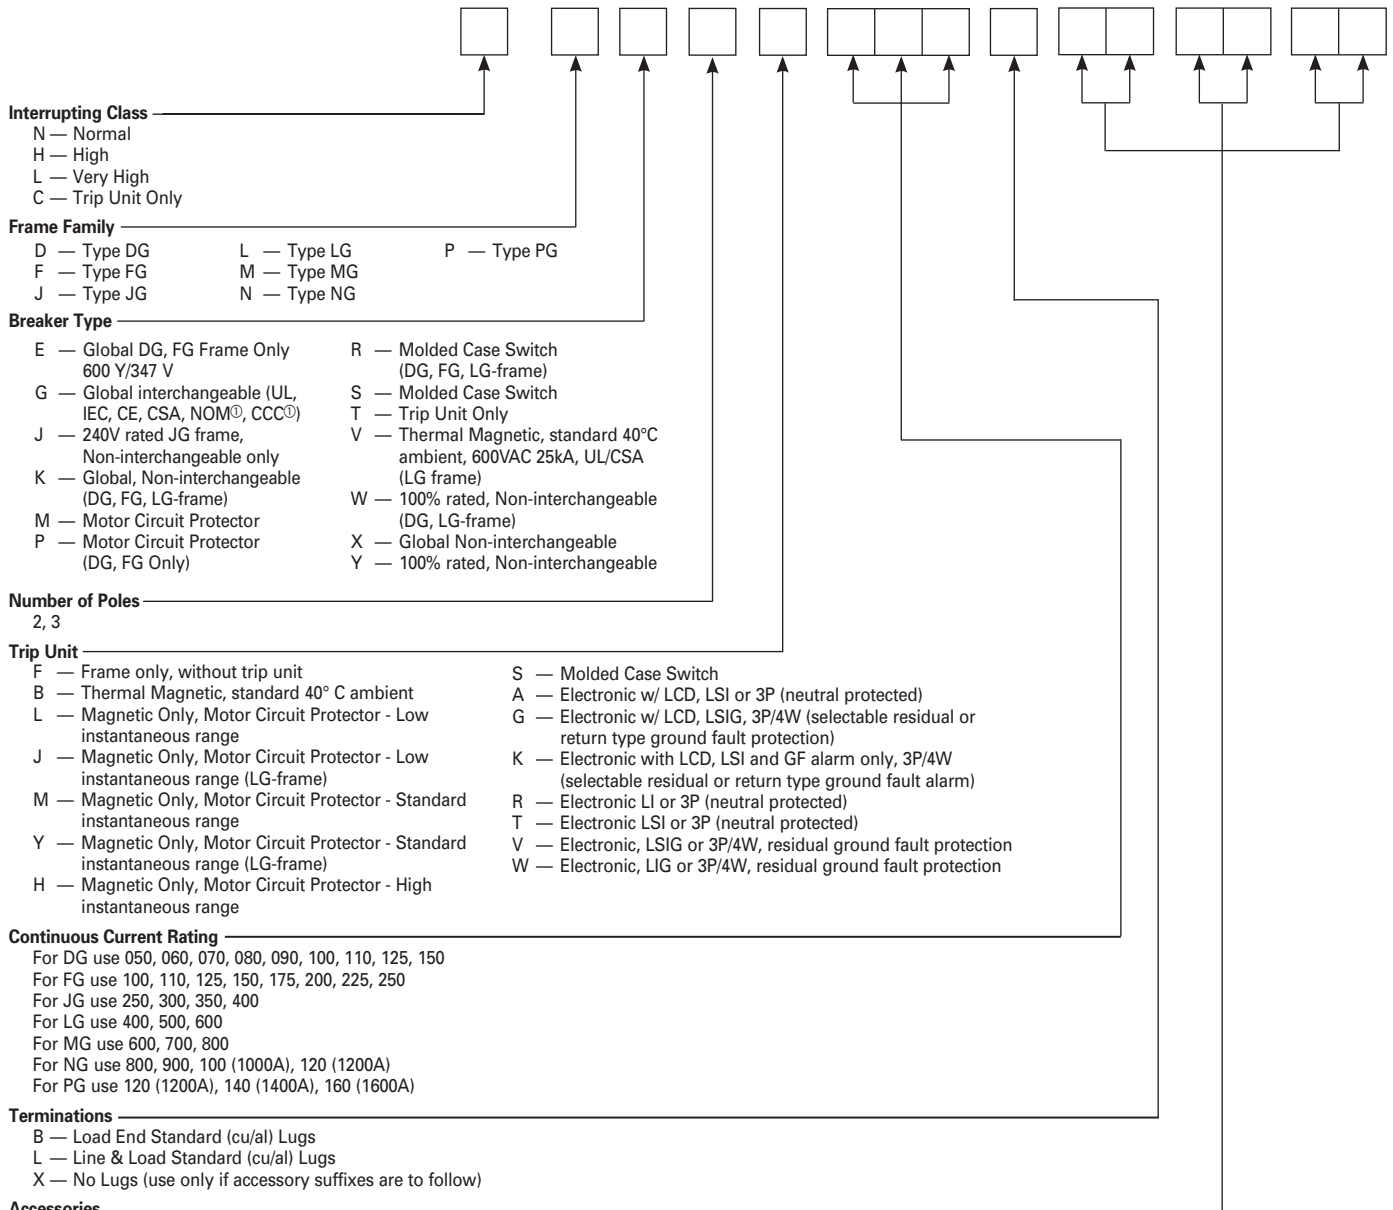

Interrupting Class

- N — Normal
- H — High
- L — Very High
- C — Trip Unit Only

Frame Family

- D — Type DG
- F — Type FG
- J — Type JG
- L — Type LG
- M — Type MG
- N — Type NG
- P — Type PG

Breaker Type

- E — Global DG, FG Frame Only 600 Y/347 V
- G — Global interchangeable (UL, IEC, CE, CSA, NOM[®], CCC[®])
- J — 240V rated JG frame, Non-interchangeable only
- K — Global, Non-interchangeable (DG, FG, LG-frame)
- M — Motor Circuit Protector
- P — Motor Circuit Protector (DG, FG Only)
- R — Molded Case Switch (DG, FG, LG-frame)
- S — Molded Case Switch
- T — Trip Unit Only
- V — Thermal Magnetic, standard 40°C ambient, 600VAC 25kA, UL/CSA (LG frame)
- W — 100% rated, Non-interchangeable (DG, LG-frame)
- X — Global Non-interchangeable
- Y — 100% rated, Non-interchangeable

Number of Poles

- 2, 3

Trip Unit

- F — Frame only, without trip unit
- B — Thermal Magnetic, standard 40° C ambient
- L — Magnetic Only, Motor Circuit Protector - Low instantaneous range
- J — Magnetic Only, Motor Circuit Protector - Low instantaneous range (LG-frame)
- M — Magnetic Only, Motor Circuit Protector - Standard instantaneous range
- Y — Magnetic Only, Motor Circuit Protector - Standard instantaneous range (LG-frame)
- H — Magnetic Only, Motor Circuit Protector - High instantaneous range
- S — Molded Case Switch
- A — Electronic w/ LCD, LSI or 3P (neutral protected)
- G — Electronic w/ LCD, LSIG, 3P/4W (selectable residual or return type ground fault protection)
- K — Electronic with LCD, LSI and GF alarm only, 3P/4W (selectable residual or return type ground fault alarm)
- R — Electronic LI or 3P (neutral protected)
- T — Electronic LSI or 3P (neutral protected)
- V — Electronic, LSIG or 3P/4W, residual ground fault protection
- W — Electronic, LIG or 3P/4W, residual ground fault protection

Continuous Current Rating

- For DG use 050, 060, 070, 080, 090, 100, 110, 125, 150
- For FG use 100, 110, 125, 150, 175, 200, 225, 250
- For JG use 250, 300, 350, 400
- For LG use 400, 500, 600
- For MG use 600, 700, 800
- For NG use 800, 900, 100 (1000A), 120 (1200A)
- For PG use 120 (1200A), 140 (1400A), 160 (1600A)

Terminations

- B — Load End Standard (cu/al) Lugs
- L — Line & Load Standard (cu/al) Lugs
- X — No Lugs (use only if accessory suffixes are to follow)

Accessories

Auxiliary and Alarm Switch Combinations

- | Suffix | Description |
|--------|--|
| A1 | 1 Alarm (includes 1NO & 1NC switch with a 2 Aux./1 Alarm Base, for frames DG to LG) |
| A2 | 2 Aux (1NO & 1NC switch with a 3 Aux. Base, for frames DG to LG) |
| A3 | 2 Aux + 1 Alarm (2NO & 2NC switches with a 2 Aux./1 Alarm Base, for frames DG to LG) |
| A3 | 2 Aux + 2 Alarm (2NO & 2NC switches with a 2 Aux./2 Alarm Base, for frames MG to PG) |
| A4 | 4 Aux (2NO & 2NC switches with a 4 Aux. Base, for frames MG to PG) |

Shunt Trips

- | | |
|------------------|------------------|
| RB — 24 VDC | RM — 48-60 VAC |
| RC — 48-60 VDC | RN — 110-127 VAC |
| RD — 110-127 VDC | RS — 208-277 VAC |
| RE — 250 VDC | RV — 380-600 VAC |

Under Voltage Releases

- | | |
|------------------|------------------|
| UA — 12 VDC | UN — 110-127 VAC |
| UB — 24 VDC | UP — 208 VAC |
| UC — 48 VDC | UR — 220-250 VAC |
| UD — 110-127 VDC | US — 277 VAC |
| UE — 220-250 VDC | UT — 380-415 VAC |
| UG — 60 VDC | UU — 440-480 VAC |
| UK — 24 VAC | |

Note: A1 and A3 include 1NO and 1NC switch for alarm purposes, only one of these switches may be used as there is only one space for an alarm.

LCD = Liquid Crystal Display
 LI = Long Delay & Instantaneous trip functions
 LSI = Long Delay, Short Delay, & Instantaneous trip functions
 LSIG = Long Delay, Short Delay, Instantaneous, & Ground Fault trip functions
 GF = Ground Fault
 3P = 3-pole
 4W = 4-wire

© Select Frames

Molded Case Circuit Breakers

General

Protection of Motor Circuits

Molded case circuit breakers are used in motor circuits as a disconnecting means and for short-circuit protection. They should be used in conjunction with motor-running, over-current-protection devices, and should permit the motor to start without nuisance tripping from motor-inrush current. The circuit breaker should have a continuous-current rating of not less than 115% of the motor full-load current.

The recommended motor circuit protectors (Siemens ETI instantaneous only circuit breakers) listed have

continuous-current ratings of at least 115% of motor full-load currents. The trip-setting positions are approximately 11 times motor full-load currents. The suggested trip settings may have to be adjusted upward to no higher than 1300% of full-load current for non-design E type motors, and no greater than 1700% of full load current for design E motors, to allow for motor start-up due to inrush currents.

Breaker Mounted Immediately Ahead of Motor Starter

Siemens ETI motor circuit protectors are recommended for use in combination motor starters to provide selective short-circuit protection for the motor

branch circuit. The adjustable instantaneous-trip feature of the Siemens ETI motor circuit protector provides for a trip setting slightly above the peak motor-inrush current. With this setting, no delay is introduced in opening the circuit when a fault occurs. This circuit breaker has no time-delay trip element. Therefore it must be used in conjunction with, and immediately ahead of, the motor-running overcurrent protective device.

Important: The information below does not apply to all motor applications: it is recommended that the user refer to the National Electrical Code (NEC) for specific needs.

Table 1 (When Breaker is Mounted Immediately Ahead of Motor Starter)

3-Phase Induction Type Motors (Siemens ETI motor circuit protectors for branch circuit use with alternating-current combination, full voltage motor starters).

Motor Full Load Amperes	Catalog Number	ETI Trip Setting		Motor Full Load Amperes	Catalog Number	ETI Trip Setting		Motor Full Load Amperes	Catalog Number	ETI Trip Setting	
		Adjustment	Amperes			Adjustment	Amperes			Adjustment	Amperes
0.69 – 0.91	HEM3M003L	A (min)	9	1.23 – 1.99	ED63A005 CED63A005	Low	16	95.00 – 110.00	JXD63L400 CJD63L400	Low	1250
1.1 – 1.3		B	15	2.00 – 2.75		2	26	110.00 – 124.00		2	1430
1.6 – 1.7		C	21	2.76 – 3.52		3	36	138.00 – 151.00		4	1790
2.0 – 2.2		D	27	3.53 – 4.14		4	46	165.00 – 178.00		6	2140
2.3 – 2.5		E	30	4.15 – 4.90		High	54	178.00 – 192.00		7	2320
2.6 – 2.8		F (max)	33					192.00 – 227.00		High	2500
1.5 – 2.0	HEM3M007L	A (min)	21	2.30 – 3.83	ED63A010 CED63A010	Low	30	154.00 – 176.00	JXD63H400 CJD63H400	Low	2000
2.6 – 3.1		B	35	3.84 – 5.37		2	50	176.00 – 198.00		2	2290
3.7 – 3.9		C	49	5.38 – 6.52		3	70	220.00 – 242.00		4	2860
4.8 – 5.2		D	63	6.53 – 7.68		4	85	264.00 – 285.00		6	3430
5.3 – 5.7		E	70	7.69 – 9.10		High	100	285.00 – 308.00		7	3710
5.8 – 6.1		F (max)	77					308.00 – 326.00		High	4000
3.4 – 4.5	HEM3M015L	A (min)	45	4.23 – 6.91	ED63A025 CED63A025	Low	55	155.00 – 176.00	LXD63L600 CLD63L600	Low	2000
5.7 – 6.8		B	75	6.92 – 9.61		2	90	176.00 – 198.00		2	2290
8.0 – 9.1		C	100	9.62 – 11.91		3	125	220.00 – 242.00		4	2860
10.4 – 11.4		D	135	11.92 – 13.83		4	155	264.00 – 285.00		6	3430
11.5 – 12.6		E	150	13.84 – 16.40		High	180	285.00 – 308.00		7	3710
12.7 – 13.0		F (max)	165					308.00 – 326.00		High	4000
3.9 – 9.1	HEM3M030L	A (min)	90	6.15 – 10.37	ED63A030 CED63A030	Low	80	231.00 – 264.00	LXD63H600 CLD63H600	Low	3000
11.5 – 13.7		B	150	10.38 – 14.22		2	135	264.00 – 292.00		2	3430
16.1 – 18.3		C	210	14.23 – 18.06		3	185	330.00 – 362.00		4	4290
20.7 – 22.9		D	270	18.07 – 20.75		4	235	395.00 – 428.00		6	5140
23.0 – 25.2		E	300	20.76 – 24.50		High	270	428.99 – 462.00		7	5570
25.3 – 26.1		F (max)	330					462.00 – 490.00		High	6000
11.5 – 15.2	HEM3M050L	A (min)	150	8.84 – 14.22	ED63A040 CED63A040	Low	115	215.00 – 238.00	LMXD63L800	Low	2800
19.2 – 22.9		B	250	14.23 – 19.60		2	185	238.00 – 261.00		2	3100
26.9 – 30.6		C	350	19.61 – 24.99		3	255	261.00 – 284.00		3	3400
34.6 – 38.3		D	450	25.00 – 28.83		4	325	308.00 – 369.00		5	4000
38.4 – 42.1		E	500	28.84 – 34.00		High	375	369.00 – 423.00		6	4800
42.2 – 43.5		F (max)	550					423.00 – 462.00		7	5500
16.1 – 30.6	HEM3M070L	A (min)	210	13.84 – 23.06	ED63A050 CED63A050	Low	180	246.00 – 269.00	LMXD63A800	Low	3200
26.9 – 32.2		B	350	23.07 – 31.52		2	300	269.00 – 284.00		2	3500
37.6 – 42.9		C	490	31.53 – 39.99		3	410	284.00 – 323.00		3	3700
48.4 – 53.7		D	630	40.00 – 46.14		4	520	362.00 – 492.00		5	4700
53.8 – 59.1		E	700	46.15 – 54.50		High	600	492.00 – 562.00		6	6400
59.2 – 60.9		F (max)	770					562.00 – 616.00		7	7300
23.0 – 30.9	HEM3M100L	A (min)	300	24.23 – 41.52	ED63A100 CED63A100	Low	315	284.00 – 323.00	MXD63L800 CMD63L800	Low	3000
38.4 – 46.0		B	500	41.53 – 56.91		2	540	292.00 – 292.00		2	3430
53.8 – 61.4		C	700	56.92 – 68.45		3	740	362.00 – 395.00		3	3800
69.2 – 76.8		D	900	68.46 – 76.91		4	890	362.00 – 395.00		5	4710
76.9 – 84.5		E	1000	76.92 – 90.90		High	1000	428.00 – 462.00		7	5570
84.6 – 87.0		F (max)	1100					462.00 – 490.00		High	6000
.20 – .33	ED63A001 CED63A001	Low	2.6	30.76 – 35.37	FXD63L150 CFD63L150	Low	400	308.00 – 352.00	MXD63A800 CMD63A800	Low	4000
.34 – .45		2	4.5	35.38 – 39.99		2	460	352.00 – 442.00		2	4570
.46 – .56		3	6	44.51 – 49.23		4	580	442.00 – 447.00		3	5740
.57 – .68		4	7.5	53.84 – 58.45		6	700	483.00 – 527.00		5	6280
.69 – .81		High	9	58.46 – 63.06		7	760	571.00 – 616.00		7	7240
.53 – .83	ED63A002 CED63A002	Low	7	61.53 – 69.22	FXD63A150 CFD63A150	Low	800	616.00 – 660.00	MXD63H800 CMD63H800	Low	5000
.84 – 1.14		2	11	69.23 – 76.91		2	900	385.00 – 440.00		3	6430
1.15 – 1.45		3	15	84.61 – 92.29		4	1100	495.00 – 550.00		5	7860
1.46 – 1.68		4	19	100.00 – 108.00		6	1300	605.00 – 660.00		6	8575
1.69 – 2.00		High	22	108.00 – 115.00		7	1400	660.00 – 695.00		High	8000
.76 – 1.29	ED63A003 CED63A003	Low	10	115.00 – 136.00	FXD63A250 CFD63A250	Low	1100			Low	5000
1.30 – 1.75		2	17	85.00 – 100.00		2	1300			3	6430
1.76 – 2.29		3	23	100.00 – 115.00		4	1700			5	7860
2.30 – 2.68		4	30	131.00 – 146.00		6	2100			6	8575
2.69 – 3.18		High	35	162.00 – 177.00		7	2300			High	
				177.00 – 192.00	High	2500					
				192.00 – 227.00							

Note: Lowest instantaneous settings have a -20%/+30% tolerance and all other settings have a -20%/+20% tolerance.

MOLDED CASE CIRCUIT BREAKERS