


Choose the appropriate configuration from the Selector below.

### Hubbell Logic Configurator



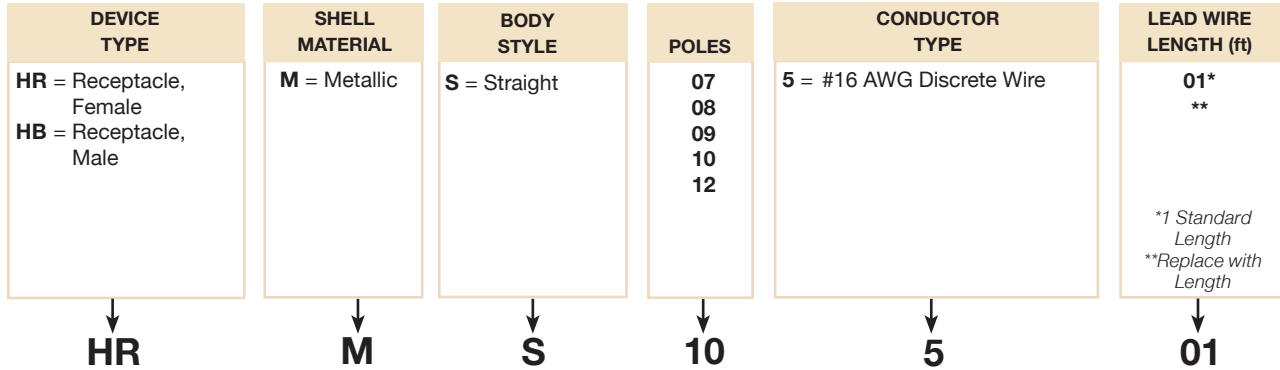


For example, catalog number **HRMS10501** is derived as follows:



Note: Availability of specific items may vary. Consult factory for delivery. Consult the factory for additional wire lengths or wire types.


### 7 - 12 Pole Receptacles

#16 AWG Discrete Wire

Poles	Male Face Shown Female - mirror image	Female Receptacles	Male Receptacles
7		<b>HRMS07501</b>	<b>HBMS07501</b>
8		<b>HRMS08501</b>	<b>HBMS08501</b>
9		<b>HRMS09501</b>	<b>HBMS09501</b>
10		<b>HRMS10501</b>	<b>HBMS10501</b>
12		<b>HRMS12501</b>	<b>HBMS12501</b>



### Straight Receptacles

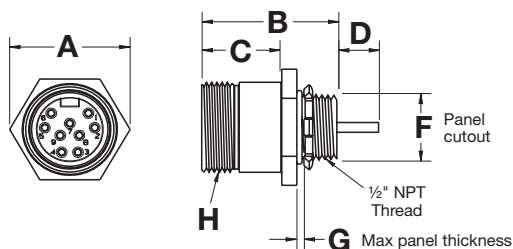

#### 7 - 8 Pole

	MALE	FEMALE
<b>A</b>	1.29" (32.8)	1.29" (32.8)
<b>B</b>	1.44" (36.6)	1.44" (36.6)
<b>C</b>	0.80" (20.3)	0.80" (20.3)
<b>D</b>	12.0" (304.8)	12.0" (304.8)
<b>F</b>	0.83" (21.1)	0.83" (21.1)
<b>G</b>	0.25" (6.4)	0.25" (6.4)
<b>H</b>	1 - 16 UN Thread	

#### 9 - 12 Pole

	MALE	FEMALE
<b>A</b>	1.44" (36.6)	1.44" (36.6)
<b>B</b>	1.62" (41.2)	1.62" (41.2)
<b>C</b>	0.96" (24.4)	0.96" (24.4)
<b>D</b>	12.0" (304.8)	12.0" (304.8)
<b>F</b>	0.83" (21.1)	0.83" (21.1)
<b>G</b>	0.25" (6.4)	0.25" (6.4)
<b>H</b>	1 1/8 - 16 UN Thread	

### Conductor Color Code




#### #16 AWG Receptacles

Contact Number	2 Pole	3 Pole	4 Pole	5 Pole	6 Pole	7 Pole	8 Pole	9 Pole	10 Pole	12 Pole
1	White	Green	Black	White	White	White/Black	Orange	Orange	Orange	Orange
2	Black	Black	White	Red	Red	Black	Blue	Blue	Blue	Blue
3		White	Red	Green	Green	White	White/Black	Red/Black	White/Black	White/Black
4			Green	Orange	Orange	Red	Black	Green/Black	Red/Black	Red/Black
5				Black	Black	Orange	White	White	Green/Black	Green/Black
6					Blue	Blue	Red	Red	Orange/Black	Orange/Black
7						Green	Green	Green	Red	Blue/Black
8							Red/Black	White/Black	Green	Black/White
9								Black	Black	Green
10									White	Red
11										White
12										Black

### Accessories

Closure caps protect plugs and receptacles when not in use. Adapter rings allow the mating of male and female plugs for in-line applications.

Description	Closure Cap			Closure Cap			Adapter Ring		
	Shell Size	Thread Size	Catalog Number	Shell Size	Thread Size	Catalog Number	Shell Size	Thread Size	Catalog Number
7 to 8 Pole	II	1 - 16 UN	<b>HPCAP2</b>	II	1 - 16 UN	<b>HRCAP2</b>	II	1 - 16 UN	<b>HMQR2</b>
9 to 12 Pole	III	1 1/8 - 16UN	<b>HPCAP3</b>	III	1 1/8 - 16UN	<b>HRCAP3</b>	III	1 1/8 - 16UN	<b>HMQR3</b>
Cap Size	II- 1.12" (28.5), III- 1.25" (31.8)			II- 1.13" (28.6), III- 1.25" (31.8)			II- 1.00" (25.4), III- 1.13" (28.6)		



Dimensions in Inches (mm)