

Choose the appropriate configuration from the Selector below.

### Hubbell Logic Configurator

For example, catalog number **MRMS22325** is derived as follows:






DEVICE TYPE	COUPLING NUT MATERIAL	BODY STYLE	KEY STYLE	POLES	CONDUCTOR TYPE	REAR THREAD STYLE
<b>MR</b> = Receptacle, Female <b>MB</b> = Receptacle, Male <b>MF</b> = Receptacle, Female Inverse	<b>M</b> = Metallic	<b>S</b> = Straight	<b>2</b> = Dual	2 3 4 5 6	<b>3</b> = #22 AWG PVC Discrete Wire <b>4</b> = #18 AWG PVC Discrete Wire* *2 - 5 Pole Only	<b>25</b> = ¼" NPT* <b>50</b> = ½" NPT *MF Style Only
<b>MR</b>	<b>M</b>	<b>S</b>	<b>2</b>	<b>2</b>	<b>3</b>	<b>25</b>

Note: Availability of specific items may vary. Consult factory for delivery. Consult the factory for additional cable lengths or cable types.

Male Receptacle Rear Thread Style		Female Inverse Receptacles Rear Thread Style
<b>M14 X 1</b>	<b>½" NPT</b>	<b>¼" NPT</b>


### 2 - 6 Pole Dual Key Receptacles

Catalog numbers using #22 AWG PVC cable are listed below. For #18 AWG PVC discrete wire, change the conductor type per the Hubbell Logic chart above.

Poles	Male Face Shown Female - mirror image	Female Receptacle Rear Thread Style		Male Receptacle Rear Thread Style		Female Inverse Receptacles
		¼" NPT	½" NPT	¼" NPT	½" NPT	¼" NPT
2		<b>MRMS22325</b>	<b>MRMS22350</b>	<b>MBMS22325</b>	<b>MBMS22350</b>	<b>MFMS22325</b>
3		<b>MRMS23325</b>	<b>MRMS23350</b>	<b>MBMS23325</b>	<b>MBMS23350</b>	<b>MFMS23325</b>
4		<b>MRMS24325</b>	<b>MRMS24350</b>	<b>MBMS24325</b>	<b>MBMS24350</b>	<b>MFMS24325</b>
5		<b>MRMS25325</b>	<b>MRMS25350</b>	<b>MBMS25325</b>	<b>MBMS25350</b>	<b>MFMS25325</b>
6		<b>MRMS26325</b>	<b>MRMS26350</b>	<b>MBMS26325</b>	<b>MBMS26350</b>	<b>MFMS26325</b>




### 1/4" NPT Rear Thread Receptacle

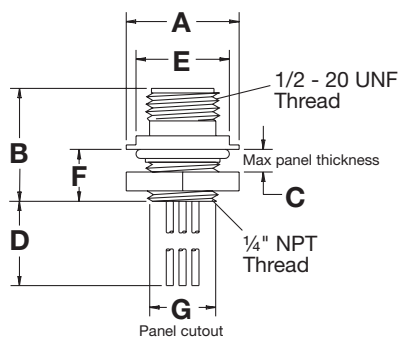


	MALE	FEMALE
<b>A</b>	0.75" (19.1)	0.75" (19.1)
<b>B</b>	0.75" (19.1)	0.86" (21.8)
<b>C</b>	0.10" (2.5)	0.10" (2.5)
<b>D</b>	12.0" (304.8)	12.0" (304.8)
<b>E</b>	0.62" (15.8)	0.62" (15.8)
<b>F</b>	0.35" (8.9)	0.38" (9.7)
<b>G</b>	0.56" (14.2)	0.56" (14.2)

### Female Inverse Receptacle 1/4" NPT Rear Thread

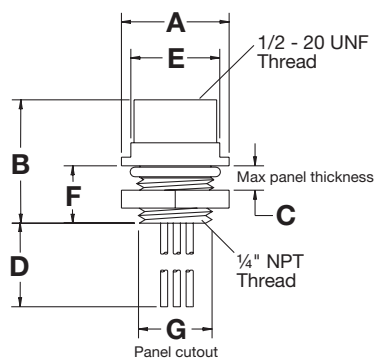

<b>A</b>	0.75" (19.1)
<b>B</b>	0.86" (21.8)
<b>C</b>	0.15" (3.8)
<b>D</b>	12.0" (304.8)
<b>E</b>	0.62" (15.8)
<b>F</b>	0.40" (10.2)
<b>G</b>	0.56" (14.2)

### 1/2" NPT Rear Thread Receptacle

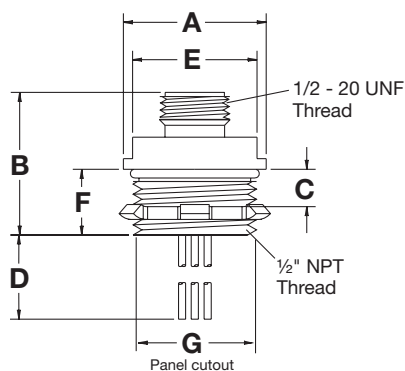

	MALE	FEMALE
<b>A</b>	1.00" (25.4)	1.00" (25.4)
<b>B</b>	1.00" (25.4)	1.00" (25.4)
<b>C</b>	0.24" (6.10)	0.24" (6.10)
<b>D</b>	12.0" (304.8)	12.0" (304.8)
<b>E</b>	0.87" (22.1)	0.87" (22.1)
<b>F</b>	0.46" (11.7)	0.46" (11.7)
<b>G</b>	0.85" (21.6)	0.85" (21.6)

### Conductor Color Code - Dual Key

Contact Number	2 Pole	3 Pole	4 Pole	5 Pole	6 Pole
1	Brown	Green	Red/Black	Red/White	Red/White
2	Blue	Red/Black	Red/White	Red	Red
3		Red/White	Red	Green	Green
4			Green	Red/Yellow	Red/Yellow
5				Red/Black	Red/Black
6					Red/Blue

### Accessories

#### Dust Caps

Closure caps protect plugs and receptacles when not in use. Key style is for dual with thread of 1/2"-20 UNF.

Catalog Number	
<b>MRCM2</b>	
<b>MPCM2</b>	

Dimensions in Inches (mm)