



Cable Positioning Duct  
**MINITRAK® Applications**

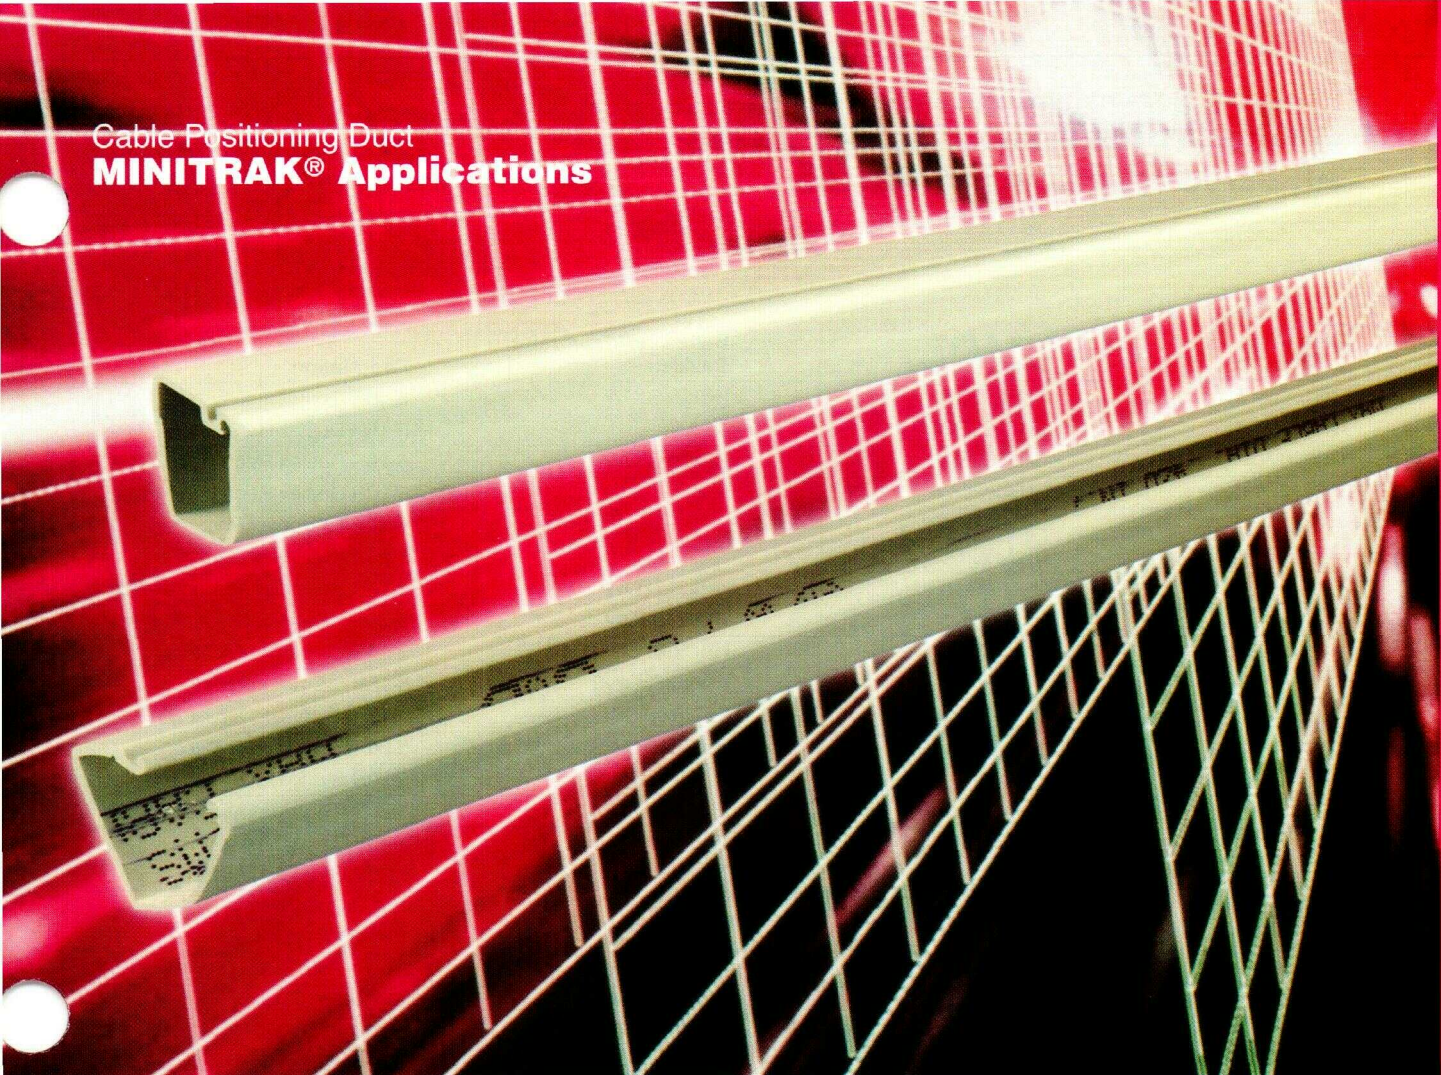


**MiniTrak®** is a cable positioning duct designed to straighten, route and conceal cables. Available in one size, MiniTrak will hold single or multiple cables up to .42 inch (10.7) in diameter. Supplied with pressure sensitive adhesive, installation is easy and quick. It will mount on a variety of surfaces, including plaster, wood, masonry, tile and metal.

MiniTrak is UL Recognized for use with portable cords or low voltage wiring.

Features	Benefits
"Office white" color.	Blends attractively with decor and matches other PolyTrak® products.
Adhesive mounting.	Installs easily.
Low profile.	Manage cords neatly.

MiniTrak	Catalog Number	Cable Dia. Range	Dimensions in inches (mm)		
			A	x B	Length
	<b>MTC420</b>	420" (10.7)	76" W (19.2)	x 54" D (13.7)	5 ft (1.52m)

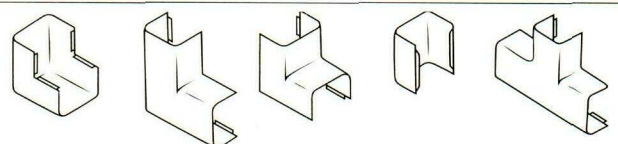

Catalog Numbers	MTC420EEW	MTC420FEW	MTC420IEW	MTC420SCW	MTC420TW
Description	External elbow.	Flat elbow.	Internal elbow.	Splice cover.	Tee cover.

Specifications	
Material	U.V. Stabilized PVC
Flammability	UL 94V-0.
Recognition and Certification	UL Recognized, CSA Certified (duct only).



# Miniature Nylon Cord Connectors

## HUBBELL JUNIORS®



Gray Cord Connector




Black Cord Connector




Gray Cord Connector with Spiral



Black Cord Connector with Spiral

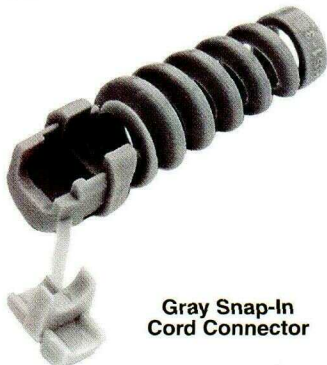

Gray Snap-In  
Cord Connector

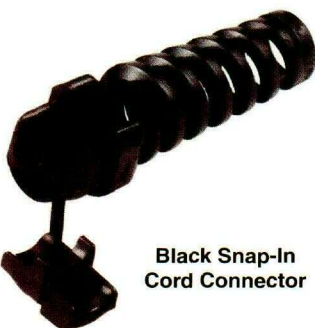

Black Snap-In  
Cord Connector



### Miniature Nylon Cord Connector

N.P.T. Hub Size	Cord Dia. Range		Gray	Black
	Inches	(mm)		
1/4"	.08"-.14"	(1.9-3.4)	HJ1001GPK25	HJ1001BPK25
	.14"-.20"	(3.4-5.1)	HJ1002GPK25	HJ1002BPK25
	.20"-.27"	(5.1-6.7)	HJ1003GPK25	HJ1003BPK25
3/8"	.15"-.21"	(3.7-5.3)	HJ1004GPK25	HJ1004BPK25
	.21"-.28"	(5.3-7.0)	HJ1005GPK25	HJ1005BPK25
	.28"-.34"	(7.0-8.6)	HJ1006GPK25	HJ1006BPK25
1/2"	.06"-.13"	(1.6-3.2)	HJ1055GPK25	HJ1055BPK25
	.13"-.19"	(3.2-4.7)	HJ1056GPK25	HJ1056BPK25
	.19"-.25"	(4.7-6.3)	HJ1057GPK25	HJ1057BPK25
	.25"-.31"	(6.3-7.9)	HJ1058GPK25	HJ1058BPK25
	.31"-.38"	(7.9-9.5)	HJ1059GPK25	HJ1059BPK25
	.38"-.44"	(9.5-11.1)	HJ1060GPK25	HJ1060BPK25

Notes: Catalog numbers above with "PK25" suffix, i.e. HJ1001GPK25, are bulk packed 25 per carton.

See pages T-97 and T-98 for additional technical data and dimensional drawings.



### Miniature Nylon Cord Connector with Spiral

N.P.T. Hub Size	Cord Dia. Range		Gray	Black
	Inches	(mm)		
1/4"	.08"-.14"	(1.9-3.4)	HJ1010GPK25	HJ1010BPK25
	.14"-.20"	(3.4-5.1)	HJ1011GPK25	HJ1011BPK25
	.20"-.27"	(5.1-6.7)	HJ1012GPK25	HJ1012BPK25
3/8"	.15"-.21"	(3.7-5.3)	HJ1013GPK25	HJ1013BPK25
	.21"-.28"	(5.3-7.0)	HJ1014GPK25	HJ1014BPK25
	.28"-.34"	(7.0-8.6)	HJ1015GPK25	HJ1015BPK25
1/2"	.13"-.19"	(3.2-4.7)	HJ1038GPK25	HJ1038BPK25
	.19"-.25"	(4.7-6.3)	HJ1039GPK25	HJ1039BPK25
	.25"-.31"	(6.3-7.9)	HJ1040GPK25	HJ1040BPK25
	.31"-.38"	(7.9-9.5)	HJ1041GPK25	HJ1041BPK25
	.38"-.44"	(9.5-11.1)	HJ1042GPK25	HJ1042BPK25

Notes: Catalog numbers above with "PK25" suffix, i.e. HJ1001GPK25, are bulk packed 25 per carton.

See pages T-97 and T-98 for additional technical data and dimensional drawings.



### Miniature Nylon Snap-In Cord Connector

Cord Diameter Range Inches (mm)	For Chassis Thickness	Gray	Black
.28"-.32" (7.1-8.1)	.10" (2.5) Max	HS1002GPK25	HS1002BPK25
.30"-.36" (7.6-9.1)	.13" (3.2) Max	HS1003GPK25	HS1003BPK25
.32"-.43" (8.1-10.9)	.13" (3.2) Max	HS1004GPK25	HS1004BPK25

Notes: Catalog numbers above with "PK25" suffix, i.e. HJ1001GPK25, are bulk packed 25 per carton.

See pages T-97 and T-98 for additional technical data and dimensional drawings.