

Wall Plates

Security Wall Plates



SWP1



SWP8



SWP82



SWP18



SWP28



SWPBIT

1-Gang, White

Description	Catalog Numbers
Toggle switch.	SWP1
Duplex receptacle.	SWP8
GFCI/Style Line® device.	SWP26
Telephone or TV opening (.64").	SWP12
Blank.	SWP13

2-Gang, White

Description	Catalog Numbers
Two toggle switches.	SWP2
Two duplex receptacles.	SWP82
One switch, one duplex receptacle.	SWP18
Two rectangular openings.	SWP262
One duplex receptacle, one telephone or TV.	SWP812
One duplex receptacle, one blank.	SWP813
Double Blank	SWP23

3-Gang, White


Description	Catalog Number
Two switches, one duplex receptacle.	SWP28

Accessories

Description	Catalog Number
Tamperproof screwdriver for security wall plates.	SWPBIT

Dimensions

	A	B	C	D	E	F	G	H
1-Gang	3.77"	5.52"	.55"	3.37"	5.13"	1.00"	4.63"	2.88"
(mm)	(95.76)	(140.21)	(13.97)	(85.60)	(130.30)	(25.40)	(117.60)	(73.15)
2-Gang	5.52"	5.52"	.55"	5.13"	5.13"	1.00"	4.63"	4.63"
(mm)	(140.21)	(140.21)	(13.97)	(130.30)	(130.30)	(25.40)	(117.60)	(117.60)
3-Gang	7.39"	5.52"	.55"	7.00"	5.13"	1.00"	4.63"	6.50"
(mm)	(187.71)	(140.21)	(13.97)	(177.80)	(130.30)	(25.40)	(117.60)	(165.10)

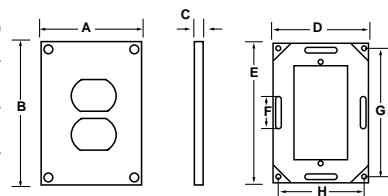

Specifications

Tamper resistant wall plate single gang duplex receptacle shall be of the following construction:

Cover plate: One piece #14 cold rolled zinc plated steel. Plate shall have a five stage baked white polyester powder enamel finish. Gloss: 85%, reflectance: 93%, hardness minimum: 2H and pass 600 hour salt spray test.

Back plate: #10 cold rolled galvanized steel. Plate assembly shall use four (4) #8-32 X 1/2" stainless steel T-20 TORX head screws with center pin reject. Plate must be UL listed to UL 514D and comply with the NEC®.