

Pin and Sleeve Devices/Mechanical Interlocks


IEC Configurations Chart

Singly Rated Configurations


Hubbell Pin and Sleeve products are designed and manufactured to meet the International Standard IEC 60309-1 and IEC 60309-2. This device standard calls out a singly rated, non-interchangeable configuration for every voltage and type of service throughout the world. Pin and sleeve device housings are color coded by voltage rating.

Voltage

The voltage is determined by the location of the female ground contact relative to the housing keyway. Simply by manufacturing the device with a ground contact in a certain "clock" position, the device will be rated for a particular voltage system. The diagram shows the keying position and the color coding that is associated with each voltage.

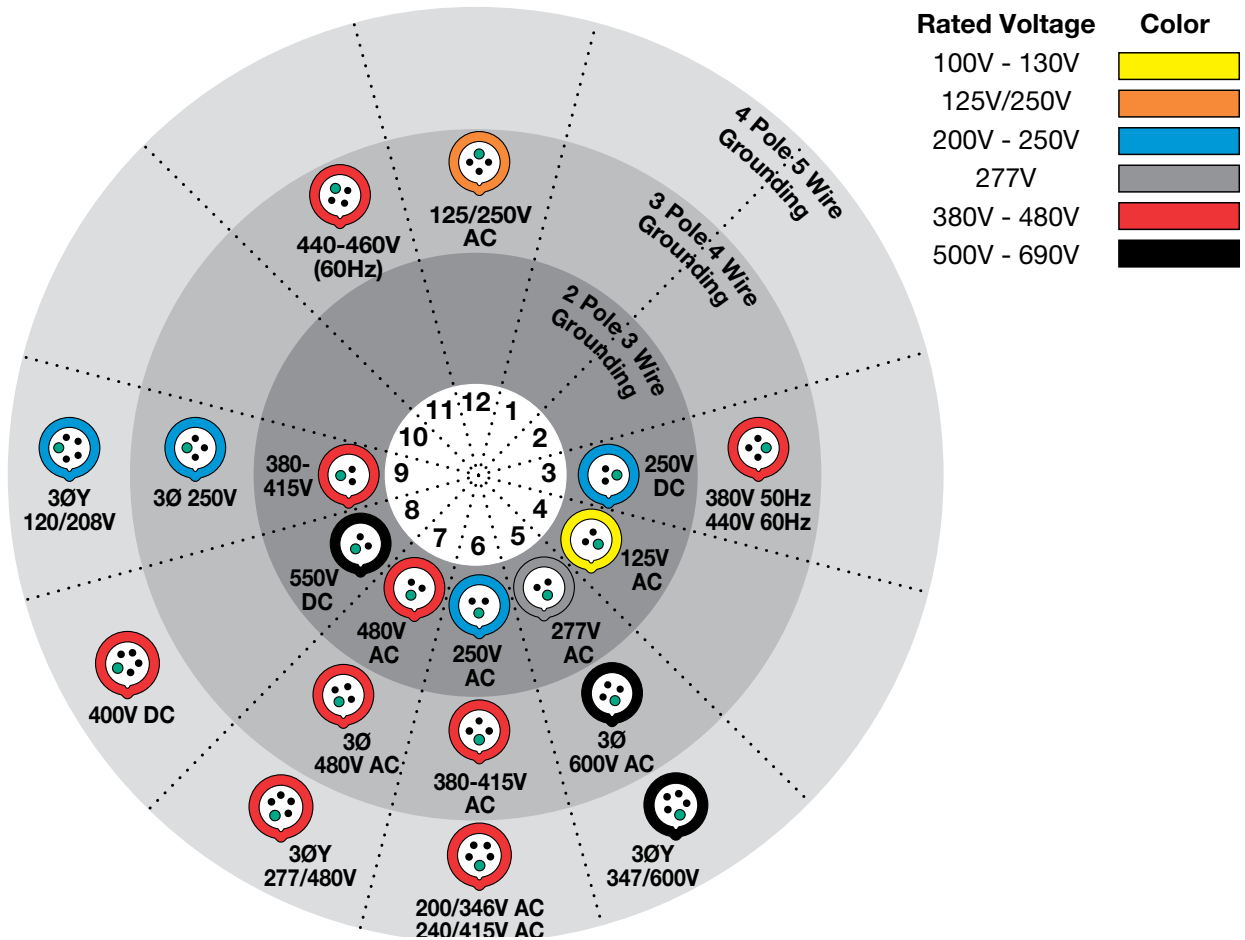

Typical IEC Pin and Sleeve Catalog Number

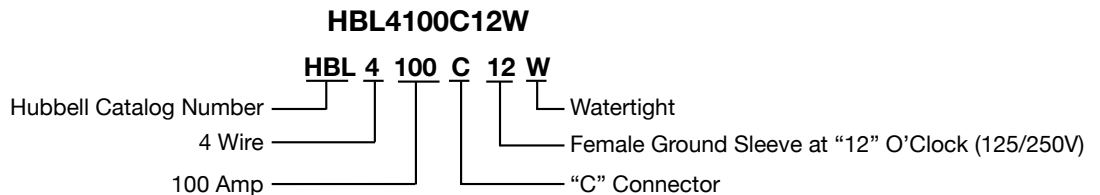

Explanation

- | | | | | | |
|---|---|---|---|---|---|
| <p>1 (HBL) Designates Hubbell Catalog Number</p> | <p>2 First Digit 3-3 wire 4-4 wire 5-5 wire</p> | <p>3 Next Series Of Digits Preceding a letter 20-20 Amp 30-30 Amp 60-60 Amp 100-100 Amp</p> | <p>4 Letter P-Plug R-Receptacle C-Connector B-Inlet MI-Mechanical Interlock MIF-Mechanical Interlock Fused</p> | <p>5 Last Digit(s) After the letter. This denotes the position of the ground sleeve and the assigned voltage in the receptacle as it relates to the hours of the clock. This is done to eliminate interchangeability between devices with different voltages.</p> | <p>6 Letter: W Watertight</p> |
|---|---|---|---|---|---|

| Rating | | | | | Watertight Devices | | | | Accessories | | | Replacement Interiors | | |
|--------|-----------------|-----------------------------|-------------|----------------------|--------------------|-------------|--------------|-------------|--------------|-----------|--------------------|-----------------------|-------------|------------|
| Amps | Poles and Wires | Configuration Recep./ Conn. | Plug/ Inlet | AC Voltage | Receptacle | Plug | Connector | Inlet | Back Boxes | | Closure Caps | Recep./ Conn. | Plug/ Inlet | |
| | | | | | | | | | Non-Metallic | Metallic† | | | | |
| 60 | 2P 3W | | | 125V | | HBL360R4W | HBL360P4W | HBL360C4W | HBL360B4W | BB60N | BB601W BB602W | PC60 | IN360AF | IN360AM |
| | 2P 3W | | | 250V | | HBL360R6W | HBL360P6W | HBL360C6W | HBL360B6W | BB60N | BB601W BB602W | PC60 | IN360BF | IN360BM† |
| | 2P 3W | | | 480V | | HBL360R7W | HBL360P7W | HBL360C7W | HBL360B7W | BB60N | BB601W BB602W | PC60 | IN360BF | IN360BM† |
| | 3P 4W | | | 125/250V | | HBL460R12W | HBL460P12W | HBL460C12W | HBL460B12W | BB60N | BB601W BB602W | PC60 | IN460CF | IN460CM |
| | 3P 4W | | | 3Ø 250V | | HBL460R9W | HBL460P9W | HBL460C9W | HBL460B9W | BB60N | BB601W BB602W | PC60 | IN460DF | IN460DM |
| | 3P 4W | | | 3Ø 480V | | HBL460R7W | HBL460P7W | HBL460C7W | HBL460B7W | BB60N | BB601W BB602W | PC60 | IN460DF | IN460DM |
| | 3P 4W | | | 3Ø 600V | | HBL460R5W | HBL460P5W | HBL460C5W | HBL460B5W | BB60N | BB601W BB602W | PC60 | IN460DF | IN460DM |
| | 4P 5W | | | 3ØY 120/208V | | HBL560R9W | HBL560P9W | HBL560C9W | HBL560B9W | BB60N | BB601W BB602W | PC60 | IN560EF | IN560EM† |
| | 4P 5W | | | 3ØY 277/480V | | HBL560R7W | HBL560P7W | HBL560C7W | HBL560B7W | BB60N | BB601W BB602W | PC60 | IN560EF | IN560EM† |
| | 4P 5W | | | 3ØY 347/600V | | HBL560R5W | HBL560P5W | HBL560C5W | HBL560B5W | BB60N | BB601W BB602W | PC60 | IN560EF | IN560EM† |
| 63 | 2P 3W | | | 220-240V | | HBL363R6W | HBL363P6W | HBL363C6W | HBL363B6W | BB60N | BB601W BB602W | PC60 | IN360BFS | IN360BMS† |
| | 3P 4W | | | 380-415V | | HBL463R6W | HBL463P6W | HBL463C6W | HBL463B6W | BB60N | BB601W BB602W | PC60 | IN460DFS | IN460DMS |
| | 4P 5W | | | 220/380V 240/415V | | HBL563R6W | HBL563P6W | HBL563C6W | HBL563B6W | BB60N | BB601W BB602W | PC60 | IN560EFS† | IN560EMS |
| 100 | 2P 3W | | | 125V | | HBL3100R4W | HBL3100P4W | HBL3100C4W | HBL3100B4W | BB100N | BB1001W BB1002W | PC100 | IN3100AF | IN3100AM |
| | 2P 3W | | | 250V | | HBL3100R6W | HBL3100P6W | HBL3100C6W | HBL3100B6W | BB100N | BB1001W BB1002W | PC100 | IN3100BF | IN3100BM† |
| | 2P 3W | | | 480V | | HBL3100R7W | HBL3100P7W | HBL3100C7W | HBL3100B7W | BB100N | BB1001W BB1002W | PC100 | IN3100BF | IN3100BM† |
| | 3P 4W | | | 125/250V | | HBL4100R12W | HBL4100P12W | HBL4100C12W | HBL4100B12W | BB100N | BB1001W BB1002W | PC100 | IN4100CF† | IN4100CM |
| | 3P 4W | | | 3Ø 250V | | HBL4100R9W | HBL4100P9W | HBL4100C9W | HBL4100B9W | BB100N | BB1001W BB1002W | PC100 | IN4100DF | IN4100DM |
| | 3P 4W | | | 3Ø 480V | | HBL4100R7W | HBL4100P7W | HBL4100C7W | HBL4100B7W | BB100N | BB1001W BB1002W | PC100 | IN4100DF | IN4100DM |
| | 3P 4W | | | 3Ø 600V | | HBL4100R5W | HBL4100P5W | HBL4100C5W | HBL4100B5W | BB100N | BB1001W BB1002W | PC100 | IN4100DF | IN4100DM |
| | 4P 5W | | | 3ØY 120/208V | | HBL5100R9W | HBL5100P9W** | HBL5100C9W | HBL5100B9W | BB100N | BB1001W BB1002W | PC100 | IN5100EF | IN5100EM |
| | 4P 5W | | | 3ØY 277/480V | | HBL5100R7W | HBL5100P7W | HBL5100C7W | HBL5100B7W | BB100N | BB1001W BB1002W | PC100 | IN5100EF | IN5100EM |
| | 4P 5W | | | 3ØY 347/600V | | HBL5100R5W | HBL5100P5W | HBL5100C5W | HBL5100B5W | BB100N | BB1001W BB1002W | PC100 | IN5100EF | IN5100EM |
| 125 | 2P 3W | | | 220-240V | | HBL3125R6W | HBL3125P6W | HBL3125C6W | HBL3125B6W | BB100N | BB1001W BB1002W | PC100 | IN3100BFS† | IN3100BMS† |
| | 3P 4W | | | 380-415V | | HBL4125R6W | HBL4125P6W | HBL4125C6W | HBL4125B6W | BB100N | BB1001W BB1002W | PC100 | IN4100DFS | IN4100DMS |
| | 4P 5W | | | 220/380V 240/415V | | HBL5125R6W | HBL5125P6W | HBL5125C6W | HBL5125B6W | BB100N | BB1001W BB1002W | PC100 | IN5100EFS | IN5100EMS |

Note: See page G-14 and G-15 for back boxes and accessories, G-16 and G-17 for product dimensions, G-18 and G-19 for product specifications and HP ratings.

All 63A and all 125A devices have pilot pins or contacts.

See page G-15 for closure caps, purchased separately. PC60 and PC100 are not UL or CSA.

*These boxes are cast aluminum, suitable for IP54 requirements and are finished with enamel paint.

**Short housing plug HBL5100P9WSH. IP22 suitability.

†Consult factory.