


FD Boxes and Angled Adapterspage 46

Introducing a fully UL Listed surface mount box engineered with features that allow easy, code compliant installation of all types of devices from 15A to 50A, including metallic ground bonding bracket, threaded conduit hubs and external mounting supports. Together with an industry first 55 degree angle adapter, the combination of devices is the only code compliant 45 cu.in. solution for 50A 4 wire installations. The angle adapter can also be installed separately for panel applications.



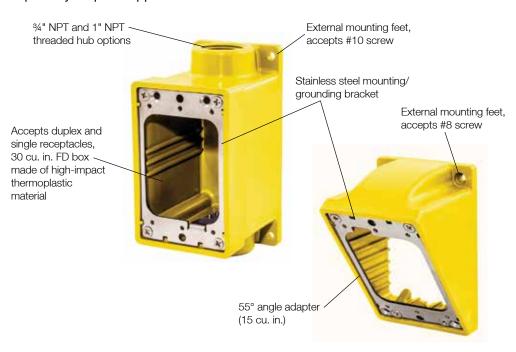

Hubbell Twist-Lock® Circuit Tester.....page 38

Styled and sized like a standard Hubbell Twist-Lock[®] Plug. Simply plug it in and the LED back panel immediately identifies if the connections are made correctly and are in the correct position, ensuring the device is wired properly. An easy to read card is provided with the tester, to help determine if the connections are correct. This tester is compact and can easily clip onto your tool belt. The Hubbell Circuit Tester is UL and C-UL Listed.





Ship-to-Shore Selection Chart - Dockside





YC310250 - 280' (85.3m) Yellow cable only. WC310280 - 280' (85.3m) White cable only.

HBI 61CM08 & HBI 61CM08I FD - 50' (15.2m) HBL61CM05 & HBL61CM05LED - 35' (10.7m) HBL61CM03 & HBL61CM03LED - 25' (7.6m)
HBL61CM08W & HBL61CM08WLED - 50' (15.2m) HBL61CM03W & HBL61CM03WLED - 25' (7.6m)



HBI 60CM31 HBL60CM31W HBL26CM11





HBI 74CM25WOA HBL74CM25WOAW



YC306250 - 250' (76.2m) Yellow cable only.










HBL61CM43 & HBL61CM43LED

YC406250 - 250' (76.2m) Yellow cable only.







HBL77CM16W

HBL77CM16 HBL77CM16W HBL63CM65

HBL63CM69



- 100' (30.4m) 4-Wire CS1004 - 75' (22.8m) 4-Wire CS100IT4 - 100' (30.4m) 3-Wire CS754IT4 - 75' (22.8m) 3-Wire

CW125IT4 - 125' (38.0m) One-ended cable set for winches. CW100IT4 - 100' (30.4m) One-ended cable set for winches. - 75' (22.8m) One-ended cable set for winches.

CS50EXT4 - 50' (15.2m) Extension cord.

CW100IT5 - 100' (30.4m) One-ended cable set for winches. CS50EXT5 - 50' (15.2m) Extension cord.





M4100P12

M4100C12

M4100R12



CS100IT5 - 100' (30.4m) 4-Wire **CS75IT5** - 75' (22.8m) 4-Wire



M5100P9 M5100P7



M5100C9 M5100C7



M5100R9 M5100R7



M5200PS1



M5200CS1



M5200RS1













HUBBELL® Wiring Device-Kellems