

Molded Case Circuit Breakers

External Accessories

Selection/Dimensions

NEG, HEG Motor Operators

Breaker Frame	Voltage	Catalog Number	List Price \$
EG	120/240AC, 125VDC	SEAR	CSO

Telemand® Motor Operator

Breaker Frame	AC Voltage	Hinged to Open Down	List Price \$
ED except CED	120	MOE6120	
	240	MOE6240▲	

ED motor operator opens downward.

Breaker Frame	DC Voltage	Hinged to Open Right	List Price \$	AC Voltage	Hinged to Open Right	List Price \$
FD	24	MOF6024DC▲		120	MOF6120	
	48	MOF6048DC▲		240	MOF6240	
	125	MOF6125DC▲				
JD, LD	24	MOJ6024DC▲		120	MOJ6120	
	48	MOJ6048DC▲		240	MOJ6240	
	125	MOJ6125DC▲				
LMD	24	MOLMD6024DC▲		120	MOLMD6120	
	48	MOLMD6048DC▲		240	MOLMD6240	
	125	MOLMD6125DC▲				
MD, ND, PD, RD	—	—		120	MOMN6120	
	—	—		240	MOMN6240	

To order FD through RD motor operators with Left side hinges, add "L" to catalog number (e.g. MOF6120L). List prices are the same.▲

Dimensions



Frame	A	B	C	D	E	F
ED	7.04	4.31	—	4.31	13.84	8.84
FD	9.50	4.55	1.60	6.84	9.70	7.58
JD, LD, LMD	11.00	7.50	0.79	8.34	9.85	7.74
MD, ND, PD, RD	16.00	9.00	—	9.83	13.13	10.13

Operating Currents

Catalog Number	On			Off			Reset (Amps)
	In-Rush (Amps)	Running (Amps)	Time (msec)	In-Rush (Amps)	Running (Amps)	Time (msec)	
MOE6120	10.25	2.3	550	10	2.3	400	2.3
MOE6240	5.2	1.1	500	5	1	330	1.1
MOF6120/L	13.6	5.5	200	13.6	5.5	175	5.5
MOF6240/L	7.6	3.5	200	7.6	3.5	185	3.5
MOLMD6120/L	13.6	6	210	13.6	6	185	6
MOJ6120/L	13.6	6	210	13.6	6	185	6
MOJ6240/L	7.6	3.5	217	7.6	3.5	185	3.5
MOMN6120/L	30.2	13.2	240	30.2	13.2	210	13.2
MOMN6240/L	14.7	6	260	14.7	6	230	6



FD, JD, LD, LMD, MD, ND, PD, RD Frames

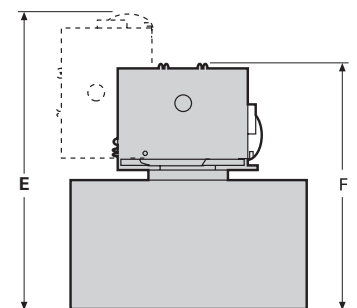

For inches / millimeters conversion, see Application Data section.

▲ Built to order. Allow 6–8 weeks for delivery.