

# THREADED PORCELAIN SOCKETS

Single Circuit



INCANDESCENT

## Threaded Porcelain Sockets


Threaded porcelain socket with unglazed porcelain body and aluminum screw shell. Wireway for side wiring. Available with choice of terminals or leads, steel adjustable counter rings. Grounding lead available only with metal caps or brackets.

### Cat. No. 20070 Series

- 660W-250V • UL Listed E-3810
- NOM Certified 057

### Cat. No. 20080-101

- 660W-250V • UL Listed E-3810

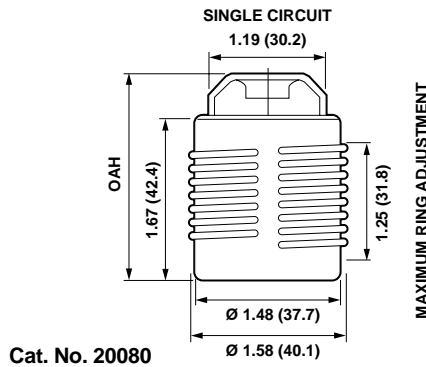

20070-100



20080-101

## Ordering Information




### WHEN ORDERING, PLEASE SPECIFY:

- Catalog number.
- Leads: type, length, color, stripping (and slitting, if type SPT), or termination.
- Position of leads:
  - Leads pulled through hickey or bushing; standard.
  - or
  - Leads not pulled through hickey or bushing.
  - or
  - Leads extend through wireway.
- Ring (*Order separately*): X-6485 steel ring  
X-9395 steel ring  
X-17624 steel ring
- Metal cap – with set screw is standard; less set screw, please specify.
- Phenolic cap with set screw available for BA-23554.
- Grounding lead available only with metal caps or brackets; if required, please specify.

### PACKAGING: Bulk

- Rings packed unassembled, bulk.
- Sockets with terminal screws; cap or bracket packed unassembled, bulk.
- Sockets with leads; cap or bracket assembled to socket, unless otherwise specified.

### HOW TO MEASURE LEAD LENGTH:

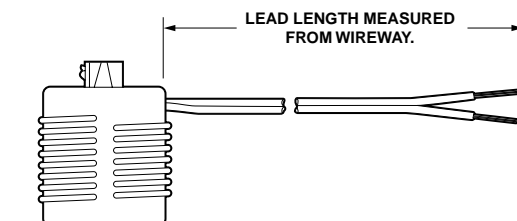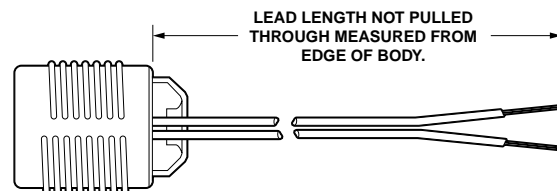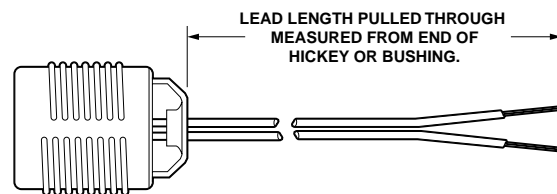

# THREADED PORCELAIN SOCKETS

## Single Circuit

### Caps

Socket dimensions shown on page F2

Socket less cap or bracket	1/8 IPS Light Duty Metal Cap X-3347-S OAH†: 2 1/16 (52.39)	1/8 IPS Heavy Duty Metal Cap X-2740-S OAH†: 2 3/16 (55.56)	1/4 IPS Metal Cap X-12312-S OAH†: 2 3/16 (55.56)	3/8 IPS Metal Cap X-1412-S OAH†: 2 3/16 (55.56)
With Terminal 20080-198	With Terminals 20070-100	With Terminals 20070-140	With Terminals 20071-100	With Terminals 20072-100
With Leads 20080-199	With Leads 20070-101	With Leads 20070-141	With Leads 20071-101	With Leads 20072-101

1/2 IPS Metal Cap X-14274-S OAH†: 2 13/32 (61.12)	1/8 IPS Phenolic Cap available w/ss BA-23554 OAH†: 2 9/16 (65.09)
With Terminals 20073-100	With Terminals 20070-130
With Leads 20073-101	With Leads 20070-131

†OAH: Overall height, including socket and cap or bracket.