

**Canadian 347V AC Quiet Rocker Switches**

**Back and Side Wired 15 AMP 347V AC**

| DESCRIPTION               | CAT. NO. | COLOR*        |
|---------------------------|----------|---------------|
| Single-Pole Rocker Switch | 5691-C   | I, W, A, G, E |
| 3-Way Rocker Switch       | 5693-C   | I, W, A, E    |
| 4-Way Rocker Switch       | 5694-C   | W             |



**Back and Side Wired 20 AMP 347V AC**

| DESCRIPTION               | CAT. NO. | COLOR* |
|---------------------------|----------|--------|
| Single-Pole Rocker Switch | 5621-C   | W      |
| 3-Way Rocker Switch       | 5623-C   | W      |
| 4-Way Rocker Switch       | 5624-C   | W      |

**Midway Nylon Wallplates**

**For Canadian 347V Decora Devices**

| DESCRIPTION     | CAT. NO. | COLOR*        |
|-----------------|----------|---------------|
| 1-Gang 1-Decora | 80401-CN | I, W, A, G, E |
| 2-Gang 2-Decora | 80409-CN | I, W, A, G, E |
| 3-Gang 3-Decora | 80411-CN | I, W, G, E    |
| 4-Gang 4-Decora | 80412-CN | I, W, G       |

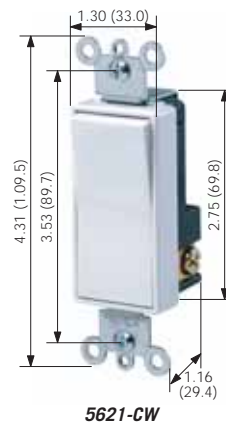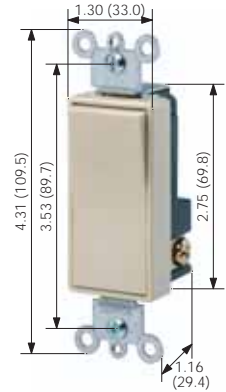

**SPECIFICATIONS AND FEATURES**

- New architecturally-styled smooth-action concave rocker
- Heavy-duty impact-resistant thermoplastic construction for long service life in commercial applications
- Full rated current capacity with tungsten, fluorescent or resistive loads. Motor capacity is 80% of switch rating
- Wrap-around heavy-gauge strap with locking tabs for added strength
- Back and side-wiring terminals accept both solid and stranded wire to ease installation
- Green grounding screw
- Canadian 347V Decora wallplates available in a number of colors
- **Note:** Decora Plus Canadian 347V switches fit only those wallplates designated for 347V AC devices
- **Note:** Canadian 347V Decora wallplates fit "Commander Type" boxes

**TESTING AND CODE COMPLIANCE**

- Switches**
- UL Listed (File #E-7458)
  - CSA Certified (File #LR-3413)
- Wallplates**
- UL Listed (File #E-13397)
  - CSA (File #LR-16347)
  - NOM Certified (#057)
  - Fully compliant with NEMA Standards WD-1
  - Backed by a Limited 10-Year Warranty

**\*COLOR**

For color selection, add suffix to catalog number as follows: Ivory (-I), White (-W), Almond (-A), Gray (-G), Black (-E) and Red (-R).

**MATERIAL CHARACTERISTICS**

Environmental: Flammability UL-94, V2 Rating  
 Operating Temperature: -40°C to 120°C