


### MOS QUICKPORT® ADAPTERS AND BLANK MODULES

Description	White	Ivory	Lt. Almond	Grey	Black
[M] 1-Port QuickPort Module (1 unit high)	41291-1MW	41291-1MI	41291-1MT	41291-1MG	41291-1ME
[N] 2-Port QuickPort Module (1 unit high)	41291-2QW	41291-2QI	41291-2QT	41291-2QG	41291-2QE
[O] 2-Port Angled QuickPort Module (1.5 units high)	41294-2QW	41294-2QI	41294-2QT	41291-2QG	41294-2QE
[P] Blank Module (0.5 units high)	41295-5BW	41295-5BI	41295-5BT	41295-5BG	41295-5BE
[Q] Blank Module (1 unit high)	41291-1BW	41291-1BI	41291-1BT	41291-1BG	41291-1BE
[R] Blank Module (1.5 units high)	41294-2BW	41294-2BI	41294-1BT	41294-2BG	41294-2BE
[S] Blank Module (2 units high)	41292-2BW	41292-2BI	41292-2BT	41292-2BG	41292-2BE
[T] Decora Insert, holds one 1 unit high MOS Module	41649-00W	41649-00I			



### MOS FIBER INSERTS

Description	White	Ivory	Lt. Almond	Grey	Black
[A] 1 Duplex SC, zirconia ceramic, SM (1 unit high)	41291-2CW	41291-2CI	41291-2CT	41291-2CG	41291-2CE
1 Duplex SC, phos. bronze, MM (1 unit high)	41291-PCW	41291-PCI	41291-PCT	41291-PCG	41291-PCE
[B] 1 Duplex SC, zirconia ceramic, SM, 45° exit (1.5 units high)	41294-2CW	41294-2CI	41294-2CT	41294-2CG	41294-2CE
1 Duplex SC, phos. bronze, MM, 45° exit (1.5 units high)	41294-PCW	41294-PCI	41294-PCT	41294-PCG	41294-PCE
[C] 1 Duplex SC, zirconia ceramic, SM, 45° exit (2 units high)	41292-2CW	41292-2CI	41292-2CT	41292-2CG	41292-2CE
1 Duplex SC, phos. bronze, MM, 45° exit (2 units high)	41292-PCW	41292-PCI	41292-PCT	41292-PCG	41292-PCE
[D] 2 Duplex SC, zirconia ceramic, SM, 45° exit (3 units high)	41293-4CW	41293-4CI	41293-4CT	41293-4CG	41293-4CE
2 Duplex SC, phos. bronze, MM, 45° exit (3 units high)	41293-PCW	41293-PCI	41293-PCT	41293-PCG	41293-PCE
1 Duplex ST, zirconia ceramic, SM, (1 unit high)	41291-ZTW	41291-ZTI	41291-ZTT	41291-ZTG	41291-ZTE
[E] 1 Duplex ST, phos. bronze, MM, (1 unit high)	41291-2TW	41291-2TI	41291-2TT	41291-2TG	41291-2TE
1 Duplex ST, zirconia ceramic, SM, 45° exit (1.5 units high)	41294-ZTW	41294-ZTI	41294-ZTT	41294-ZTG	41294-ZTE
[F] 1 Duplex ST, phos. bronze, MM, 45° exit (1.5 units high)	41294-2TW	41294-2TI	41294-2TT	41294-2TG	41294-2TE
1 Duplex ST, zirconia ceramic, SM, 45° exit (2 units high)	41292-ZTW	41292-ZTI	41292-ZTT	41292-ZTG	41292-ZTE
[G] 1 Duplex ST, phos. bronze, MM, 45° exit (2 units high)	41292-2TW	41292-2TI	41292-2TT	41292-2TG	41292-2TE
1 Duplex ST, zirconia ceramic, SM, 45° exit (2 units high)	41293-ZTW	41293-ZTI	41293-ZTT	41293-ZTG	41293-ZTE
[H] 2 Duplex ST, phos. bronze, MM, 45° exit (3 units high)	41293-4TW	41293-4TI	41293-4TT	41293-4TG	41293-4TE

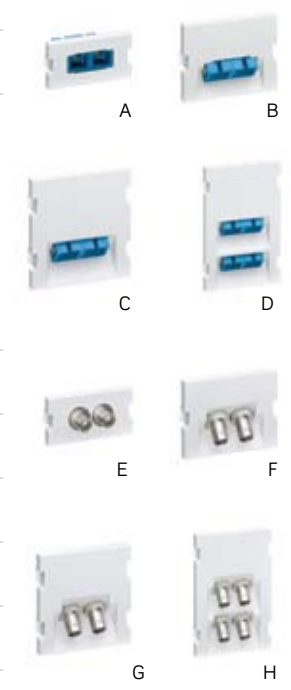

#### MATERIAL CHARACTERISTICS

- High-impact, fire-retardant, plastic rated UL 94V-0.

#### COLOR

- For color selection, add suffix to Cat. No. as follows: White (-W), Ivory (-I), Lt. Almond (-T), Grey (-G), Black (-E)