


# 15 AMP 250V, 277V and 3Ø 250V


## Industrial Grade Locking Devices



4570-CA



4570-CY

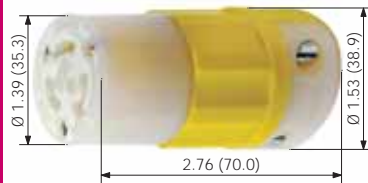

4579-CY

**Cord Clamp Range**—Black & White Plugs and Connectors: .240"–.700" #18–#10 AWG

### 15 AMP 250V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	NEMA CONFIG.
Duplex Flush Receptacle, Self Grounding, Back and Side Wired	4550	
Duplex Flush Receptacle, Isolated Ground, Back and Side Wired	4550-IG	
Single Flush Receptacle	4560	
Single Flush Receptacle, Isolated Ground	4560-IG	
Locking Plug, Black & White Nylon Body	4570-C	
Power Indication™ Locking Plug, Black & White Nylon Body	4570-PLC	
Angle Locking Plug, Black & White Nylon Body	4570-CA	L6-15P  L6-15R
Locking Plug, Yellow Nylon Body	4570-CY	
Locking Connector, Black & White Nylon Body	4579-C	
Power Indication™ Locking Connector, Black & White Nylon Body	4579-PLC	
Locking Connector, Yellow Nylon Body	4579-CY	
Locking Flanged Outlet	4585-C	
Locking Flanged Inlet	4586-C	

### 15 AMP 277V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	NEMA CONFIG.
Duplex Flush Receptacle, Self Grounding, Back and Side Wired	4750	
Duplex Flush Receptacle, Isolated Ground, Back and Side Wired	4750-IG	
Single Flush Receptacle	4760	
Single Flush Receptacle, Isolated Ground	4760-IG	
Locking Plug, Black & White Nylon Body	4770-C	
Power Indication™ Locking Plug, Black & White Nylon Body	4770-PLC	
Angle Locking Plug, Black & White Nylon Body	4770-CA	L7-15P  L7-15R
Locking Plug, Yellow Nylon Body	4770-CY	
Locking Connector, Black & White Nylon Body	4779-C	
Locking Connector, Yellow Nylon Body	4779-CY	
Power Indication™ Locking Connector, Black & White Nylon Body	4779-PLC	
Locking Flanged Outlet	4785-C	
Locking Flanged Inlet	4786-C	

### 15 AMP 3Ø 250V 3-Pole 3-Wire Non-Grounding

DESCRIPTION	CAT. NO.	NEMA CONFIG.
Single Flush Receptacle	4870	
Locking Plug, Black & White Nylon Body	4880-C	L11-15P  L11-15R
Locking Connector, Black & White Nylon Body	4889-C	

*Weather-Resistant Boots for 15A Locking Plugs and Connectors are listed on page N27*

### Wallplates and Covers

302 STAINLESS STEEL SINGLE RECEPTACLE	302 STAINLESS STEEL DUPLEX RECEPTACLE	WEATHER-RESISTANT FLIP LID COVER FOR INLETS AND OUTLETS
1.41" Dia. Opening		IP64 Rated—Includes Gasket and Screws
84004-40	84003-40	WP1

*For complete wallplate selection, see Section E.*

#### SPECIFICATIONS AND FEATURES

##### Locking Flush Receptacles

- Rugged nylon body and cover for outstanding resistance to impact and harsh chemicals
- Double-wipe phosphor-bronze power contacts

##### Locking Plugs and Connectors

- Super tough Nylon body resists damage from severe impact, abrasion and chemicals
- Ergonomic, fluted body design with radial grip ridge is ideal for gripping, turning and pulling
- Cord clamp does not have to be disassembled from body for wiring—accepts all wire mesh strain reliefs

- One-piece, rivetless .035" thick brass connector contacts and solid brass plug blades provide maximum conductivity and long service life
- Power Indication™ 15A Locking Plugs & Connectors equipped with green neon bulb rated at 30,000 hours (24/7) for 3.5 years

##### Flanged Inlets and Outlets

- Rugged nylon flange fits flush and won't crack in high-abuse applications
- Individual deep-funneled chamfered wire wells guide each wire into rectangular chambers
- Wire clamps provide positive crimp lock without cutting wire strands

#### TESTING AND CODE COMPLIANCE

- All receptacles, plugs, connectors, inlets and outlets are designed to meet NEMA WD-6, and ANSI C-73, and to meet/exceed UL 498 standards
- UL Fed Spec. Listed WC-596 – Plugs, Connectors and Flanged Inlets (File #E-13393), Receptacles and Flanged Outlets (File #E-13399)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Lifetime Warranty

#### MATERIAL CHARACTERISTICS

Environmental: Flammability Rated V2 per UL94  
Operating Temperature: -40°C to 60°C