

15A, 20A | Traditional Receptacles | Hospital Grade


Extra Heavy-Duty Hospital Grade Receptacles

Leviton Extra Heavy-Duty Hospital Grade Receptacles meet or exceed the performance requirements for the coveted UL Hospital Grade listing. They are offered in standard, tamper-resistant, power indication, illuminated and isolated ground versions of Leviton's conventional and Decora Plus™ duplex configurations. Leviton also offers a version specifically designed for use in MRI and other applications exposed to high magnetic fields.


Features and Benefits

- Exclusive V-shaped, serrated back-wiring clamps for superior contact and conductivity
- Back and side wiring options accept #14-#10 AWG stranded or solid wire
- UL 498 listed (HG), CSA and NOM certified
- Meets NEMA WD-1 and 6 and ANSI standards Fed Spec
- Backed by a limited 10-year warranty

8300-SGW

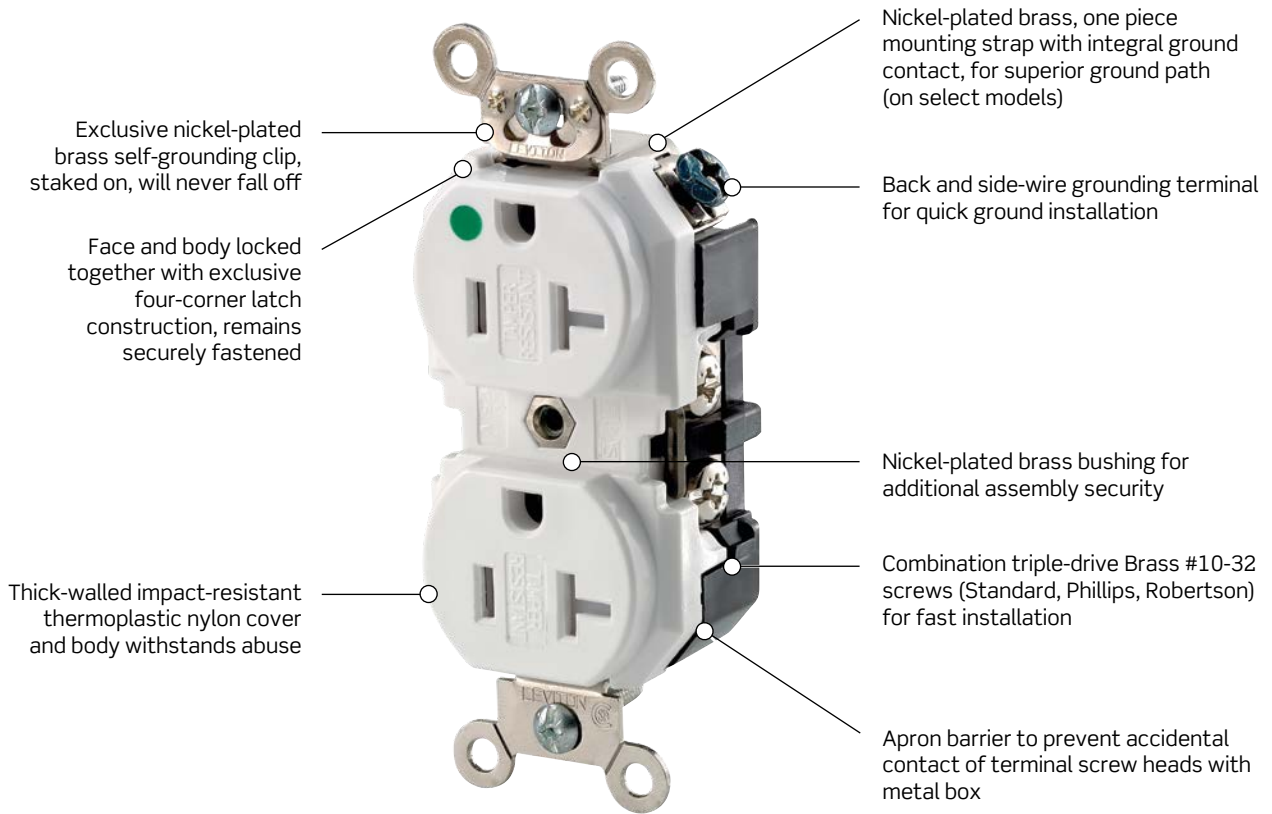

Color Choices Hospital straight blade devices are offered in a wide range of colors. To order colors, add suffix to Cat. No.

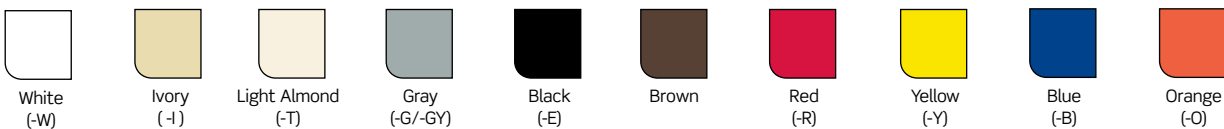

Related Products

Leviton also offers Decora Plus™ and Lev-Lok® Decora Plus™ Hospital Grade devices. For more information see the Hospital Grade Devices section, page I-6 for Decora Plus™ and page I-16 for Lev-Lok® Decora Plus™.

Hospital Grade, Extra Heavy-Duty Four-In-One

Features and Benefits

- Terminal wiring screws fit inside a standard single gang wallbox; adapter plate not required (optional)
- Impact resistant nylon cover and base for strength and resistance to chemicals and corrosives
- Easy-to-read voltage and amperage rating molded onto face
- Extra heavy-duty, T-type triple-wipe bronze contacts for maximum performance
- Ground holes configured up or down to be outside the device, accommodating up to 4 Fed Spec size straight or angled plugs
- #8 terminal screws accept up to #12 solid or stranded copper wire
- Termination anchor holes for easy conductor wiring
- Exclusive shield-wall design protects ground connection from contact with live circuit conductors
- “A” and “B” molded on face and back for easy identification of receptacle pairs for split-circuit conversion
(Note: Split circuit not available on surge models)
- Convenient built-in strip-gauge
- Backed by a limited 10-year warranty

2-Pole, 3-Wire Grounding

Rating	15A-125V		20A-125V	
NEMA				
	5-15R		5-20R	
Description	Color	Cat. No.	Cat. No.	
Four-In-One	White	1254-HW	21254-HW	
	Ivory	1254-HI	21254-HI	
	Gray	—	21254-HGY	
	Brown	1254-H	21254-H	
	Red	1254-HR	21254-HR	
Four-In-One Isolated Ground	White	—	21254-IGW	
	Ivory	—	21254-IGI	
	Orange	1254-IG	21254-IG	
Four-In-One Adapter Plates	White	3254-W	—	
	Ivory	3254-I	—	
	Gray	3254-GY	—	
	Black	3254-E	—	
	Red	3254-R	—	
	Brown	3254	—	
	Blue	3254-BLU	—	
	Orange	3254-OR	—	
Four-In-One Portable Boxes	Ivory	4254-I	—	
	Gray	4254-GY	—	
	Black	4254-E	—	
	Orange	4254-OR	—	
	Yellow	4254-Y	—	



1254-HW



4254-Y

Portable boxes are not UL Listed. UL Listing does not apply when Four-In-One receptacles are used with portable boxes for extension cord applications

Four-In-One Receptacle Wallbox Mounting


Mounts Directly

Single-Gang 4" Octagonal 4" Square



Mounts with Adapter Plate

2-Gang 4¹¹/₁₆" Square



Related Products

Leviton also offers superior quality recessed devices. See pages Q-32 to Q-33 in the Connected Home section for more information.