

### Decora Plus™ AC Quiet Commercial Specification Grade Rocker Switches

Decora Plus™ devices combine designer styling with all the benefits of rugged commercial grade construction. The robust product offering includes: single pole, double pole, 3- and 4-way switches, momentary and maintained contact switches, as well as pilot light and illuminated switches.

#### Features and Benefits

- Engineered for fine tolerances and top performance
- Decora Plus™ switches feature impact resistant thermoplastic construction for long service life
- All Decora® devices meet or exceed applicable UL, CSA and NOM testing standards


#### AC Quiet Rocker Switches

- Full rated current capacity with tungsten, fluorescent or resistive loads. Motor capacity is 80% of switch rating
- Back and side wiring terminals accept both solid and stranded wire to ease installation
- Architecturally-styled smooth-action concave rocker
- Heavy-duty impact-resistant thermoplastic construction for long service life in commercial applications
- Two ground connection options: a green grounding screw and a self-grounding clip
- Backed by a limited 10-year warranty

#### Canadian Switches

- Canadian Decora® wallplates available in a number of colors and fit “Commander Type” boxes

#### 5691-2I

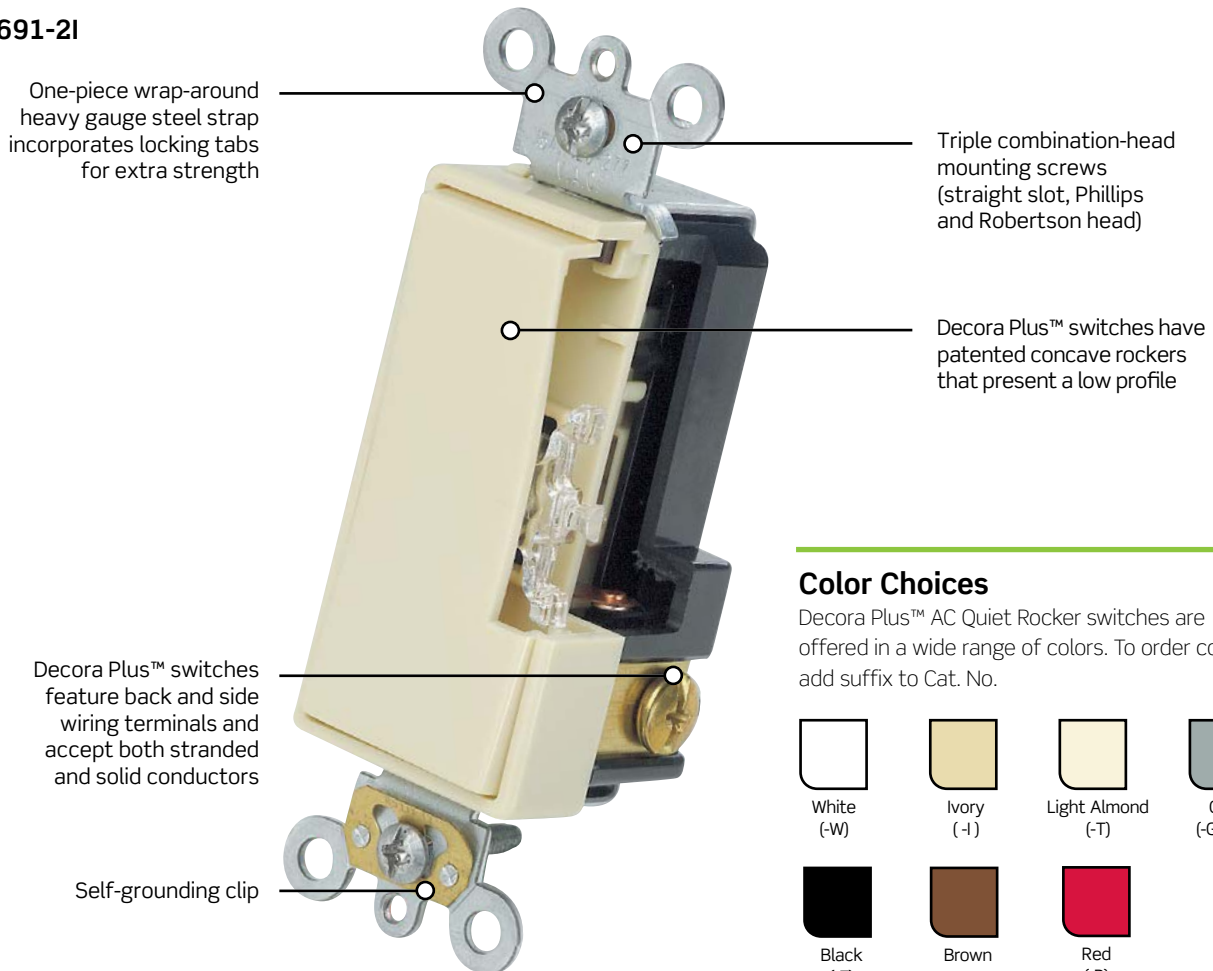

#### Color Choices

Decora Plus™ AC Quiet Rocker switches are offered in a wide range of colors. To order colors, add suffix to Cat. No.

			
White (-W)	Ivory (-I)	Light Almond (-T)	Gray (-G/-GY)
			
Black (-E)	Brown	Red (-R)	

## APPLIANCE SWITCHES

## Appliance Switches

## Features and Benefits

## Single Pole Pull Chain Switches

- Standard finish of metal chain is nickel
- Standard leads are #18 AWG 105°C plastic, 6" long, stripped 1/2"
- 3 3/4" chain connector, 3' braided cord, end bell
- Bushing 3/8" - 27 x 3/8" long
- Piercing 13/32" dia

## Door Jamb Switch

- Bushing 15/32-32 x 9/16" long

Single Pole Pull Chain Switches  

Rating	3A 125VAC-L	6A-125VAC	3A-250VAC	1/4 HP 125/250V
Description	Sequence			Cat. No.
Heavy Duty, Single Circuit, Black and Red Leads	ON-OFF (L1, OFF)			1689-75
Heavy Duty, Two Circuit, Four Positions, Black, Blue, Red Leads	LOW-MED-HIGH-OFF (L1, L2, L1 & 2, OFF)			1689-50
Heavy Duty, Two Speed, Four Positions, Black, Blue, Red Leads	ONE-OFF-TWO-OFF (L1, L2, L3, OFF)			1691-50

Rating	3A-125V	1A-125VT	1A-250V	
Description	Sequence			Cat. No.
Compact, Single Circuit, Black Leads	ON-OFF			10097-8

Rating	3A-125VAC-L	6A-125VAC	3A-250VAC	
Description	Sequence			Cat. No.
Compact, Single Circuit, Black Leads	ON-OFF			10041-500

Push-Button Door Jamb Switch  

Rating	3A-125V			
Description	Sequence			Cat. No.
Single Circuit, Momentary, Metal Pushbutton, #18 AWG Leads, with Jamb Box, Mounting Screws and Cover Plate	NORMALLY ON			1865

Feed-Through Cord Switch  

Rating	3A-125V 1/2 HP 125V		
Description	Sequence	Color	Cat. No.
Heavy Duty, Single Pole, 18/2 - 16/2 Type SPT-1, SPT-2 or Round Cord 18/2, Type SVT and other cords up to 9/32" outer jacket	ON-OFF	White	5410-W
		Ivory	5410-I
		Brown	5410

Miniature Feed-Through Cord Switch  

Rating	3A-125V 1/2 HP 125V		
Description	Sequence	Color	Cat. No.
Miniature Single Pole, Captive Screw (for use with #18 ga. SPT-1 conductors)	ON-OFF	White	423-3W
		Ivory	423-3I
		Brown	423-3



1689-75



10097-8



1865



5410-W



423-3I