INDUSTRIAL



15A, 20A | Traditional Receptacles | Hospital Grade


Extra Heavy-Duty Hospital Grade Receptacles

Leviton Extra Heavy-Duty Hospital Grade Receptacles meet or exceed the performance requirements for the coveted UL Hospital Grade listing. They are offered in standard, tamper-resistant, power indication, illuminated and isolated ground versions of Leviton's conventional and Decora Plus™ duplex configurations. Leviton also offers a version specifically designed for use in MRI and other applications exposed to high magnetic fields.

Features and Benefits

- Exclusive V-shaped, serrated back-wiring clamps for superior contact and conductivity
- Back and side wiring options accept #14-#10 AWG stranded or solid wire
- UL 498 listed (HG), CSA and NOM certified
- Meets NEMA WD-1 and 6 and ANSI standards Fed Spec
- Backed by a limited 10-year warranty

8300-SGW

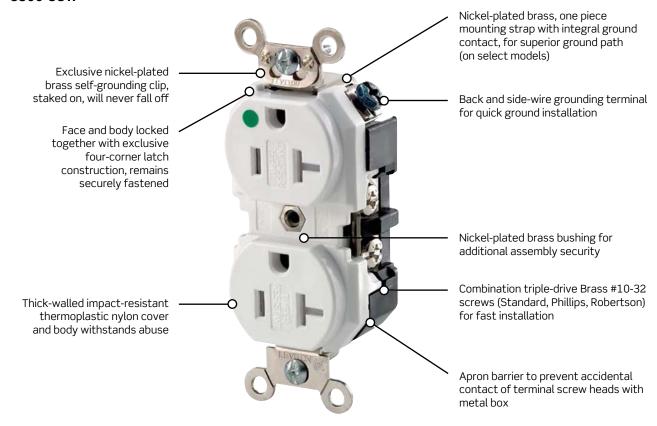

Color Choices Hospital straight blade devices are offered in a wide range of colors. To order colors, add suffix to Cat. No.





Related Products

Leviton also offers Decora Plus™ and Lev-Lok® Decora Plus™ Hospital Grade devices. For more information see the Hospital Grade Devices section, page I-6 for Decora Plus™ and page I-16 for Lev-Lok® Decora Plus™.





15A, 20A | Traditional Receptacles | Dual Voltage

Dual Voltage

Commercial Grade, Dual Voltage Side Wired, Self-Grounding ® ®					
Rating		15A-125V/15A-250V	20A-125V/20A-250V		
NEMA		5-15R 6-15R	0° 0° 5-20R 6-20R		
Description	Color	Cat. No.	Cat. No.		
Duplex	White Ivory Brown	5031-W 5031-I 5031	 5842-I 5842		



Decora® Commercial Grade, Dual Voltage Heavy-Duty Back and Side Wired, Self-Grounding ® ®					
Rating		15A-125V/15A-250V			
NEMA		0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
Description	Color	Cat. No.			
Duplex, Dual Voltage	White Ivory	16292-W 16292-I			



Industrial, Dual Voltage Extra Heavy-Duty Back and Side Wired 🕬 🏽 🕏				
Rating		15A-125V/15A-250V		
NEMA		5-15R 6-15R		
Description	Color	Cat. No.		
Heavy-Duty, Spec	lvory	5292-1		
Grade Duplex	Brown	5292		



5844-l

Commercial Grade, Dual Voltage Back and Side Wired, Self-Grounding ® ®				
Rating		20A-125V/20A-250V		
NEMA		0° 0° 5-20R 6-20R		
Description	Color	Cat. No.		
Duplex	lvory	5844-1		
	Brown	5844		