


Lev-Lok®

Wiring Modules

Features and Benefits

- Modules are constructed of an impact resistant polycarbonate
- #12 AWG THHN wire leads, 6" length, either solid or stranded wire
- Available with 4-port pushwire connector for even faster installation
- Wiring module locks and latches to the device body providing double the connection security
- Wiring modules are shipped with protective cover and factory-installed circuit ID label
- Backed by a limited 10-year warranty

Wiring modules include factory-installed circuit ID label so that electricians can save a step by labeling device locations during rough-in

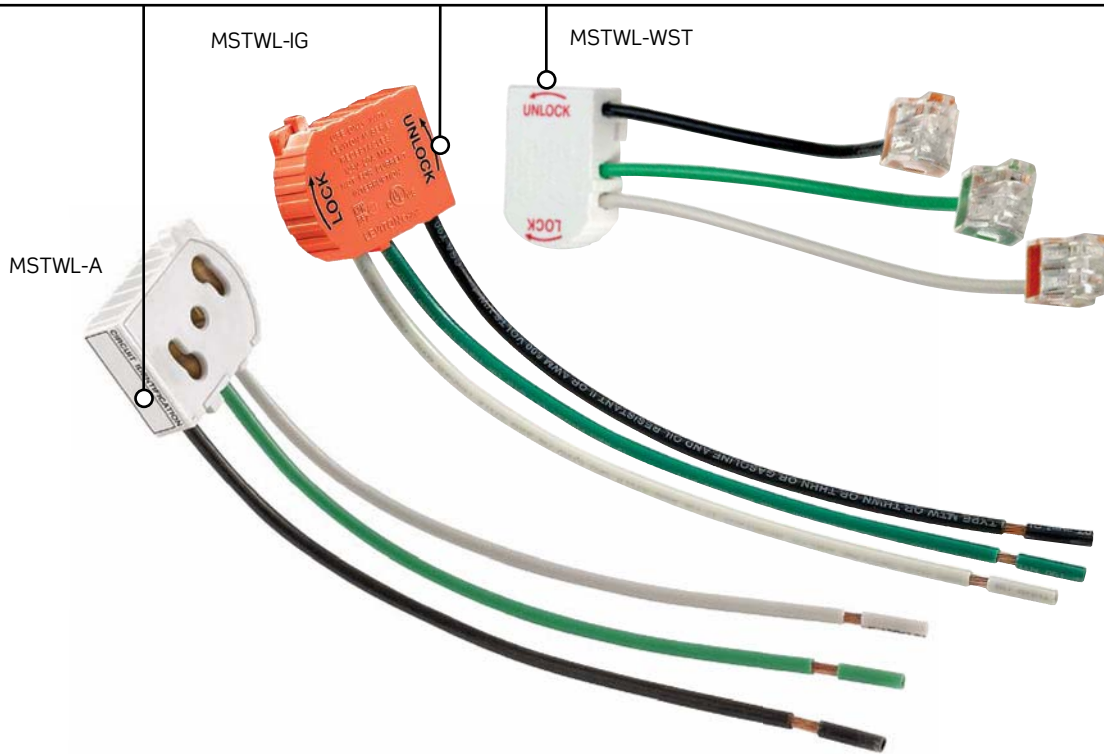

Lev-Lok® Wiring Modules

Device Type	Description	Color	Cat. No.
Receptacles	Stranded Wire Leads	White	MSTWL-A*
	Stranded Wire Leads (for emergency circuits)	Red	MSTWL-R*
	Stranded Wire Leads with 4-port push wire connectors	White	MSTWL-WST*
	Solid Wire Leads	White	MSTWL-SDA*
	Solid Wire Leads with 4-port push wire connectors	White	MSTWL-WSD*
IG Receptacles	Stranded Wire Leads	Orange	MSTWL-IG*
	Stranded Wire Leads with 4-port push wire connectors	Orange	MSTWL-WIG*
	Solid Wire Leads	Orange	MSTWL-SIG*
	Stranded XHHW-2 Wire for Low Leakage Circuits**	White	MSTWL-XA***
	Stranded XHHW-2 Wire for Low Leakage Circuits	White	MSTWL-X1***
	Stranded XHHW-2 Wire for Low Leakage Circuits	White	MSTWL-XN***
Switches	Stranded Wire Leads	Yellow	MSPSW-ST
	Solid Wire Leads	Yellow	MSPSW-SD

*Custom lead lengths available upon request.

**With orange, brown and green wires.

***Add suffix of 0 for 6", 1 for 12", 2 for 24" or 3 for 36" long leads; please allow 4 to 6 weeks for delivery

GFCIs and AFCIs

INDUSTRIAL TAMPER-RESISTANT AND NON TAMPER-RESISTANT RECEPTACLES



GFCI RECEPTACLES | Lev-Lok® Heavy Duty Spec Grade | Wiring Modules

SmartlockPro® Heavy-Duty Self-Test GFCI Receptacles

2-Pole, 3-Wire Grounding			
Rating		15A-125V	20A-125V
NEMA		5-15R	5-20R
Description	Color	Cat. No.	Cat. No.
Duplex	White	MGFN1-W	MGFN2-W
	Ivory	MGFN1-I	MGFN2-I
	Light Almond	MGFN1-T	MGFN2-T
	Gray	MGFN1-GY	MGFN2-GY
	Black	MGFN1-E	MGFN2-E
	Brown	MGFN1	MGFN2
	Red	MGFN1-R	MGFN2-R
Duplex, Tamper Resistant	White	MGFT1-W	MGFT2-W
	Ivory	MGFT1-I	MGFT2-I
	Light Almond	MGFT1-T	MGFT2-T
	Gray	MGFT1-GY	MGFT2-GY
	Black	MGFT1-E	MGFT2-E
	Brown	MGFT1	MGFT2
	Red	MGFT1-R	MGFT2-R



MT789-W

Lev-Lok® Wiring Modules

Lev-Lok® Receptacle Wiring Modules			
Device Type	Description	Color	Cat. No.
Receptacles	Stranded	White	MSTWL-A*
	Stranded with Push-Wire Connectors	White	MSTWL-WST*
	Stranded for Emergency Circuits	Red	MSTWL-R*
	Stranded for Isolated Ground Circuits	Orange	MSTWL-IG*
	Stranded with Push-Wire Connectors for Isolated Ground Circuits	Orange	MSTWL-WIG*
	Solid	White	MSTWL-SDA*
	Solid for Isolated Ground Circuits	Orange	MSTWL-SIG*
	Solid with Push-Wire Connectors	White	MSTWL-WSD*
	Stranded XHHW-2 Wire for Low Leakage Circuits**	White	MSTWL-XA***
	Stranded XHHW-2 Wire for Low Leakage Circuits	White	MSTWL-X1***
	Stranded XHHW-2 Wire for Low Leakage Circuits	White	MSTWL-XN***



MSTWL-A Wiring Module

*Custom lead lengths available upon request.

**With orange, brown and green wires.

***Add suffix of 0 for 6", 1 for 12", 2 for 24" or 3 for 36" long leads; please allow 4 to 6 weeks for delivery

SPOTLIGHT

Self-Test

There is a new revision to the UL 943 standard effective June 29, 2015. This new standard requires all GFCI receptacle manufacturers to produce GFCIs with an auto-monitoring (self-test) feature that automatically conducts a periodic internal test to confirm the GFCI is able respond to a ground fault. If a problem is detected during the self-test, the GFCI must automatically trip and deny power or provide a visual and/or audible indication. Visit www.leviton.com/selftest for more information.




RECEPTACLES | Lev-Lok®

Lev-Lok® Wiring Modules

Features and Benefits

- Modules are constructed of an impact resistant polycarbonate
- #12 AWG THHN wire leads, 6" length, either solid or stranded wire
- Available with 4-port pushwire connector for even faster installation
- Wiring module locks and latches to the device body providing double the connection security
- Wiring modules are shipped with protective cover and factory-installed circuit ID label
- Backed by a limited 10-year warranty

Wiring modules include factory-installed circuit ID label so that electricians can save a step by labeling device locations during rough-in

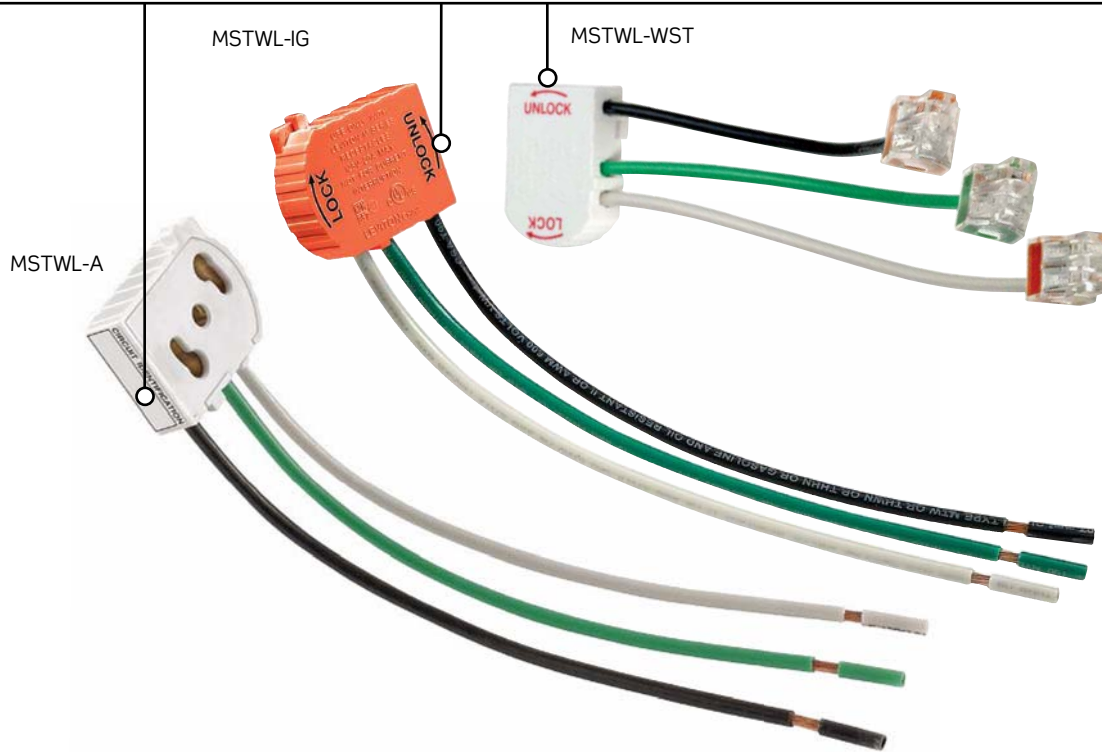

Lev-Lok® Wiring Modules

Device Type	Description	Color	Cat. No.
Receptacles	Stranded Wire Leads	White	MSTWL-A*
	Stranded Wire Leads (for emergency circuits)	Red	MSTWL-R*
	Stranded Wire Leads with 4-port push wire connectors	White	MSTWL-WST*
	Solid Wire Leads	White	MSTWL-SDA*
	Solid Wire Leads with 4-port push wire connectors	White	MSTWL-WSD*
IG Receptacles	Stranded Wire Leads	Orange	MSTWL-IG*
	Stranded Wire Leads with 4-port push wire connectors	Orange	MSTWL-WIG*
	Solid Wire Leads	Orange	MSTWL-SIG*
	Stranded XHHW-2 Wire for Low Leakage Circuits**	White	MSTWL-XA***
	Stranded XHHW-2 Wire for Low Leakage Circuits	White	MSTWL-X1***
	Stranded XHHW-2 Wire for Low Leakage Circuits	White	MSTWL-XN***
Switches	Stranded Wire Leads	Yellow	MSPSW-ST
	Solid Wire Leads	Yellow	MSPSW-SD

*Custom lead lengths available upon request.

**With orange, brown and green wires.

***Add suffix of 0 for 6", 1 for 12", 2 for 24" or 3 for 36" long leads; please allow 4 to 6 weeks for delivery