



15A | Watertight

Wetguard® Watertight Straight Blade Plugs, Connectors, Inlets, Outlets and Receptacles

Features and Benefits

- Corrosion-resistant electroless nickel-coated brass blades, contacts, terminal screws and wiring clamps, and stainless steel assembly screws make these devices ideal for use in wet and corrosive environments
- EPTR rubber part provides outstanding resistance to wet and damp environments, extreme temperature variations, water, acids, alkalis, grease, oils and many automotive and industrial lubricants and solvents
- Plug and connector husk is molded to a bondable nylon body, providing a device that withstands physical abuse
- Interlocking "tongue and groove" construction seals out water, moisture and dirt when plugs are mated with connectors
- · Multi-point sealing system utilizes nut, strain relief washer and rubber bushing to form a watertight cord grip seal
- Non-magnetic stainless steel fast-threading assembly screws won't interfere with sensitive equipment
- Connector "hood" closure cap seals device when not in use
- Most devices also available in black. Check for availability
- Devices are UL and CSA listed and have enclosure ratings of NEMA 4, 4X, 12 and IEC IP66, IP67 when mated or with cover closed
- Backed by a lifetime warranty

Wetguard® Straight Blade Plugs, Connectors, Inlets, Outlets and Receptacles

		4 4111								
15A Wetguard® Straight Blade Devices										
Rating		15A-125V	15A-125V	15A-250V	15A-277V	15A-347V				
Configuration		2P 2W	2P 3W	2P 3W	2P 3W	2P 3W				
NEMA				Q G		G G G G G G G G G G G G G G G G G G G				
		1-15	5-15	6-15	7-15	24-15				
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.	Cat. No.				
Plug	Yellow	14W04	14W47*	14W49	14W34	14W15				
Plug Cap]	14W*	14W*	14W*	14W*	_				
Connector]	15W04	15W47*	15W49	15W34	15W16				
Connector Cap	1	50W50*	50W50*	50W50*	50W50*	50W50*				
Single Outlet]	90W04-S	90W47-S	90W49-S	_	_				
Duplex Outlet]	80W04-D	80W47-D	80W49-D	_	_				
Single Inlet]	59W04	59W47	59W49	_	_				
Connector for Single Inlet	1	79W04-C	79W47-C	79W49-C	_	_				
Single Receptacle	1	_	5261-CR	5661-CR	_	_				
Receptacle Cover w/Gasket]	_	60W03*	60W03*	_	_				



^{*}Available in black. To order, add "-B" suffix to catalog number



15W47



79W04-C





Related Products

See section H for more information on the entire line of watertight wiring devices.



15/10A AND 20A | Watertight

15/10A and 20A Wetguard® Straight Blade Devices									
Rating		15A-125V 10A-250V	15A-125V	15A-250V	15A-277V				
Configuration		3P 3W	2P 3W	2P 3W	2P 3W				
NEMA					G G				
		Non-NEMA	5-20	6-20	24-20				
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.				
Plug	Yellow	14W07	14W33*	14W48	14W17				
Plug Cap]	14W*	14W*	14W*	14W*				
Connector]	15W07	15W33	15W48	15W18				
Connector Cap		50W50*	50W50*	50W50*	50W50*				
Single Outlet		90W07-S	90W33-S	90W48-S	_				
Duplex Outlet		80W07-D	_	_	_				
Single Inlet		59W07	59W33	59W48	_				
Connector for Single Inlet		79W07-C	79W33-C	79W48-C	_				
Single Receptacle	1	_	5361-CR	5461-CR	_				
Receptacle Cover w/Gasket		_	60W03*	60W03*	_				



14W07

14W



90W48

SPOTLIGHT

Wetguard® Watertight

The Wetguard® line consists of a comprehensive array of plugs, connectors, inlets, outlets, covers and an industry exclusive FD Box system that allows mounting of single-gang devices in multi-gang configurations. Visit www.leviton.com/wetguard for more information.



 $[\]label{lem:nematic} \mbox{NEMA configuration diagrams represent plug blade configuration}.$

^{*}Available in black. To order, add "-B" suffix to catalog number

15A | Watertight



Wetguard® Watertight Locking Plugs, Connectors, Inlets, **Outlets and Receptacles**

Features and Benefits

- Corrosion-resistant electroless nickel-coated brass blades, contacts, terminal screws and wiring clamps, and stainless steel assembly screws make these devices ideal for use in wet and corrosive environments
- EPTR rubber part provides outstanding resistance to wet and damp environments, extreme temperature variations, water, acids, alkalis, grease, oils and many automotive and industrial lubricants and solvents
- Plug and connector husk is molded to a bondable nylon body, providing a device that withstands physical abuse
- Interlocking "tongue and groove" construction seals out water, moisture and dirt when plugs are mated with connectors
- · Multi-point sealing system utilizes nut, strain relief washer and rubber bushing to form a watertight cord grip seal
- Non-magnetic stainless steel fast-threading assembly screws won't interfere with sensitive equipment
- Connector "hood" closure cap seals device when not in use
- Most devices also available in black. Check for availability
- Devices are UL and CSA listed and have enclosure ratings of NEMA 4, 4X, 12 and IEC IP66, IP67 when mated or with cover closed
- Backed by a lifetime warranty

Wetguard® Locking Plugs, Connectors, Inlets, Outlets and Receptacles

15A Wetguard® Locking Devices									
Rating		15A-125V	15A-125V	15A-250V	15A-277V				
Configuration	2P 2W	2P 3W	2P 3W	2P 3W					
NEMA									
		L1-15	L5-15	L6-15	L7-15				
Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.				
Plug	Yellow	24W04	24W47*	24W49	24W34				
Plug Cap	1	14W*	14W*	14W*	14W*				
Connector	1	25W04	25W47*	25W49	25W34				
Connector Cap		50W50*	50W50*	50W50*	50W50*				
Single Outlet		95W04-S	95W47-S	95W49-S	95W34-S				
Duplex Outlet	1	85W04-D	85W47-D	85W49-D	85W34-D				
Single Inlet	1	64W04	64W47	64W49	64W34				
Connector for Single Inlet]	74W04-C	74W47-C	74W49-C	74W34-C				
Single Receptacle	1	_	47CM-10	45CM-60	47CM-60				
Receptacle Cover w/Gasket]	_	60W03*	60W03*	60W03*				



24W04



50W50

SPOTLIGHT

Wetguard® Watertight Wiring Devices

The Wetguard® line consists of a comprehensive array of plugs, connectors, inlets, outlets, covers and an industry exclusive FD Box system that allows mounting of single-gang devices in multi-gang configurations. Visit www.leviton.com/wetguard for more information.



NEMA configuration diagrams represent plug blade configuration. *Available in black. To order, add "-B" suffix to catalog number



WETGUARD® STRAIGHT BLADE DEVICES | 15A | 15/10A and 20A

Straight Blade Devices — 15A

15A	15A Wetguard® Straight Blade Devices											
				Cat. No.								
Amp	Volt	NEMA Configuration	Plug	Plug Cap	Connector	Connector Cap	Single Outlet	Duplex Outlet	Single Inlet	Connector for Single Inlet	Single Receptacle	Receptacle Cover w/Gasket
2-Pole	e, 2-Wi	re										
15	125	1-15	14W04	14W*	15W04	50W50*	90W04-S	80W04-D	59W04	79W04-C	_	_
2-Pole	e, 3-Wi	re										
15	125	5-15	14W47*	14W*	15W47*	50W50*	90W47-S	80W47-D	59W47	79W47-C	5261-CR	60W03*
15	250	6-15 •••	14W49	14W*	15W49	50W50*	90W49-S	80W49-D	59W49	79W49-C	5661-CR	60W03*
15	277	7-15	14W34	14W*	15W34	50W50*	_	_	_	_	_	_
15	347	24-15	14W15	-	15W16	50W50*	_	_	_	_	_	_

NEMA configuration diagrams represent plug blade configuration. *Available in black. To order, add "-B" suffix to catalog number

Straight Blade Devices — 15A and 20A

15/1	15/10A and 20A Wetguard® Straight Blade Devices											
				Cat. No.								
Amp	Volt	NEMA Configuration	Plug	Plug Cap	Connector	Connector Cap	Single Outlet	Duplex Outlet	Single Inlet	Connector for Single Inlet	Single Receptacle	Receptacle Cover w/Gasket
3-Pole	e, 3-Wi	re										
15 10	125 250	Non- NEMA	14W07	14W*	15W07	50W50*	90W07-S	80W0 7 -D	59W07	79W07-C	_	_
2-Pole	e, 3-Wi	re										
20	125	5-20	14W33*	14W*	15W33	50W50*	90W33-S	_	59W33	79W33-C	5361-CR	60W03*
20	250	6-20	14W48	14W*	15W48	50W50*	90W48-S	_	59W48	79W48-C	5461-CR	60W03*
20	347	24-20	14W17	14W*	15W18	50W50*	_	_	_	_	_	_

NEMA configuration diagrams represent plug blade configuration.

SPOTLIGHT

Wetguard® Watertight

The Wetguard® line consists of a comprehensive array of plugs, connectors, inlets, outlets, covers and an industry exclusive FD Box system that allows mounting of single-gang devices in multi-gang configurations. Visit www.leviton.com/wetguard for more information.



^{*}Available in black. To order, add "-B" suffix to catalog number



WETGUARD® STRAIGHT BLADE DEVICES

Locking Plugs, Connectors, Inlets, Outlets and Receptacles

Product Overview

Features and Benefits

- Corrosion-resistant electroless nickel-coated brass blades, contacts, terminal screws and wiring clamps, and stainless steel assembly screws make these devices ideal for use in wet and corrosive environments
- EPTR rubber part provides outstanding resistance to wet and damp environments, extreme temperature variations, water, acids, alkalis, grease, oils and many automotive and industrial lubricants and solvents
- · Plug and connector husk is molded to a bondable nylon body, providing a device that withstands physical abuse
- Interlocking "tongue and groove" construction seals out water, moisture and dirt when plugs are mated with connectors
- Multi-point sealing system utilizes nut, strain relief washer and rubber bushing to form a watertight cord grip seal
- Non-magnetic stainless steel fast-threading assembly screws won't interfere with sensitive equipment
- Connector "hood" closure cap seals device when not in use
- Most devices also available in black. Check for availability
- Devices are UL and CSA listed and have enclosure ratings of NEMA 4, 4X, 12 and IEC IP66, IP67 when mated or with cover closed
- Backed by a lifetime warranty

Wetguard® Watertight Locking Devices



Plug



Plug Cap



Connector



Connector Cap



Single Outlet



Duplex Outlet



Single Inlet



Connector Mates w/Inlet



Single Receptacle




Receptacle Cover



WETGUARD® LOCKING DEVICES | 15A | 15/10A and 20A

Locking Devices — 15A

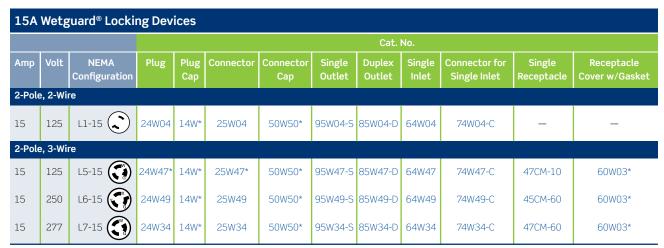

NEMA configuration diagrams represent plug blade configuration. *Available in black. To order, add "-B" suffix to catalog number

Locking Devices — 15/10A and 20A

15/1	15/10A and 20A Wetguard® Locking Devices											
				Cat. No.								
Amp	Volt	NEMA Configuration	Plug	Plug Cap	Connector	Connector Cap	Single Outlet	Duplex Outlet	Single Inlet	Connector for Single Inlet	Single Receptacle	Receptacle Cover w/Gasket
3-Pole	3-Pole, 3-Wire											
15 10	125 250	Non- NEMA	24W07	14W*	25W07	50W50*	95W07-S	85W07-D	64W07	74W07-C	-	_
2-Pole	2-Pole, 2-Wire											
20	250	L2-20 (26W07	26W*	27W07	50W50*	97W07-S	87W07-D	66W07	76W07-C	_	_

NEMA configuration diagrams represent plug blade configuration.

SPOTLIGHT

Wetguard® Watertight

The Wetguard® line consists of a comprehensive array of plugs, connectors, inlets, outlets, covers and an industry exclusive FD Box system that allows mounting of single-gang devices in multi-gang configurations. Visit www.leviton.com/wetguard for more information.



^{*}Available in black. To order, add "-B" suffix to catalog number



WETGUARD® INDIVIDUAL COVERS

Switch Cover, Plate and Replacement Covers

Switch Co	vers, Plate	and Replacement Covers
Cat. No.	Color	Description
COVER-S	Yellow	Single Gang Switch Cover and Gasket for any 15A-40A Toggle Switch, including Leviton
COVER-GS	Gray	Manual Motor Starters
WTCVD*	Yellow	Wetguard® Replacement Cover and Gasket for Wetguard® Duplex Outlets Only
WTCVS-15	Yellow	Wetguard® Replacement Cover and Gasket for 15A and 20A Straight and 15A
		Locking Single Inlets and Outlets
WTCVS-20	Yellow	Wetguard® Replacement Cover and Gasket for all 20A Locking Single Inlets and Outlets
WTCVS-30	Yellow	Wetguard® Replacement Cover and Gasket for all 30A Locking Single Inlets and Outlets
WP459	Yellow	Wetguard® Blank Plate and Gasket
60W03	Yellow	Wetguard® Cover and Gasket for 15A and 20A Straight Blade and 15A
		Locking Box Mount Single Flush Receptacles
60W04	Yellow	Wetguard® Cover and Gasket for 20A Locking Box Mount Single Flush Receptacles
60W05	Yellow	Wetguard® Cover and Gasket for 30A Locking Box Mount Single Flush Receptacles

^{*}Not for use with standard duplex devices







WTCVS-15



60W03



WP459



WTCVD

SPOTLIGHT

Wetguard® Watertight

The Wetguard® line consists of a comprehensive array of plugs, connectors, inlets, outlets, covers and an industry exclusive FD Box system that allows mounting of single-gang devices in multi-gang configurations. Visit www.leviton.com/wetguard for more information.

