


NEMA

NEMA Locking Devices


Locking Devices for the Entire Spectrum of Industrial Applications

Leviton's industrial grade locking devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of locking devices of unmatched flexibility and dependability.

Exposed Connector

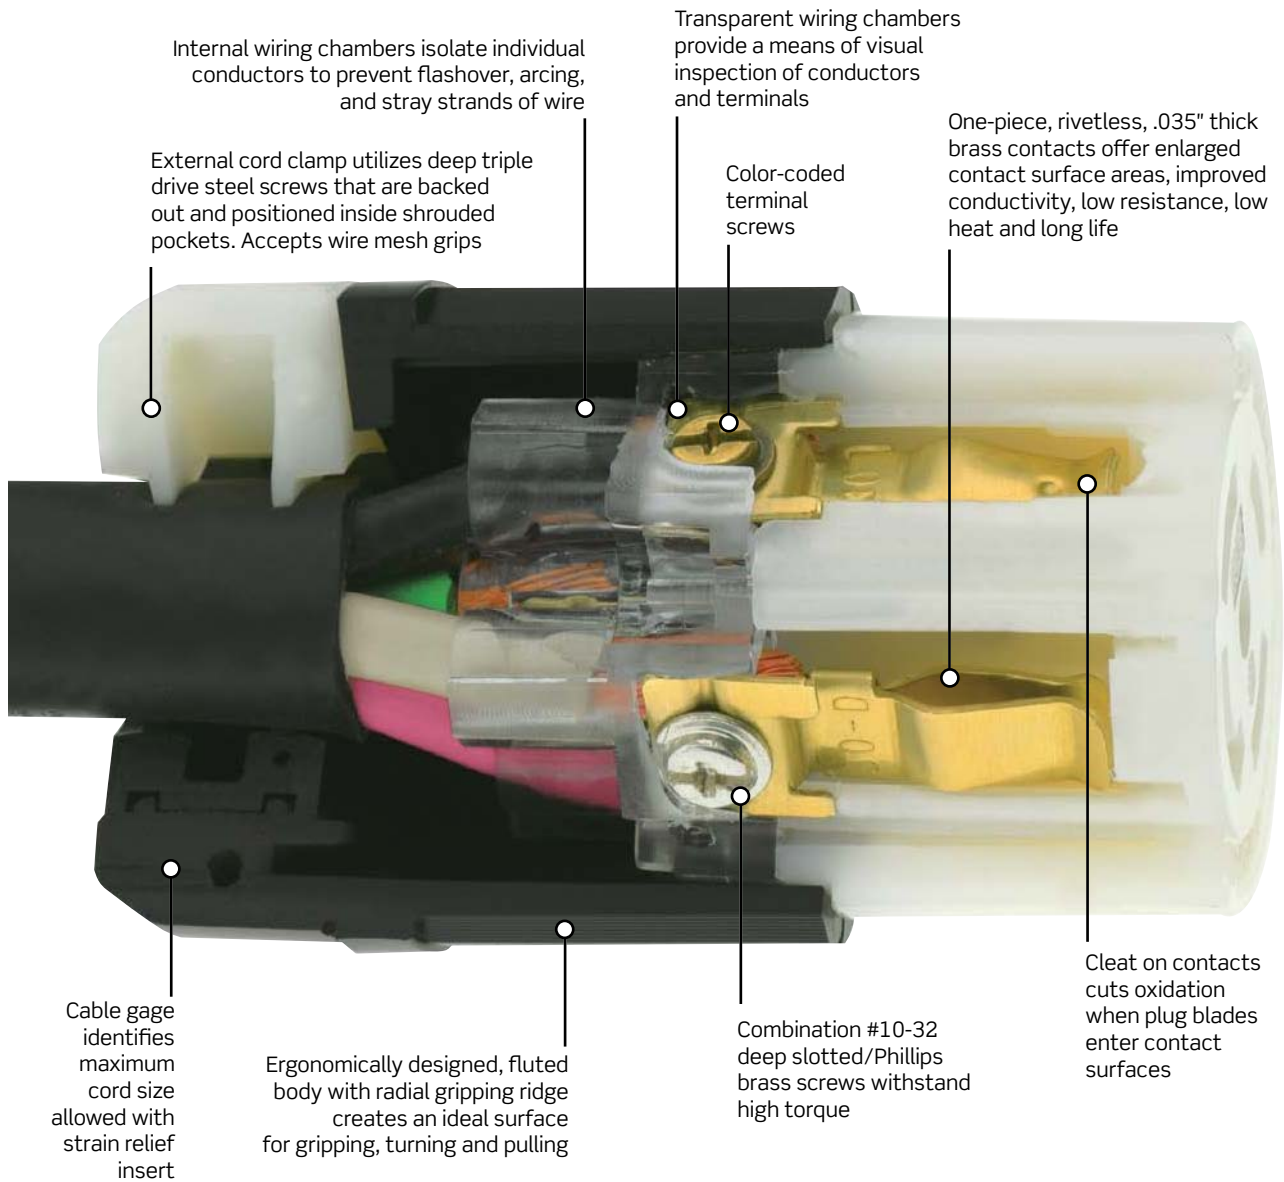

Exposed Plug

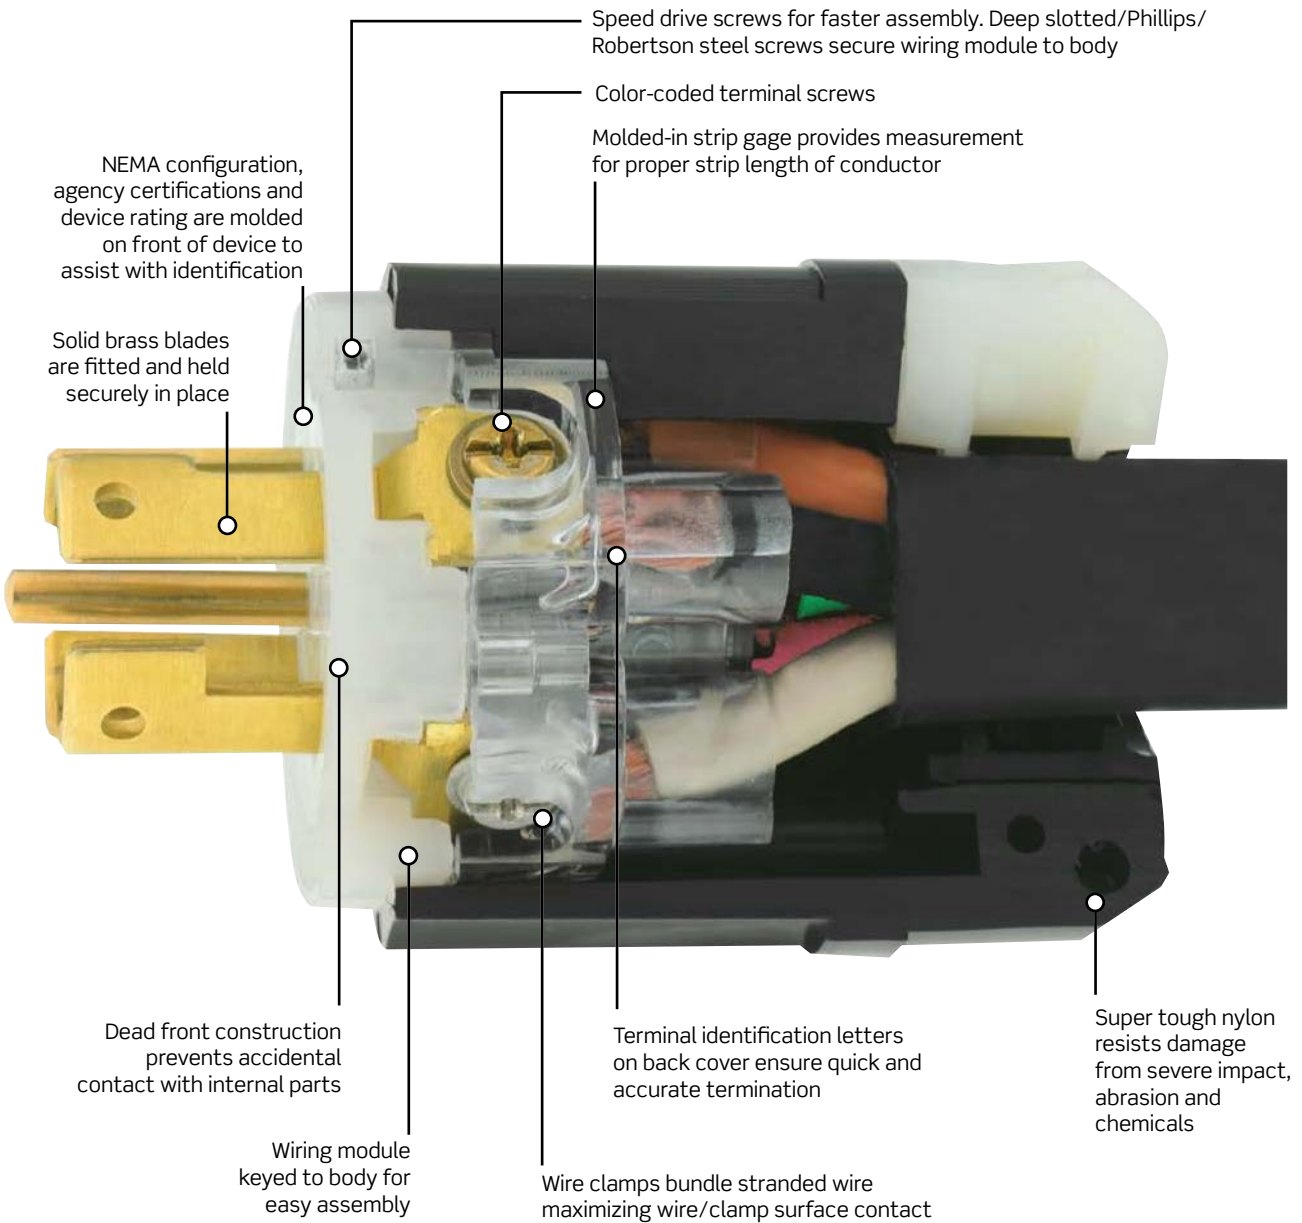

Shrouded pockets in cord clamp prevents slippage of screwdriver blade when tightening clamp screws.



Wire clamps move within individual chambers to provide positive clamp lock without cutting wire strands.



Captive terminal screws eliminate nuisance dropping and searching for missing screws.



Deep-funnelled, large wire wells guide conductors into termination position.


NEMA

Locking Flush Receptacles


Engineered for maximum performance with a UL 94 V-0 flammability rating.



Sample Receptacles

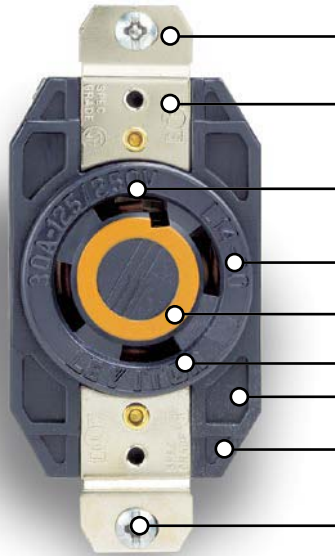

- Extra thick .050" nickel-plated brass mounting strap
- Stamped-in agency certifications
- Molded-in amperage and voltage rating
- NEMA configuration
- Color-coded voltage rating
- Manufacturer
- Stability ribs
- Uni-body face
- Triple combination head mounting screws

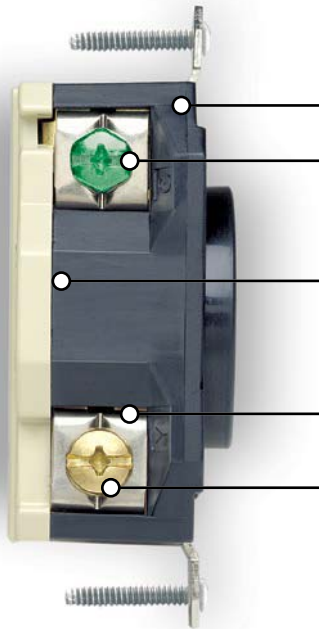

- Molded-in terminal identification letters
- Triple combination mounting screws, multi-terminated design, accepts #8 to #14 solid or stranded conductors
- Seam between front cover and back cover is far from contact working area
- External nickel plated clamps accept #8 to #14 solid or stranded conductors for back and side wiring
- Oversized #10 brass Phillips/Robertson/straight slot drive terminal screw





Color-Coded Voltage Ratings

| | | |
|----------|--------|--------|
| | | |
| 125V | 250V | 277VAC |
| | | |
| 125/250V | 3ø250V | 3ø480V |
| | | |
| | 600V | |

One-piece .040" thick brass, high-copper content contacts with nickel-plated clamp type terminals

Contacts deeply seated in thick walled faced



Mechanically-secured all-brass ground path

30A-125/250V and 3Ø 250V

| 3-Pole, 3-Wire Non-Grounding | | | | | |
|------------------------------|--------------|------------------|--------------|------------------|--|
| Rating | 30A-125/250V | | 30A-3Ø 250V | | |
| NEMA | | | | | |
| | L10-30P | L10-30R | L11-30P | L11-30R | |
| Description | Cat. No. | Cat. No. | Cat. No. | Cat. No. | |
| Plugs and Connectors | Plug | Connector | Plug | Connector | |
| Black & White® Nylon Body | 2661 | 2663 | 2671 | 2673 | |
| Inlets and Outlets | Inlet | Outlet | Inlet | Outlet | |
| Flanged Device | 2665 | 2666 | 2675 | 2676 | |
| Receptacles | | | | | |
| V-O-Max® Single | — | 2660 | — | 2670 | |
| Flush Receptacle | | | | | |



2671



2676

30A-3Ø 480VAC and 3Ø 600VAC

| 3-Pole, 3-Wire Non-Grounding | | | | | |
|------------------------------|---------------|------------------|---------------|------------------|--|
| Rating | 30A-3Ø 480VAC | | 30A-3Ø 600VAC | | |
| NEMA | | | | | |
| | L12-30P | L12-30R | L13-30P | L13-30R | |
| Description | Cat. No. | Cat. No. | Cat. No. | Cat. No. | |
| Plugs and Connectors | Plug | Connector | Plug | Connector | |
| Black & White® Nylon Body | 2681 | 2683 | 2691 | 2693 | |
| Inlets and Outlets | Inlet | Outlet | Inlet | Outlet | |
| Flanged Device | 2685 | 2686 | 2695 | 2696 | |
| Receptacles | | | | | |
| V-O-Max® Single Flush | — | 2680 | — | 2690 | |
| Receptacle | | | | | |

SPOTLIGHT
Industrial Devices

For over 107 years, Leviton has been helping businesses power their equipment safely, reliably, and efficiently. The Leviton line of rugged industrial electrical products comprises devices rated up to 1100A at 1000V, and includes devices with watertight and dust-tight ratings. For more information on Industrial devices visit us online at www.leviton.com/industrial

