


NEMA Locking Devices

Locking Devices for the Entire Spectrum of Industrial Applications

Leviton's industrial grade locking devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of locking devices of unmatched flexibility and dependability.

Exposed Connector

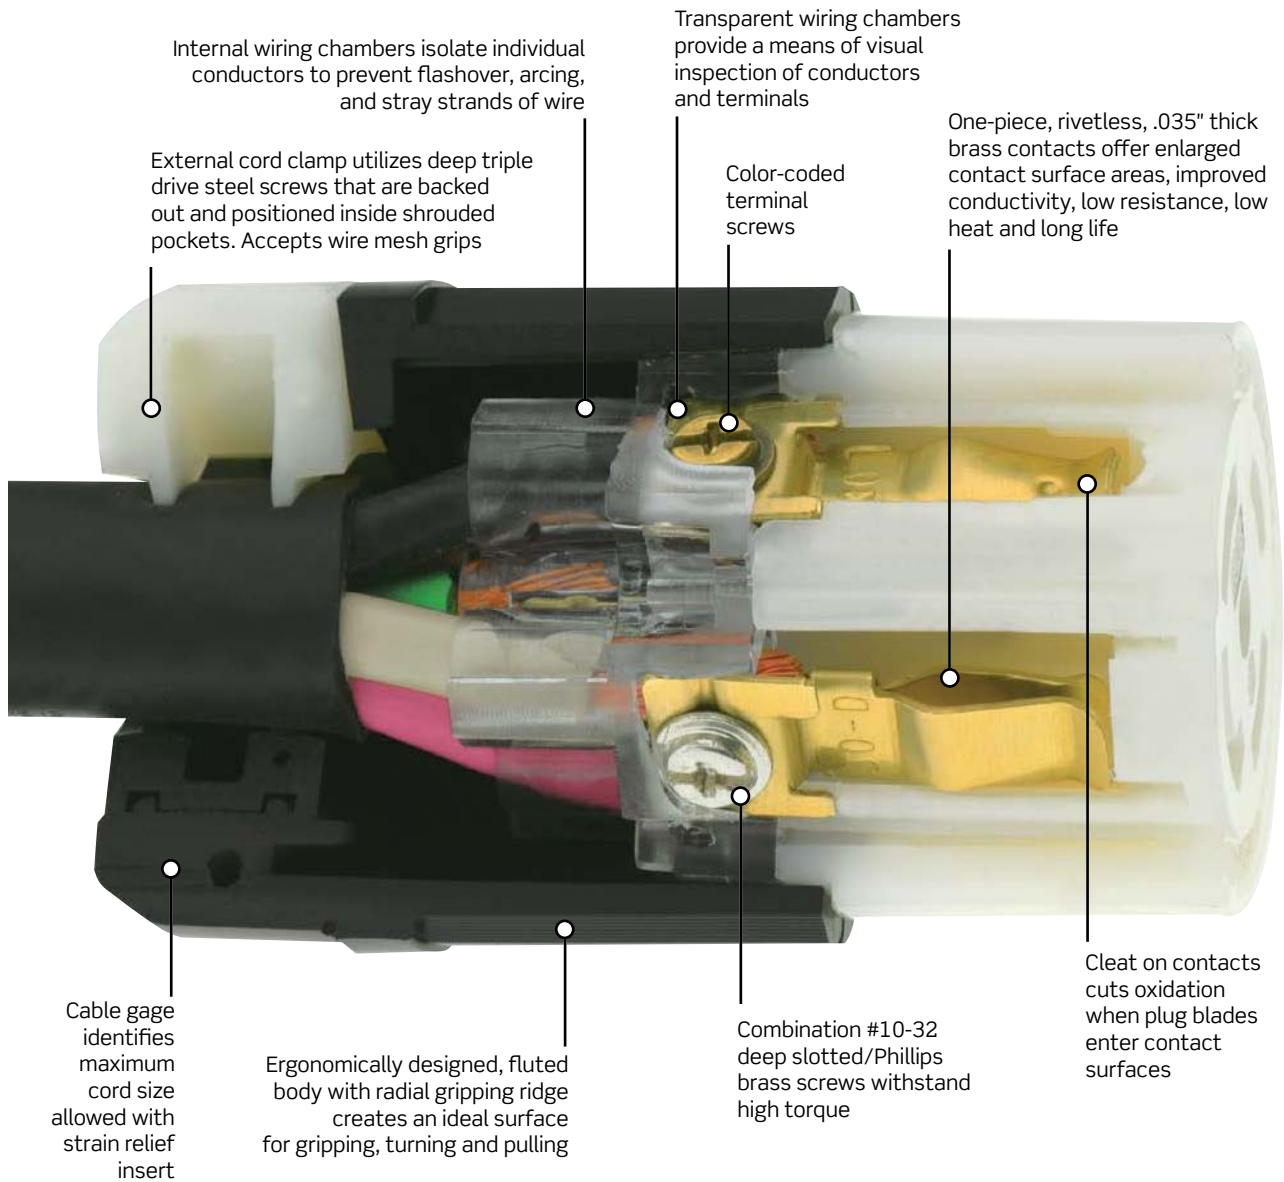

Internal wiring chambers isolate individual conductors to prevent flashover, arcing, and stray strands of wire

Transparent wiring chambers provide a means of visual inspection of conductors and terminals

One-piece, rivetless, .035" thick brass contacts offer enlarged contact surface areas, improved conductivity, low resistance, low heat and long life

External cord clamp utilizes deep triple drive steel screws that are backed out and positioned inside shrouded pockets. Accepts wire mesh grips

Color-coded terminal screws


Cable gage identifies maximum cord size allowed with strain relief insert

Ergonomically designed, fluted body with radial gripping ridge creates an ideal surface for gripping, turning and pulling

Combination #10-32 deep slotted/Phillips brass screws withstand high torque

Cleat on contacts cuts oxidation when plug blades enter contact surfaces

Exposed Plug

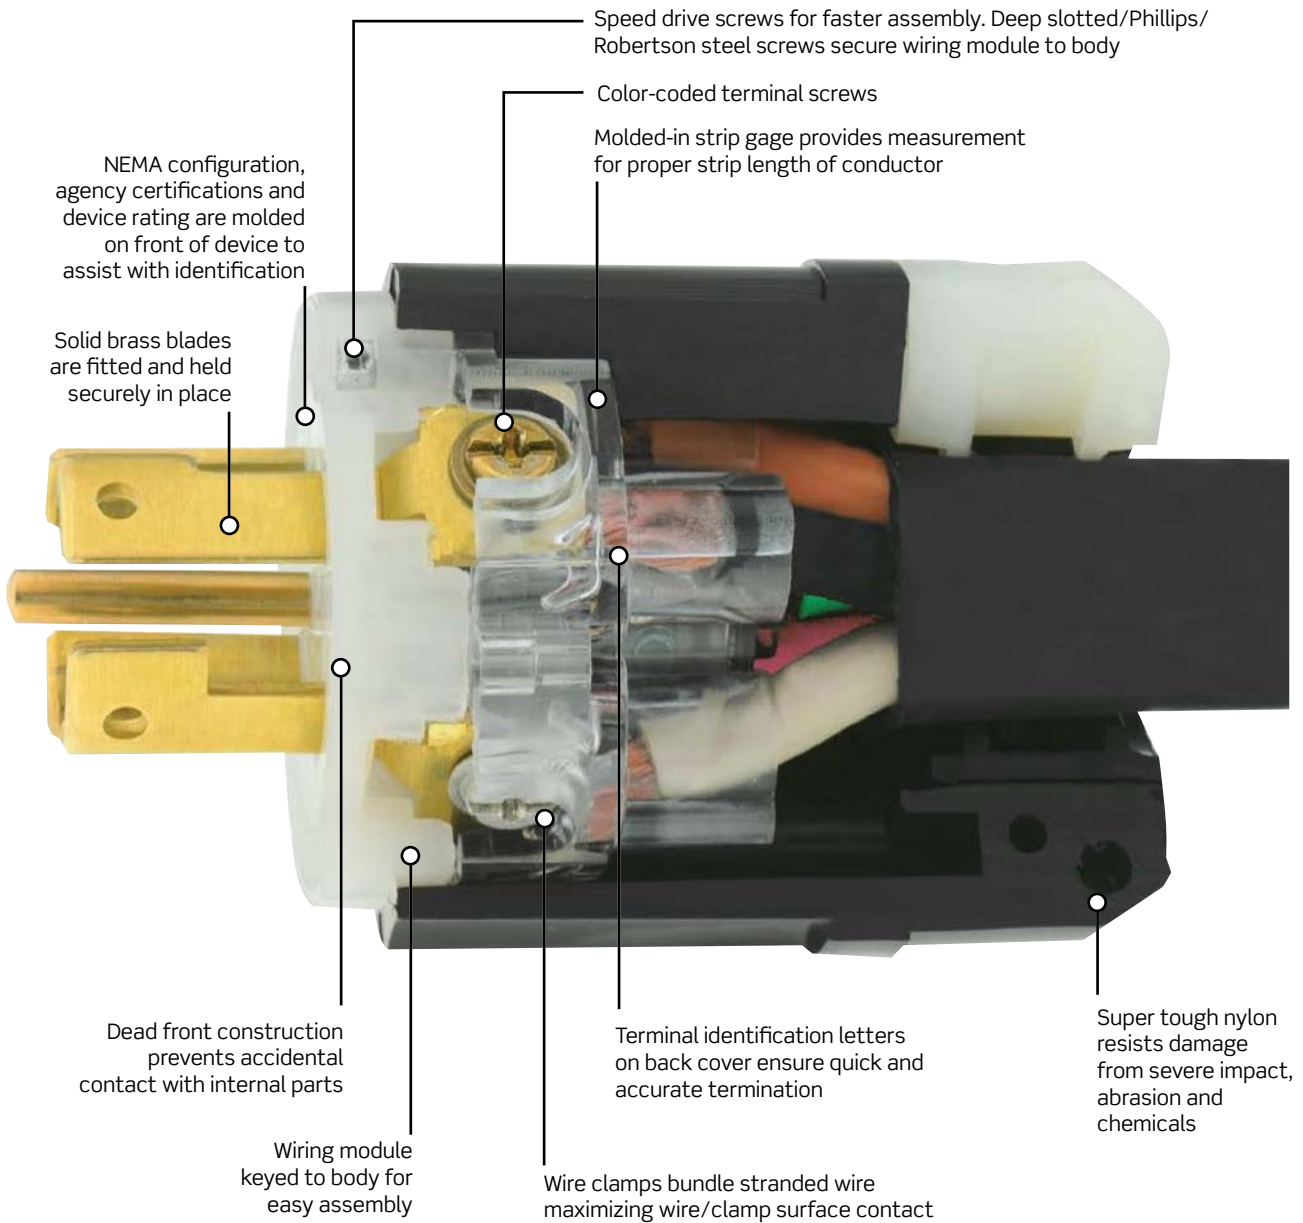

Shrouded pockets in cord clamp prevents slippage of screwdriver blade when tightening clamp screws.



Wire clamps move within individual chambers to provide positive clamp lock without cutting wire strands.



Captive terminal screws eliminate nuisance dropping and searching for missing screws.



Deep-funnelled, large wire wells guide conductors into termination position.


NEMA

Locking Flush Receptacles


Engineered for maximum performance with a UL 94 V-0 flammability rating.



Sample Receptacles

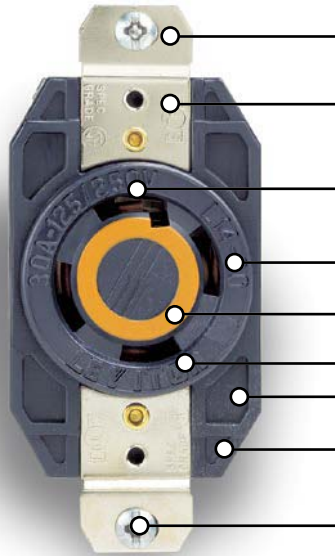

- Extra thick .050" nickel-plated brass mounting strap
- Stamped-in agency certifications
- Molded-in amperage and voltage rating
- NEMA configuration
- Color-coded voltage rating
- Manufacturer
- Stability ribs
- Uni-body face
- Triple combination head mounting screws

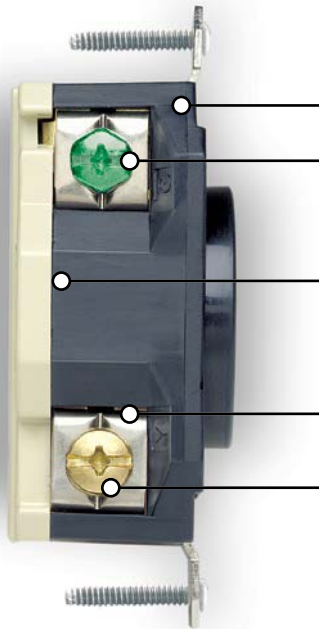

- Molded-in terminal identification letters
- Triple combination mounting screws, multi-terminated design, accepts #8 to #14 solid or stranded conductors
- Seam between front cover and back cover is far from contact working area
- External nickel plated clamps accept #8 to #14 solid or stranded conductors for back and side wiring
- Oversized #10 brass Phillips/Robertson/straight slot drive terminal screw





Color-Coded Voltage Ratings

125V	250V	277VAC
125/250V	3ø250V	3ø480V
		600V

One-piece .040" thick brass, high-copper content contacts with nickel-plated clamp type terminals

Contacts deeply seated in thick walled faced



Mechanically-secured all-brass ground path

Locking Power Interrupting Devices
Non-NEMA 20A-125V

2-Pole, 3-Wire Grounding		
Rating	20A-125V	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug HOSPITAL USE ONLY	23004-HG*	—
Locking Connector HOSPITAL USE ONLY	—	23001-HG*
Single Flush Receptacle with Thermoset Body	—	23000-HG*
Locking Plug	23034-A**	—
Locking Connector	—	23031-A**
Single Flush Receptacle	—	23030**

*UL and CSA listed.
 UL for "Hospital Use Only" applications in non-hazardous locations.
 **Also rated at 10A for 250VDC and 480VAC



23000-HG



23004-HG

Non-NEMA 30A-600VAC/20A-250VDC

3-Pole, 4-Wire Grounding		
Rating	30A-600VAC/20A-250VDC	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug	21415-B	—
Locking Connector	—	21414-B
Single Flush Receptacle	—	20403

4-Pole, 5-Wire Grounding		
Rating	30A-600VAC/20A-250VDC	
Non-NEMA		
Description	Cat. No.	Cat. No.
Locking Plug	25415-B	—
Locking Connector	—	25414-B
Single Flush Receptacle	—	25403