LEVITON

NEMA




NEMA Locking Devices

Locking Devices for the Entire Spectrum of Industrial Applications

Leviton's industrial grade locking devices are built to provide unparalleled quality and superior performance in the most severe industrial settings. Leviton combines the best materials available with superior production standards to produce a broad selection of locking devices of unmatched flexibility and dependability.


Exposed Connector

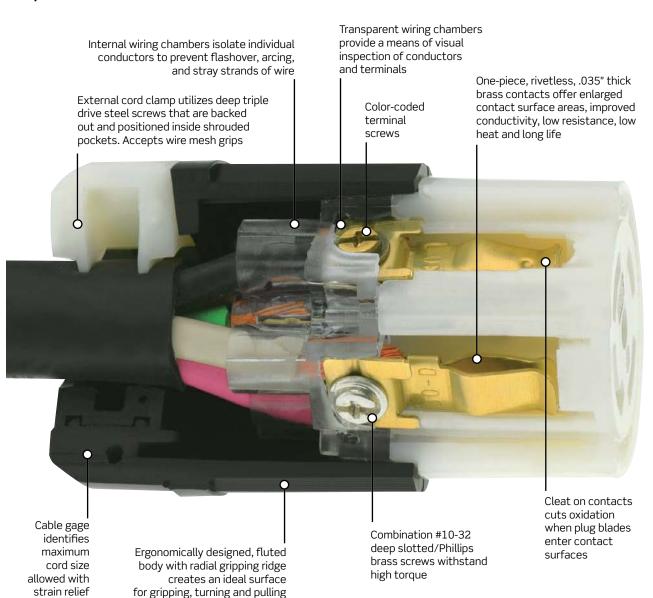

insert



NEMA

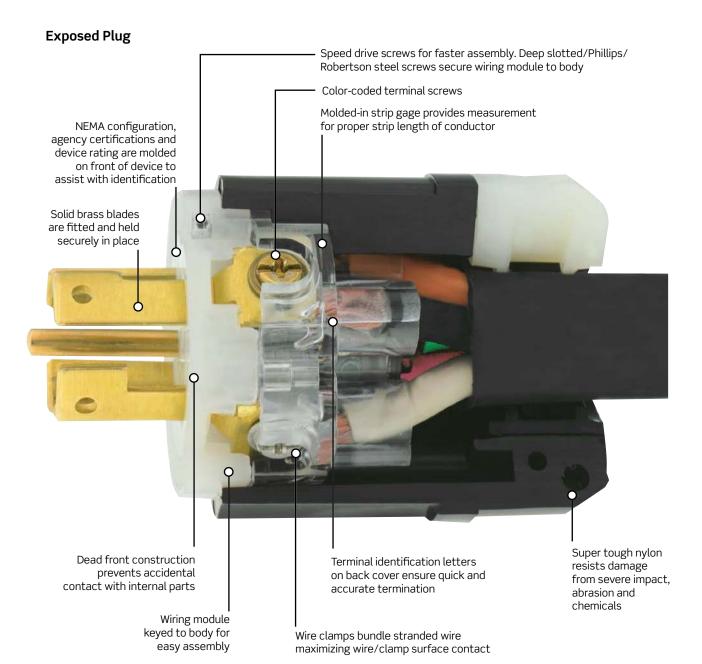



Shrouded pockets in cord clamp prevents slippage of screwdriver blade when tightening clamp screws.



Wire clamps move within individual chambers to provide positive clamp lock without cutting wire strands.



Captive terminal screws eliminate nuisance dropping and searching for missing screws.



Deep-funnelled, large wire wells guide conductors into termination position.

LEVITON

NEMA



Locking Flush Receptacles

Engineered for maximum performance with a UL 94 V-O flammability rating.



Sample Receptacles



Extra thick .050" nickel-plated brass mounting strap

Stamped-in agency certifications

Molded-in amperage and voltage rating

NEMA configuration


Color-coded voltage rating

Manufacturer

Stability ribs

Uni-body face

Triple combination head mounting screws



Molded-in terminal identification letters


Triple combination mounting screws, multiterminated design, accepts #8 to #14 solid or stranded conductors

Seam between front cover and back cover is far from contact working area

External nickel plated clamps accept #8 to #14 solid or stranded conductors for back and side wiring

Oversized #10 brass Phillips/Robertson/ straight slot drive terminal screw





One-piece .040" thick brass, high-copper content contacts with nickel-plated clamp type terminals

> Contacts deeply seated in thick walled faced





LEVITON

15A | Watertight



Wetguard® Watertight Locking Plugs, Connectors, Inlets, Outlets and Receptacles

Features and Benefits

- Corrosion-resistant electroless nickel-coated brass blades, contacts, terminal screws and wiring clamps, and stainless steel assembly screws make these devices ideal for use in wet and corrosive environments
- EPTR rubber part provides outstanding resistance to wet and damp environments, extreme temperature variations, water, acids, alkalis, grease, oils and many automotive and industrial lubricants and solvents
- Plug and connector husk is molded to a bondable nylon body, providing a device that withstands physical abuse
- Interlocking "tongue and groove" construction seals out water, moisture and dirt when plugs are mated with connectors
- · Multi-point sealing system utilizes nut, strain relief washer and rubber bushing to form a watertight cord grip seal
- Non-magnetic stainless steel fast-threading assembly screws won't interfere with sensitive equipment
- Connector "hood" closure cap seals device when not in use
- Most devices also available in black. Check for availability
- Devices are UL and CSA listed and have enclosure ratings of NEMA 4, 4X, 12 and IEC IP66, IP67 when mated or with cover closed
- Backed by a lifetime warranty

Wetguard® Locking Plugs, Connectors, Inlets, Outlets and Receptacles

15A Wetguard® Locking Devices					
Rating		15A-125V	15A-125V	15A-250V	15A-277V
Configuration		2P 2W	2P 3W	2P 3W	2P 3W
NEMA					
Description	Color	L1-15	L5-15 Cat. No.	L6-15 Cat. No.	L7-15 Cat. No.
Plug	Yellow	24W04	24W47*	24W49	24W34
Plug Cap		14W*	14W*	14W*	14W*
Connector		25W04	25W47*	25W49	25W34
Connector Cap		50W50*	50W50*	50W50*	50W50*
Single Outlet		95W04-S	95W47-S	95W49-S	95W34-S
Duplex Outlet		85W04-D	85W47-D	85W49-D	85W34-D
Single Inlet		64W04	64W47	64W49	64W34
Connector for Single Inlet		74W04-C	74W47-C	74W49-C	74W34-C
Single Receptacle		_	47CM-10	45CM-60	47CM-60
Receptacle Cover w/Gasket		_	60W03*	60W03*	60W03*



24W04



50W50

SPOTLIGHT

Wetguard® Watertight Wiring Devices

The Wetguard® line consists of a comprehensive array of plugs, connectors, inlets, outlets, covers and an industry exclusive FD Box system that allows mounting of single-gang devices in multi-gang configurations.

Visit www.leviton.com/wetguard for more information.



NEMA configuration diagrams represent plug blade configuration. *Available in black. To order, add "-B" suffix to catalog number