

**INTERNATIONAL RATED** | 16A, 32A, 63A and 125A Splashproof


Continued from previous page

**Splashproof (IP44) Devices**

Splashproof (IP44) International Rated Devices											
Amps	Poles	Hz	Volts	Connector/ Outlet Config. and Clock Position	Plug/ Inlet Config.	Plug	Connector	Panel Mounting Socket Outlet	Surface Mounting Socket Outlet	Panel Mounting Inlet	Back Box
32	2P+E (2P, 3W)	50/60Hz	100V-130V	4		S232-P4	S232-C4	S232-R4	S232-S4	S232-B4	BB32-A
			200V-250V	6		S232-P6	S232-C6	S232-R6	S232-S6	S232-B6	BB32-A
			380V-415V	9		S232-P9	S232-C9	S232-R9	S232-S9	S232-B9	BB32-A
	3P+E (3P, 4W)	50/60Hz	200V-250V	9		S332-P9	S332-C9	S332-R9	S332-S9	S332-B9	BB32-A
			380V-415V	6		S332-P6	S332-C6	S332-R6	S332-S6	S332-B6	BB32-A
			60Hz	440V-460V	11		S332-P11	S332-C11	S332-R11	S332-S11	S332-B11
	3P+N+E (4P, 5W)	50/60Hz	208V-250V	9		S432-P9	S432-C9	S432-R9	S432-S9	S432-B9	BB32-A
			346V-415V	6		S432-P6	S432-C6	S432-R6	S432-S6	S432-B6	BB32-A
			60Hz	440V-460V	11		S432-P11	S432-C11	S432-R11	S432-S11	S432-B11

**Dimensions for Splashproof EN/IEC 60309 Industrial Plugs & Sockets**

Plugs — Splashproof (IP44)

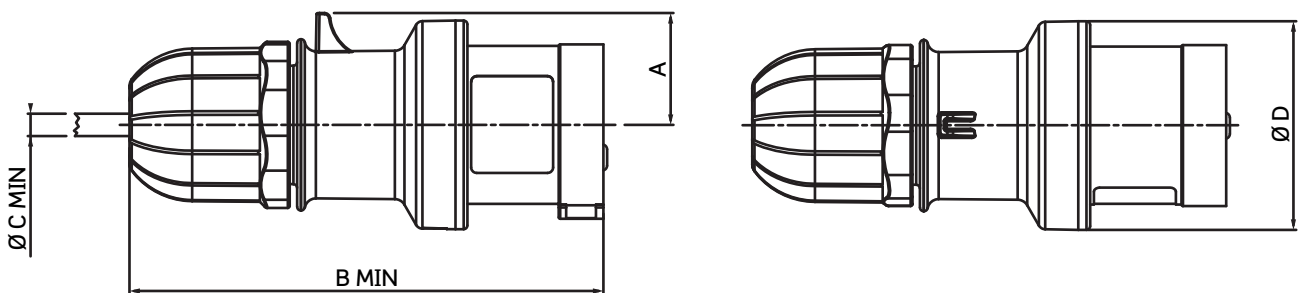

Amps	Poles	A mm(in)	B Min mm(in)	Ø C Min mm(in)	Ø D mm(in)
16A	2P+E (2P, 3W)	30(1.2)	128(5.0)	6(2)	56(2.2)
	3P+E (3P, 4W)	34(1.3)	135(5.3)	6(2)	60(2.4)
	3P+N+E (4P, 5W)	38(1.5)	153(6.0)	9(3)	65(2.6)
32A	2P+E (2P, 3W)	40(1.6)	162(6.4)	9(3)	65(2.6)
	3P+E (3P, 4W)	40(1.6)	162(6.4)	9(3)	65(2.6)
	3P+N+E (4P, 5W)	45(1.8)	176(6.9)	13(5)	73(2.9)