


Polycarbonate Insulated Fork Terminals



Technical Information

Material	Electrolytic copper
Plating	Tin plated
Marking	Wire size and bolt size stamped on the tongue
Metal barrel	Brazed seam to prevent barrel separation
Insulation	PC = Polycarbonate
Temperature resistance	+115°C / +125°C
Color coding of the insulation	According to the wire size
Cable insertion	Easy entry

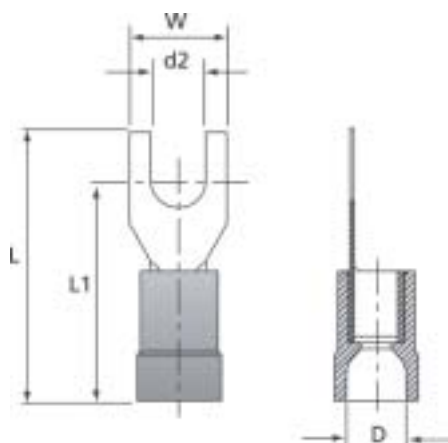

Ordering Information

Cat. No.	Wire Size Range (mm ²)	Color	Stud Hole Size d2	Dimensions				Wt. (g/100)	Qty. (pieces)	Crimping Tool
				W (mm)	L (mm)	D (mm)	L1 (mm)			
RZ3F	0.25 - 0.75	Green	M3	5.5	18.0	3.2	15.0	41	100	ERG2510
RZ4F	0.25 - 0.75	Green	M4	7.5	21.0	3.2	17.5	41	100	
RA35F	0.5 - 1.5	Red	M3.5	5.5	21.0	4.0	17.5	62	100	
RA4F	0.5 - 1.5	Red	M4	7.0	20.5	4.0	17.0	64	100	
RA5F	0.5 - 1.5	Red	M5	9.0	22.5	4.0	18.0	75	100	ERG2001A WT2124Y
RA6F	0.5 - 1.5	Red	M6	11.0	26.5	4.0	21.0	90	100	
RB3F	1.5 - 2.5	Blue	M3	5.5	19.0	4.5	16.0	72	100	
RB4F	1.5 - 2.5	Blue	M4	7.0	20.5	4.5	17.0	84	100	
RB5F	1.5 - 2.5	Blue	M5	9.0	22.5	4.5	18.0	96	100	
RB6F	1.5 - 2.5	Blue	M6	11.0	26.5	4.5	21.0	113	100	
RC4F	4.0 - 6.0	Yellow	M4	8.0	24.0	6.4	20.5	159	100	
RC5F	4.0 - 6.0	Yellow	M5	9.0	25.0	6.4	20.5	161	100	
RC6F	4.0 - 6.0	Yellow	M6	11.0	28.5	6.4	23.0	174	100	
RC8F	4.0 - 6.0	Yellow	M8	14.0	31.0	6.4	24.0	207	100	
RC10F	4.0 - 6.0	Yellow	M10	18.0	36.0	6.4	27.0	280	100	