






Accessories

Housing entry tubes with strain relief ties

- Highly elastic material allows passing of single wires
- Resistant to chemicals
- Weatherproof
- Simple and fast installation
- Supplied with a UV-resistant Ty-Rap® cable tie (see page 12 for cable tie specifications) for strong, secure and watertight strain-relief

Technical Information

Material - Housing	Neoprene
Material - Tie	Polyamide 6.6, UV-resistant
Temperature range	-30°C to +110°C for the housing -40°C to +85°C for the cable tie
Colour	Black (housing and tie)
Flammability rating	UL 514 (housing) UL 94 V-2 (cable tie)
Other properties	Halogen free, Silicone free

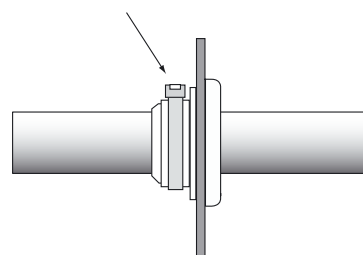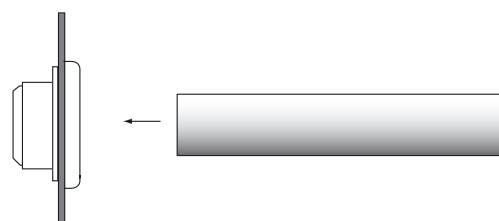

Ordering Information

PRODUCT REF.	DIMENSIONS				FOR CABLE Ø FROM ... TO [mm]	Ø OF HOLE IN PANEL [mm]	FOR PANEL THICKNESS UP TO [mm]	TYPE OF INCLUDED CABLE TIE	WEIGHT [g/100]	QUANTITY [pieces]
	A [mm]	B [mm]	D [mm]	E [mm]						
7401	18.6	24	13.6	5.0	4.0 - 9.0	16	2.2	TY24MX	420	10
7402	18.7	28	13.7	5.0	7.0 - 12.0	19	2.2	TY25MX	690	10
7403	22.0	34	17.0	5.0	12.0 - 18.0	25	2.2	TY25MX	1100	10
7404	24.0	43	19.0	5.0	18.0 - 25.0	32	2.2	TY25MX	1500	5
7405	24.5	51	18.5	6.0	25.0 - 32.0	38	2.2	TY25MX	1950	5