

## PM Cable Marking For PF Labels

- Transparent holder for cable marking with Partex marking labels, tapes and tags for series PF, PL, PP or PFC.
- Four lengths, three widths cover most cable marking demands.
- Fitting and fastening with Ty-Rap® cable ties. (recommend TY524MX)
- Marking labels can be printed on-site using WSG-NG-EXCL software WinSign and various marking equipment.
- The label is easily inserted into the holder providing fast installation and protection of the marking.



## Specifications

### Design

Holder for marker tags with punched holes for mounting with cable ties. Two standard lengths in two sizes 9 mm and 12 mm widths. Suitable marker labels and tags are PF on a A4 size sheet and tags on PFC X-cards in credit card formats. Also ProMark PP-profile tags and PL tapes can be used. The labels or tags are easily pushed into the holder and will be protected from dust, oil etc.

### Material

Cadmium and silicon free soft PVC according to special formula.

### Color

Transparent

### Temperature Range

Shape permanence from -30°C to + 60°C  
(-22°F to +140°F)

### Resistance

The product is tested according to Partex Product Test programme by the Swedish National Test and Research Institute and has the following test properties:

- Flammability resistance according to UL94-V0.
- Resistant to UV radiation, corresponding to 1 year outdoors in the south of Sweden.
- Resistance to chemicals meets Partex Product test Programme.
- Resistance to temperature and ageing meets norms of Partex Product Test Programme.

For application in hostile environments, please contact your Regional Sales Office for information.



## Marking methods

### Dimensions in mm (nominal)



Cat. No.	Length (L)	Width (B1)	Thickness (T)	Size of Holes (S)	Width (B2)
PM-10033AN	33	6	1.5	3	5
PM-20033AN		11.3	2.2		10
PM-24033AN		13.9	2.5		3.9
PM-20045AN	45	11.3	2.2	3	10
PM-20066AN	66				
PM-24066AN					
PM-24094	94	13.9	13.9	3.9	10
PM-20KNT	20M	11.3	2.2	-	-
PM-20QKNT				3	10
PM-24KNT		13.9	2.5	-	-
PM-24QKNT				3.9	12.5
PM-20SNT	5M	11.3	2.2	-	-
PM-20QSNT				3	10
PM-24SNT	4M	13.9	13.9	-	-
PM-24QSNT				3.9	10



QKNT = Ready punched profile with 10 mm's punch distance, 20 meter per carton.  
 KNT = Unpunched profile 20 meters per carton.  
 AN = Cut marker holders in standard lengths.  
 QSNT = Ready punched profile with 100 mm punch distance on compact disc.  
 SNT = Unpunched profile on compact disc.

### Size and Packaging

Cat. No.	Description	Number/Pack
PM-10033AN	PM10/33 transparent holder 33 mm cut loose in bag	100 PCS
PM-20033AN	PM20/33 transparent holder 33 mm cut loose in bag	
PM-24033AN	PM20/45 transparent holder 45 mm cut loose in bag	
PM-20066AN	PM20/66 transparent holder 66 mm cut loose in bag	50 PCS
PM-24033AN	PM24/33 transparent holder 33 mm cut loose in bag	100 PCS
PM-24066AN	PM24/66 transparent holder 66 mm cut loose in bag	
PM-24094AN	PM24/94 transparent holder 94 mm cut loose in bag	50 PCS
PM-20KNT	PM20 profile transparent	20 M
PM-20QKNT	PM20 profile punched transparent in carton	
PM-24KNT	PM24 profile transparent in carton	
PM-24QKNT	PM24 profile punched transparent in carton	
PM-20SNT	PM20 profile transparent	5 M
PM-20QSNT	PM20 profile punched transparent on compact disc	
PM-24SNT	PM24 profile transparent on compact disc	4 M
PM-24QSNT	PM24 profile punched transparent on compact disc	

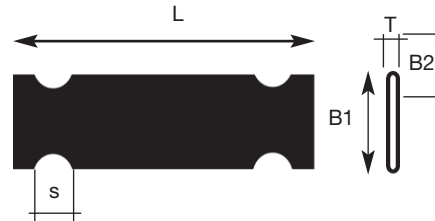

### Accessories

Cat. No.	Suitable Marking Label	Label Height mm
PM-10033AN	PF10021, PP-04200SN	4.2
PM-20033AN	PF20018, Promark PP-09000SN	9.0
PM-20045AN	MTX-MK9-PL090CN, MK8-PL090CN, Promark PP-09000SN	
PM-24033AN	PF20018 1 pce, PFC09518KA	12.0
PM-20066AN	PF20018; 1, 2 or 3 modules, PFC09518KA, Promark PP-09000SN, MK9-PL090CN, MK8-PL090CN	9.0
PM-24066AN	MK9-PL012CN PF20018; 1, 2 or 3 modules, PFC09518KA	12.0
PM-24094AN	MK9-PL090CN	

Regarding PF marking labels, PF marking tags cable ties (see page 97). Normally Ty-Rap® of 2.8 mm (e.g. TY5232M) should be used.

4.8 mm widths (e.g. TY525MX) are stronger but require more force to put through the punched holes of the PM sleeve.