


I.D. Tagging System


Cat. No.	Designation	Max. No. of Single Character Markers	Quantity Per Pack	Length (L)	Width (W)	Slot Width (SW)
SSM*	SINGLE-CHARACTER MARKER	–	50 (5x10) PCS	5.5	10.9	4.8
PKS10040FQ ◊	47 MM CARRIER STRIP	6	5.5	47.0	10.3	4.8
PKS10060FQ ◊	65 MM CARRIER STRIP	9	5.5	65.0	10.3	4.8
PKS10080FQ ◊	87 MM CARRIER STRIP	13	5.5	87.0	10.3	4.8
PKS10100FQ ◊	107 MM CARRIER STRIP	17	5.5	109.0	10.3	4.8
PKS10120FQ ◊	128 MM CARRIER STRIP	20	5.5	128.0	10.3	4.8

◊ = (S= RAISED BRIDGES), (H= HOLES)
 * = CHARACTERS

NOTE: PKS10040-PKS10120 not stamped with text can be used as carrier strips for single-character markers. The carrier strips can also be pre-stamped and combined with single character markers. Customized markers are mounted on tape.



CARRIER STRIP FOR SINGLE-CHARACTER MARKERS OR READY-MARKED MULTI-CHARACTER MARKING.

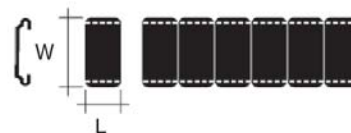

SINGLE-CHARACTER MARKERS.

Identify your cable bundles with permanent, Type 304 stainless steel imprinted tags applied with stainless steel cable ties.

- After imprinting tags, simply slip a tie through slots in the tag and fasten with a cable tie installation tool
- Tie down with 1/4 in. wide ties
- Type 304 Stainless Steel



Cat. No.	Width		Length	
	In.	mm	In.	mm
SSID100	0.75	19.05	2.0	51
SSID101	1.50	38.10	2.5	63
SSID102	0.75	19.05	3.5	89

Packaging Quantity: 100/box
 .015 in. (.254mm) Thickness

NOTE: Customized pre-embossed tags are available. Please consult Regional Sales Office for details. Add suffix (316) for 316 Stainless Steel.