



## Fully Insulated Butt Splices

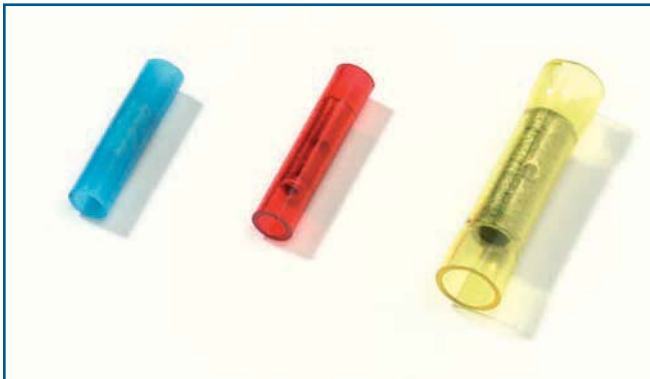

### Technical Information

<b>Material</b>	Electrolytic copper
<b>Plating</b>	Tin-plated
<b>Metal barrel</b>	Brazed seam to prevent barrel separation
<b>Insulation</b>	PC = Polycarbonate
<b>Temperature resistance</b>	+115°C / +125°C
<b>Colour coding of the insulation</b>	According to the wire size (DIN)
<b>Cable insertion</b>	Easy entry

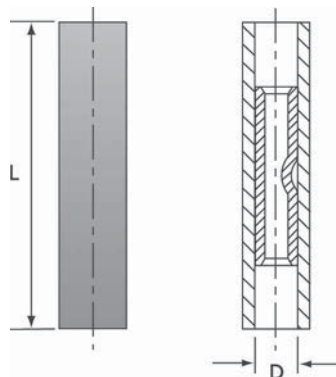

### Ordering Information

Cat. No.	Wire Size Range (mm <sup>2</sup> )	Colour	Dimensions		Wt. (g/100)	Qty. (pieces)	Crimping Tool
			L (mm)	D (mm)			
RAA15	0.5 - 1.5	Red	24.0	3.4	97	100	ERG2001A WT2124Y
RBB25	1.5 - 2.5	Blue	26.0	4.3	150		
RCC6	4.0 - 6.0	Yellow	33.0	6.5	316		