

## Cable Ties



Std. Pkg. Cat. No.	Body Width (in./mm)	Length (in./mm)	Max. Wire Bundle Dia. (in./mm)	Tensile Strength (lb./N)	Std. Pkg.
<b>Ty-Rap® Nylon 6/6 Cable Tie – Colour Assortment</b>					
<b>TY525M-CLRS</b>	0.19/4.83	7.31/185.67	1.75/44.45	50/222.40	10

Cable ties are same size as TY525M shown above. 10 ties in each colour (black, brown, red, orange, yellow, green, blue, purple, grey & white) are packaged. 100 total cable ties per package.

### The colours you need in convenient packs!

#### Ty-Rap® Nylon 6.6 Cable Ties – Colour Assortment

- Construction – nylon 6.6, 316 stainless steel locking device



Std. Cat. No.	Bulk Cat. No.	Description	Length (in./mm)	Tensile Strength (lb./N)	Bulk Pkg.
-	<b>TY525M-CLRS</b>	Multi-Coloured Natural Nylon (10 each of standard ten colours)	7.31/185.67	50/222.40	100 ties
-	<b>TY25M-0</b>	Black, Natural Nylon			1,000 Ties
-	<b>TY25M-1</b>	Brown, Natural Nylon			
-	<b>TY25M-2</b>	Red, Natural Nylon			
-	<b>TY25M-3</b>	Orange, Natural Nylon			
-	<b>TY25M-4</b>	Yellow, Natural Nylon			
-	<b>TY25M-5</b>	Green, Natural Nylon			
-	<b>TY25M-6</b>	Blue, Natural Nylon			
-	<b>TY25M-7</b>	Purple, Natural Nylon			
-	<b>TY25M-8</b>	Grey, Natural Nylon			
-	<b>TY25M-9</b>	White, Natural Nylon			


For use in temperatures ranging from -40°F to 185°F (-40°C to 85°C)

- UL Listed Natural 6.6 Nylon Cable Ties are suitable for use in air handling spaces (plenums) in accordance with Section 300.22 (C) & (D) of the National Electrical Code
- 100 standard ties in black, brown, red, orange, yellow, green, blue, purple, grey and white (10 each)
- Recommended tooling – ERG-50, WT1-TB


Natural nylon is standard. For coloured Ty-Rap® ties, add the following suffix numbers to catalogue numbers. **Example:** TY25M-2 would be red TY25M. (Consult Regional Sales Office for ordering information.)

**How to Order Coloured Ty-Rap® Cable Ties and Accessories**


Colour	Suffix No.	Colour	Suffix No.	Colour	Suffix No.	Colour	Suffix No.
Black	X	Red	2	Green	5	Grey	8
(outdoor)		Orange	3	Blue	6	White	9
Brown	1	Yellow	4	Purple	7		



TY533M



TY534M



TY535M  
TY5354M



TY537M


Great for use with screws, nuts and bolts for secure fastening to surfaces.

Std. Cat. No.	Bulk Cat. No.	Body Width (in./mm)	Length (in./mm)	Max. Wire Bundle Dia. (in./mm)	Mounting Hole	Tensile Strength (lb./N)	Std. Pkg.	Bulk Pkg.
<b>Ty-Rap® Mounting Head Cable Ties</b>								
TY533M	TY33M	0.09/2.29	4.00/101.60	0.63/16.00	#4	18/80.07	100	1,000
TY534M	TY34M	0.14/3.56	6.00/152.40	1.13/28.70	#8	40/177.90		
TY535M	TY35M	0.18/4.57	7.80/198.12	1.75/44.45	#10	50/222.40		
TY5354M	TY354M		14.60/370.84	4.00/101.60	#10			
TY1435M	-	0.19/4.83	7.80/198.12	1.77/44.96	0.248		-	
TY635M	-		7.24/183.90		0.138		100	
TYF535M	TYF35M					0.138		
TY537M	TY37M	0.30/7.62	13.90/353.06	3.50/88.90	1/4	120/533.80	50	500

Cable ties made from natural nylon 6/6 are excellent performers in most applications. Nylon 6/6 is recommended for use in temperatures ranging from 185°F to -40°F (85°C to -40°C).



TY554M

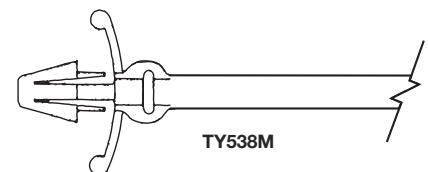

TY538M

For use in 3/16 in. and 1/4 in. pre-drilled holes. Thickness panel 0.094 max. (TY554M) Range 0.04 - 0.156 (TY538M)

Std. Cat. No.	Bulk Cat. No.	Body Width (in./mm)	Length (in./mm)	Max. Wire Bundle Dia. (in./mm)	Mounting Hole	Tensile Strength (lb./N)	Std. Pkg.	Bulk Pkg.
<b>Ty-Rap® Push Mount Cable Ties</b>								
TY554M	TY54M	0.14/3.56	5.96/151.38	1.13/28.70	3/16	40/177.90	100	1,000
TY538M	TY38M*	0.18/4.57	7.80/198.12	1.75/44.45	1/4	50/222.40		

Cable ties made from natural nylon 6/6 are excellent performers in most applications. Nylon 6/6 is recommended for use in temperatures ranging from 185°F to -40°F (85°C to -40°C).

\* Nylon 6/6 UV weather-resistant version available (TY38MX).



TY533MX



TY534MX



TY535MX  
TY5354MX



TY537MX

The MX series cable ties are recommended for outdoor use.

Std. Cat. No.	Bulk Cat. No.	Body Width (in./mm)	Length (in./mm)	Max. Wire Bundle Dia. (in./mm)	Mounting Hole	Tensile Strength (lb./N)	Std. Pkg.	Bulk Pkg.
<b>Ty-Rap® Nylon 6/6 Weather-Resistant</b>								
TY533MX	TY33MX	0.09/2.29	4.00/101.60	0.63/16.00	#4	18/80.07	100	1,000
TY534MX	TY34MX	0.14/3.56	6.00/152.40	1.13/28.70	#8	40/177.90		
TY535MX	TY35MX	0.18/4.57	7.80/198.12	1.75/44.45	#10	50/222.40		
TY5354MX	TY354MX		14.60/370.84	4.00/101.60	#10			
TY538MX	TY38MX	0.30/7.62	13.90/353.06	1.75/44.45	1/4		-	
TY537MX	TY37MX			3.50/88.90	1/4		120/533.80	50