


## Shrink-Kon® Heat-Shrinkable Tubing

### HS Series Heavy-Wall Heat-Shrinkable Tubing — Black

CAT. NO.	MIN. EXPANDED I.D. (IN.)	MAX. RECOVERED I.D. (IN.)	NOM. RECOVERED WALL (IN.)	STD. LENGTH (IN.)	FITS ANY LISTED OR CERTIFIED AL OR CU SPLICE WITH DIM NO LARGER THAN		STD. CABLE RANGE	PKG. QTY.
					O.D. (IN.)	LENGTH (IN.)		
HS16-12	.35	.12	.07	3	.27	1.00	#16 to #12 AWG	25
HS16-12L	.35	.12	.07	6	.27	1.00	#16 to #12 AWG	25
HS16-12-4	.35	.12	.07	48	.27	1.00	#16 to #12 AWG	5
HS12-6	.51	.16	.09	3	.38	1.75	#12 to #6 AWG	25
HS12-6L	.51	.16	.09	6	.38	1.75	#12 to #6 AWG	25
HS12-6-4	.51	.16	.09	48	.38	1.75	#12 to #6 AWG	5
HS6-1	.75	.24	.09	4	.63	2.50	#6 to #1 AWG	25
HS6-1L	.75	.24	.09	8	.63	2.50	#6 to #1 AWG	25
HS6-1-4	.75	.24	.09	48	.63	2.50	#6 to #1 AWG	5
HS4-30	1.10	.35	.12	5	.75	3.25	#4 to 3/0 AWG	20
HS4-30L	1.10	.35	.12	9	.75	3.25	#4 to 3/0 AWG	10
HS4-30-4	1.10	.35	.12	48	.75	3.25	#4 to 3/0 AWG	5
HS40-400	1.50	.47	.16	8	—	—	4/0 AWG to 400 kcmil	10
HS40-400L	1.50	.47	.16	12	—	—	4/0 AWG to 400 kcmil	10
HS40-400-4	1.50	.47	.16	48	—	—	4/0 AWG to 400 kcmil	5
HS500-1000	2.00	.63	.16	9	—	—	500–1000 kcmil	5
HS500-1000L	2.00	.63	.16	15	—	—	500–1000 kcmil	2
HS500-1000-4	2.00	.63	.16	48	—	—	500–1000 kcmil	2
HS12-30*	3.54	1.18	.16	12	—	—	800–1250 kcmil	2
HS30-30*	3.54	1.18	.16	30	—	—	800–1250 kcmil	2
HS30-4*	3.54	1.18	.16	48	—	—	800–1250 kcmil	1
HS12-40*	4.72	1.57	.17	12	—	—	1500–2500 kcmil	1
HS30-40*	4.72	1.57	.17	30	—	—	1500–2500 kcmil	1
HS40-4-TB*	4.72	1.57	.17	48	—	—	1500–2500 kcmil	1

Order multiple is std. pkg.  
All lengths have factory-applied sealant.  
UL File No. E9809, UL 486D.  
\* Not UL Listed.

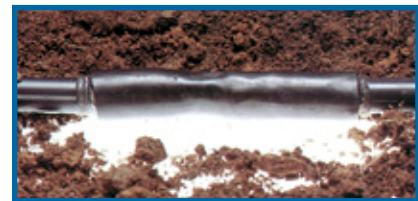

Wire Termination — Sta-Kon® Wire Termination & Insulation

### HS Series Heavy-Wall Heat-Shrinkable Tubing — Red

CAT. NO.	MIN. EXPANDED I.D. (IN.)	MAX. RECOVERED I.D. (IN.)	LENGTH (IN.)	FOR 2-WAY CONNECTOR CABLE SIZES	STD. PKG. QTY.
HS12-6LR	.51	.16	6	#8–#6 AWG	25
HS6-1LR	.75	.24	8	#6–#2 AWG	25
HS4-30LR	1.10	.35	9	#1–3/0 AWG	10

Order multiple is std. pkg.  
All lengths have factory-applied sealant.  
UL File No. E9809, UL 486D



### Heavy-Wall Tubing (25' rolls) — Black

CAT. NO.	MIN. EXPANDED I.D. (IN.)	MAX. RECOVERED I.D. (IN.)	NOMINAL RECOVERED WALL (IN.)	CODE CABLE SIZE	STD. PKG. (ROLLS)
HS16-12-25	.35	.12	.07	#14–#10 AWG	1
HS12-6-25	.51	.16	.09	#8–#6 AWG	1
HS6-1-25	.75	.24	.09	#6–#2 AWG	1
HS4-30-25	1.10	.35	.12	#1–3/0 AWG	1
HS40-400-25	1.50	.47	.16	2/0 AWG–350 kcmil	1
HS500-1000-25	2.00	.63	.16	250–500 kcmil	1

Order by reel, not by feet. 25' reels **not** supplied with factory-applied sealant.  
Not UL Listed.

