



TY533M



TY534M



TY535M
TY5354M



TY537M


Great for use with screws, nuts and bolts for secure fastening to surfaces.

| Std. Cat. No. | Bulk Cat. No. | Body Width (in./mm) | Length (in./mm) | Max. Wire Bundle Dia. (in./mm) | Mounting Hole | Tensile Strength (lb./N) | Std. Pkg. | Bulk Pkg. |
|---|---------------|---------------------|-----------------|--------------------------------|---------------|--------------------------|-----------|-----------|
| Ty-Rap® Mounting Head Cable Ties | | | | | | | | |
| TY533M | TY33M | 0.09/2.29 | 4.00/101.60 | 0.63/16.00 | #4 | 18/80.07 | 100 | 1,000 |
| TY534M | TY34M | 0.14/3.56 | 6.00/152.40 | 1.13/28.70 | #8 | 40/177.90 | | |
| TY535M | TY35M | 0.18/4.57 | 7.80/198.12 | 1.75/44.45 | #10 | 50/222.40 | | |
| TY5354M | TY354M | | 14.60/370.84 | 4.00/101.60 | #10 | | | |
| TY1435M | - | 0.19/4.83 | 7.80/198.12 | 1.77/44.96 | 0.248 | | - | |
| TY635M | - | | 7.24/183.90 | | 0.138 | | 100 | |
| TYF535M | TYF35M | | | | | 0.138 | | |
| TY537M | TY37M | 0.30/7.62 | 13.90/353.06 | 3.50/88.90 | 1/4 | 120/533.80 | 50 | 500 |

Cable ties made from natural nylon 6/6 are excellent performers in most applications. Nylon 6/6 is recommended for use in temperatures ranging from 185°F to -40°F (85°C to -40°C).



TY554M

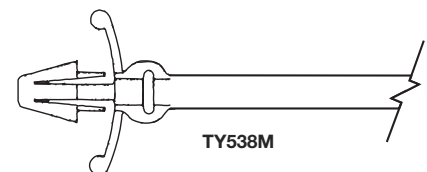


TY538M

For use in 3/16 in. and 1/4 in. pre-drilled holes. Thickness panel 0.094 max. (TY554M) Range 0.04 - 0.156 (TY538M)

| Std. Cat. No. | Bulk Cat. No. | Body Width (in./mm) | Length (in./mm) | Max. Wire Bundle Dia. (in./mm) | Mounting Hole | Tensile Strength (lb./N) | Std. Pkg. | Bulk Pkg. |
|--------------------------------------|---------------|---------------------|-----------------|--------------------------------|---------------|--------------------------|-----------|-----------|
| Ty-Rap® Push Mount Cable Ties | | | | | | | | |
| TY554M | TY54M | 0.14/3.56 | 5.96/151.38 | 1.13/28.70 | 3/16 | 40/177.90 | 100 | 1,000 |
| TY538M | TY38M* | 0.18/4.57 | 7.80/198.12 | 1.75/44.45 | 1/4 | 50/222.40 | | |

Cable ties made from natural nylon 6/6 are excellent performers in most applications. Nylon 6/6 is recommended for use in temperatures ranging from 185°F to -40°F (85°C to -40°C).

* Nylon 6/6 UV weather-resistant version available (TY38MX).



TY533MX



TY534MX



TY535MX
TY5354MX



TY537MX

The MX series cable ties are recommended for outdoor use.

| Std. Cat. No. | Bulk Cat. No. | Body Width (in./mm) | Length (in./mm) | Max. Wire Bundle Dia. (in./mm) | Mounting Hole | Tensile Strength (lb./N) | Std. Pkg. | Bulk Pkg. |
|--|---------------|---------------------|-----------------|--------------------------------|---------------|--------------------------|------------|-----------|
| Ty-Rap® Nylon 6/6 Weather-Resistant | | | | | | | | |
| TY533MX | TY33MX | 0.09/2.29 | 4.00/101.60 | 0.63/16.00 | #4 | 18/80.07 | 100 | 1,000 |
| TY534MX | TY34MX | 0.14/3.56 | 6.00/152.40 | 1.13/28.70 | #8 | 40/177.90 | | |
| TY535MX | TY35MX | 0.18/4.57 | 7.80/198.12 | 1.75/44.45 | #10 | 50/222.40 | | |
| TY5354MX | TY354MX | | 14.60/370.84 | 4.00/101.60 | #10 | | | |
| TY538MX | TY38MX | | | 1.75/44.45 | 1/4 | | - | |
| TY537MX | TY37MX | 0.30/7.62 | 13.90/353.06 | 3.50/88.90 | 1/4 | | 120/533.80 | 50 |