

## Mounting Bases, Cable Ties and Accessories

Great for securing cables!

### One-Piece Mounting Clamp



- Provides a fast and convenient method of securing bundles
- Single-piece design offers reduced installation time and maximized inventory control
- Integral top cover incorporates a unique ratchet design that is fully adjustable and releasable
- Available in a pressure-sensitive adhesive or screw mount design

| STD. PKG. CAT. NO. | BULK PKG. CAT. NO. | BASE STYLE       | MAXIMUM HEIGHT (IN.) | CLAMPING AREA          |                         | STD. PKG. QTY. | BULK PKG. QTY. |
|--------------------|--------------------|------------------|----------------------|------------------------|-------------------------|----------------|----------------|
|                    |                    |                  |                      | MINIMUM IN./MM         | MAXIMUM IN./MM          |                |                |
| TC5349A-TB         | TC349A-TB          | SRA* Adhesive    | .57                  | .18 x .24/4.57 x 6.10  | .035 x .24/.89 x 6.10   | 100            | 1,000          |
| TC5350A-TB         | TC350A-TB          | SRA* Adhesive    | .89                  | .20 x .59/5.08 x 14.99 | .45 x .59/11.43 x 14.99 | 100            | 1,000          |
| TC5350-TB          | —                  | Screw Mount (#8) | .89                  | .20 x .59/5.08 x 14.99 | .45 x .59/11.43 x 14.99 | 100            | 1,000          |

• Natural nylon color. \*Synthetic Rubber Adhesive Product Base is .94" x .94" (23.88 x 23.88 mm)

For adhesive-back bases, temperature rating is 32° F to 120° F (0° C to 48° C) For non-adhesive-back bases, temperature rating is -40° F to 185° F (-40° C to 85° C)

**Note:** See product expiration date on packages with adhesive. Periodically check product for adhesion and replace as needed. Product is for wire management only and is not intended for use as a primary support of wire, cable, etc.

Simple to install!

### Snap-In Mounting Base for Preassembled Ties




| STD. PKG. CAT. NO. | BULK PKG. CAT. NO. | MOUNTING METHOD | MAX. TIE WIDTH ACCOM. | LENGTH IN./MM | WIDTH IN./MM | MATERIAL  | STD. PKG. QTY. | BULK PKG. QTY. |
|--------------------|--------------------|-----------------|-----------------------|---------------|--------------|-----------|----------------|----------------|
| TC5353A            | TC353A             | SRA* Adhesive   | .190                  | 2.00/50.80    | 1.00/25.40   | Nylon 6/6 | 25             | 500            |

• Natural nylon color.  
Temperature Rating: 32° F to 120° F (0° C to 48° C).  
\*Synthetic Rubber Adhesive.


**Note:** See product expiration date on package. Periodically check product for adhesion and replace as needed. Product is for wire management only and is not intended for use as a primary support of wire, cable, etc.

Hole for #6 screw



Great for securing cables!

### Aluminum Mounting Plates

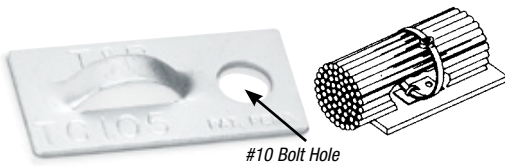

| STD. PKG. CAT. NO. | MOUNTING METHOD | WIDTH ACCOM. | MAX. TIE LENGTH ACCOM. | WIDTH IN./MM | MATERIAL | BULK PKG. QTY. |
|--------------------|-----------------|--------------|------------------------|--------------|----------|----------------|
| TC105              | TC2PA/Screws    | .190         | 1.00/25.40             | .50/12.70    | Aluminum | 1,000          |
| TC824-TB           | TC2PA           | .190         | 1.38/34.93             | .38/.38      | Aluminum | 1,000          |
| 650-41349*         | TC2PA/Screws    | .190         | 1.38/34.93             | .38/.38      | Aluminum | 1,000          |
| 650-41863          | Adhesive        | .190         | 1.38/34.93             | .38/.38      | Aluminum | 1,000          |

Temperature Rating: 32° F to 150° F (0° C to 66° C). \*650-41349 has two holes for mounting.

**Note:** See product expiration date on package. Periodically check product for adhesion and replace as needed. Product is for wire management only and is not intended for use as a primary support of wire, cable, etc.

Super strong adhesive!

### Mounting Base Adhesive



| STD. PKG. CAT. NO. | DESCRIPTION                                    | STD. PKG. QTY. |
|--------------------|--|----------------|
| TC2PA              | Consists of one tube of adhesive and activator | 1              |

**Note:** See product expiration date on package. Periodically check product for adhesion and replace as needed. Product is for wire management only and is not intended for use as a primary support of wire, cable, etc.