


Motor Pigtail Connectors

One Line to One Load (two wires)

Quick, reliable change-out of electric motors with no bolting, taping or loose connections

Features

- Complete line of motor lead disconnects for 600 V and 5 kV applications, covering wire range from #16 through 4/0 AWG
- Fast, snap-together assembly offers maximum labor savings
- No need for nuts, bolts and washers or insulating tape – simply slide on reusable boot
- Total assembly fits into tight motor housings
- Quick disconnect – no knife cutting of melted tape, eliminating the risk of accidental cutting of wire insulation, resulting motor downtime and installer exposure
- Meet or exceed electrical and mechanical performance of bolted connections
- Constructed of high-conductivity copper with tin-plating
- Female disconnects equipped with beryllium copper interface band for dependable connections

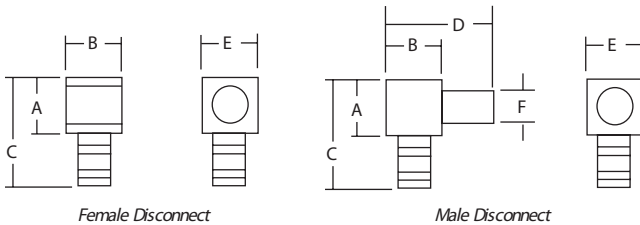

Cat. No. Certified to 600 V		Wire Size	Body Size	Colour Code	Boot insulation	Dimensions in. (mm)						Strip Length (in.)
Female Disconnect	Male Disconnect					A	B	C	D	E	F	
MD1614F-0	MD1614M-0	16-14 AWG	0	Blue	MDBOOT-0	0.25 (6.4)	0.25 (6.4)	0.63 (16.0)	0.52 (13.2)	0.25 (6.4)	0.13 (3.2)	3/8
MD1614F-1	MD1614M-1				MDBOOT-1	0.38 (9.7)	0.38 (9.7)	0.78 (19.8)	0.75 (19.1)	0.38 (9.7)	0.25 (6.4)	
MD1210F-1	MD1210M-1	12-10 AWG	1	Yellow	MDBOOT-1	0.38 (9.7)	0.35 (8.9)	0.78 (19.8)	0.75 (19.1)	0.38 (9.7)	0.25 (6.4)	7/16
MD1210F-2	MD1210M-2				MDBOOT-2	0.50 (12.7)	0.50 (12.7)	0.90 (22.9)	1.00 (25.4)	0.50 (12.7)	0.37 (9.4)	
MD8F-1	MD8M-1	8 AWG	1	Red	MDBOOT-1	0.38 (9.7)	0.38 (9.7)	0.82 (20.8)	0.75 (19.1)	0.38 (9.7)	0.25 (6.4)	1/2
MD8F-2	MD8M-2				MDBOOT-2	0.50 (12.7)	0.50 (12.7)	0.95 (24.1)	1.00 (25.4)	0.50 (12.7)	0.37 (9.4)	
MD6F-1	MD6M-1	6 AWG	1	Blue	MDBOOT-1	0.38 (9.7)	0.38 (9.7)	0.88 (22.4)	0.75 (19.1)	0.38 (9.7)	0.25 (6.4)	17/32
MD6F-2	MD6M-2				MDBOOT-2	0.50 (12.7)	0.50 (12.7)	1.02 (30.5)	1.00 (25.4)	0.50 (12.7)	0.37 (9.4)	
MD4F-2	MD4M-2	4 AWG	2	Grey	MDBOOT-2	0.50 (12.7)	0.50 (12.7)	1.03 (40.6)	1.00 (25.4)	0.50 (12.7)	0.37 (9.4)	9/16
MD2F-2	MD2M-2	2 AWG	2	Brown	MDBOOT-2	0.50 (12.7)	0.50 (12.7)	1.09 (48.3)	1.00 (25.4)	0.50 (12.7)	0.37 (9.4)	
MD2F-3	MD2M-3	2 AWG	3	Brown	MDBOOT-3	0.88 (22.4)	0.88 (22.4)	1.46 (37.1)	1.75 (44.5)	0.88 (22.4)	0.50 (12.7)	5/8
MD1F-2	MD1M-2				MDBOOT-2	0.50 (12.7)	0.50 (12.7)	1.23 (31.2)	1.00 (25.4)	0.50 (12.7)	0.37 (9.4)	
MD1F-3	MD1M-3	1 AWG	2	Green	MDBOOT-2	0.88 (22.4)	0.88 (22.4)	1.56 (39.6)	1.75 (44.5)	0.88 (22.4)	0.50 (12.7)	11/16
MD10F-3	MD10M-3				MDBOOT-3	0.88 (22.4)	0.88 (22.4)	1.56 (39.6)	1.75 (44.5)	0.88 (22.4)	0.50 (12.7)	
MD20F-3	MD20M-3	2/0 AWG	3	Black	MDBOOT-3	0.88 (22.4)	0.88 (22.4)	1.59 (40.4)	1.75 (44.5)	0.88 (22.4)	0.50 (12.7)	3/4
MD30F-3	MD30M-3	3/0 AWG			MDBOOT-3	0.88 (22.4)	0.88 (22.4)	1.71 (43.4)	1.75 (44.5)	0.88 (22.4)	0.50 (12.7)	
MD40F-3	MD40M-3	4/0 AWG	3	Orange	MDBOOT-3	0.88 (22.4)	0.88 (22.4)	1.81 (46.0)	1.75 (44.5)	0.88 (22.4)	0.50 (12.7)	-
MD40F-4	MD40M-4				MDBOOT-4	1.25 (31.8)	1.25 (31.8)	2.89 (73.4)	2.69 (68.3)	1.25 (31.8)	0.81 (22.4)	
MD250F-4	MD250M-4	250 kcmil	4	Purple	MDBOOT-4	1.25 (31.8)	1.25 (31.8)	2.89 (73.4)	2.69 (68.3)	1.25 (31.8)	0.81 (22.4)	-
MD350F-4	MD350M-4	350 kcmil			MDBOOT-4	1.25 (31.8)	1.25 (31.8)	2.89 (73.4)	2.69 (68.3)	1.25 (31.8)	0.81 (22.4)	
MD500F-4	MD500M-4	500 kcmil			MDBOOT-4	1.25 (31.8)	1.25 (31.8)	2.89 (73.4)	2.69 (68.3)	1.25 (31.8)	0.81 (22.4)	

Kits: page E60
 Tooling: pp. E4–E62
 Die Selector Chart: pp. E35–E50