


T&B Cable Ties®

From one end to the other, T&B® Cable Ties fit the needs of OEMs

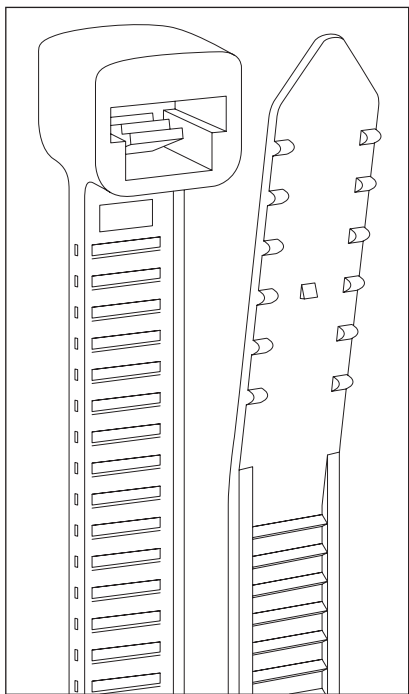

- The integrally formed nylon pawl combines low insertion and high locking strength
- A rounded, low-profile head makes for less snags
- Tails have an improved two-sided finger grip design that helps the operator grasp and pull ties snug
- “Sure Grip” tab keeps the tail from popping out while being threaded, then holds it securely for final tightening by hand or tool
- Quick, easy pull through increases productivity, reduces operator fatigue

Designed with OEMs in mind, this new series of competitively priced T&B® cable ties holds down costs and speeds up cable fastening. Our all-nylon design lowers installation costs and provides features to ease fastening for harness fabrication and wire bundling in the manufacturing environment.

T&B® cable ties are made of nylon 6/6 and perform well in most applications in temperatures ranging from -40°C to 85°C. The smooth edges are designed to prevent damage to wire insulation, reducing the opportunity for shorting, and tails are “turned up” for fast assembly. T&B® cable ties come in natural or outdoor weatherable black, and custom colours and options are available.

T&B® cable ties may be fastened with standard Thomas & Betts tying tools. All your favorite Ty-Rap® mounting bases and accessories may be used with T&B® cable ties. For harsh industrial environments, use our “grip of steel®” Ty-Rap® cable ties with the unique stainless steel barb. Ty-Rap® and T&B® cable ties combine to offer the most complete package of cable ties and accessories for the fastening market.

T&B® cable ties come in large poly bags for convenient inventory and easy access at the manufacturing site. Call your local Thomas & Betts distributor today and find out how well T&B® cable ties can fit your needs, from one end to the other.

Cat. No.	Min. Tensile Strength (in./lb.)	Military Standard Part No.	Tie Length (in.)	Max. Bundle Diameter (in.)	Width (in.)	Std. Pkg. (pieces)
T&B® Cable Ties						
TY075-18	18	MS3367-4	3.60	0.75	0.095	1,000
TY125-18	18	–	5.34	1.25	0.095	1,000
TY125-40	40	MS3367-5	5.60	1.25	0.140	1,000
TY200-18	18	–	7.75	2.00	0.095	1,000
TY200-40	40	–	8.00	2.00	0.140	1,000
TY200-120	120	–	8.63	2.00	0.299	500
TY300-40	40	–	11.40	3.00	0.140	1,000
TY175-50	50	MS3367-1	7.30	1.75	0.184	1,000
TY300-50	50	MS3367-7	11.40	3.00	0.184	1,000
TY400-50	50	MS3367-2	14.30	4.00	0.184	1,000
TY400-120	120	MS3367-3	14.30	4.00	0.301	500

Add suffix (-20) for cosmetic black, non-weatherable material.

Cat. No.	Min. Tensile Strength (in./lb.)	Military Standard Part No.	Tie Length (in.)	Max. Bundle Diameter (in.)	Width (in.)	Std. Pkg. (pieces)
Outdoor Weatherable (black)						
TY075-18X	18	–	3.60	0.75	0.095	1,000
TY125-18X	18	–	5.34	1.25	0.095	1,000
TY125-40X	40	–	5.60	1.25	0.140	1,000
TY200-18X	18	–	7.75	2.00	0.095	1,000
TY200-40X	40	–	8.00	2.00	0.140	1,000
TY200-120X	120	–	8.63	2.00	0.299	500
TY300-40X	40	–	11.40	3.00	0.140	1,000
TY175-50X	50	–	7.30	1.75	0.184	1,000
TY300-50X	50	–	11.40	3.00	0.184	1,000
TY400-50X	50	–	14.30	4.00	0.184	1,000
TY400-120X	120	–	14.30	4.00	0.301	500