

D Series 10 A 600 VAC

7 or 8, 15, 25 & 40 Contacts + Ground

Accessories

Wiring Adapter Insert for use with Panel Bases; allows single access direction panel-build wiring and easy terminal ID for service and testing

Cat. No.	Description
WAM-1	Label Insert Clip
WAM1B	Strip Blank
WAM1N64	Strip Nos. 1–64
WAM1AZ	Strip Letters A–Z



Crimp Tool

Cat. No.

WT80



Extraction Tool

Cat. No.

RT614

See page D54 for POF installation and tools info.

Install to Matching Series Hood/Base

7 or 8	15	25	40

Crimp Terminal Inserts

Crimp Terminal Inserts	7 or 8 + G	15 + G	25 + G	40 + G
 Male Insert (Order contacts below)	MC407D or MC408D	MC415D	MC425D	MC440D
 Female Insert (Order contacts below)	FC307D or FC308D	FC315D	FC325D	FC340D

Contacts Sold Separately

Screw Terminal Wiring Adapter Blocks

Screw Terminal Wiring Adapter Blocks	—	—	—	40 + G
 Male Insert, Ground L. 26–16 AWG (0.2–1.5mm ²)	—	—	—	MS440WAL
 Female Insert, Ground L. 26–16 AWG (0.2–1.5mm ²)	—	—	—	FS340WAL

Contacts Selection Chart

Crimp Contacts	Wire AWG (mm ²)	Identification
	22+ AWG (0.14–.37)	1
	20 AWG 0 (0.5)	2
	18 AWG (0.75–1)	3
	16 AWG (01.5)	4
	14 AWG (2.5)	5

For Optic Contacts

Crimp Contacts	Wire AWG (mm ²)	Identification
	18 AWG (0.75–1)	3


For All Crimp Terminal “D” Inserts:

Female	Male
FP22SD	MP22SD
FP20SD	MP20SD
FP18SD	MP18SD
FP16SD	MP16SD
FP14SD	MP14SD

Female	Male
FP18SD	MP18SD

Technical Information

Mounting Dimensions for Wiring Adapters

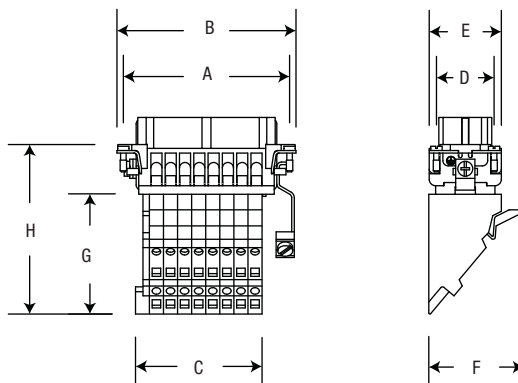

Insert Series	Cat. No.	Dimensions are in inches (millimeters)							
		A	B	C	D	E	f	g	H
B6	FS106WAL	1.73 (44)	2.01 (51)	1.03 (26.3)	1.06 (27)	1.34 (34)	1.77 (45)	2.28 (58)	3.54 (90)
	FS106WAR								
	MS206WAL								
	MS206WAR								
B10	FS110WAL	2.13 (54)	2.52 (64)	1.55 (39.5)	1.06 (27)	1.34 (34)	1.77 (45)	2.28 (58)	3.54 (90)
	FS110WAR								
	MS210WAL								
	MS210WAR								
B16	FS116WAL	3.05 (77.5)	3.32 (84.5)	2.33 (59.3)	1.06 (27)	1.34 (34)	1.77 (45)	2.28 (58)	3.54 (90)
	FS116WAR								
	MS216WAL								
	MS216WAR								
B24	FS124WAL	4.09 (104)	4.37 (111)	3.36 (85.7)	1.06 (27)	1.34 (34)	1.77 (45)	2.28 (58)	3.54 (90)
	FS124WAR								
	MS224WAL								
	MS224WAR								
D40	FS340WAL	3.05 (77.5)	3.27 (83)	2.21 (56)	1.06 (27)	1.34 (34)	3.19 (81)	4.53 (115)	5.12 (130)
	MS440WAL								
D64	FS364WAL	4.09 (104)	4.33 (110)	3.39 (86.3)	1.06 (27)	1.34 (34)	3.19 (81)	4.53 (115)	5.12 (130)
	MS464WAL								

-WAL — ground left, -WAR — ground right