

# EMC System

## EMC connectors with female thread




VIMV

### VIMV

Connector straight, female UN thread for MIL-C5015

| Order No.<br>black, IP68 | Thread<br>UN | Fits to<br>NW | Fits to<br>F.CK | Fits to<br>F.CU | Fits to<br>F.HY | Thread<br>length | Overall<br>length |
|--------------------------|--------------|---------------|-----------------|-----------------|-----------------|------------------|-------------------|
| BVIMV-U182               | 3/4"-20      | 12            | 12.5            | 12              | 12              | 10.0 mm          | 75.0 mm           |
| BVIMV-U212               | 7/8"-20      | 12            | 12.5            | 12              | 12              | 10.0 mm          | 75.0 mm           |
| BVIMV-U247               | 1"-20        | 17            | 15              | 20              | 15              | 10.0 mm          | 85.0 mm           |
| BVIMV-U353               | 1 1/16"-18   | 23            | 20 / (25)       | 20              | 20              | 10.0 mm          | 92.5 mm           |
| BVIMV-U357               | 1 1/16"-18   | 17            | 15              | 20              | 15              | 10.0 mm          | 87.0 mm           |
| BVIMV-U433               | 1 3/4"-18    | 23            | 20 / (25)       | 20              | 20              | 10.0 mm          | 95.0 mm           |
| BVIMV-U569               | 2 1/4"-16    | 29            | 25 / (30)       | 20 / (40)       | 35              | 10.0 mm          | 95.0 mm           |
| BVIMV-U566               | 2 1/4"-16    | 36            | 30 / (35)       | 40              | 40              | 10.0 mm          | 110.0 mm          |
| BVIMV-U568               | 2 1/4"-16    | 48            | 35              | 40              | 40              | 10.0 mm          | 110.0 mm          |

- Suitable for MIL connector series C5015
- Very suitable for the use with PMA screening braids
- Female thread with O-ring

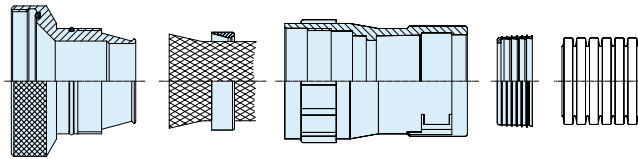

Content of delivery includes blue marked products.




VIMV

### VIMV

Connector straight, female UNEF thread for MIL-C26482G

| Order No.<br>black, IP68 | Thread<br>UNEF | Fits to<br>NW | Fits to<br>F.CK | Fits to<br>F.CU | Fits to<br>F.HY | Thread<br>length | Overall<br>length |
|--------------------------|----------------|---------------|-----------------|-----------------|-----------------|------------------|-------------------|
| BVIMV-U212-14            | 7/8"-20        | 12            | 12.5            | 12              | 12              | 14.0 mm          | 75.0 mm           |
| BVIMV-U247-14            | 1"-20          | 17            | 15              | 20              | 15              | 14.0 mm          | 90.0 mm           |
| BVIMV-U267-14            | 1 1/16"-18     | 17            | 15              | 20              | 15              | 14.0 mm          | 90.0 mm           |
| BVIMV-U293-14            | 1 3/16"-18     | 23            | 20              | 20              | 20              | 14.0 mm          | 90.0 mm           |
| BVIMV-U303-14            | 1 1/4"-18      | 23            | 20              | 20              | 20              | 14.0 mm          | 90.0 mm           |
| BVIMV-U323-14            | 1 9/16"-18     | 23            | 20              | 20              | 20              | 14.0 mm          | 90.0 mm           |
| BVIMV-U359-14            | 1 7/16"-18     | 29            | 20              | 20              | 35              | 14.0 mm          | 95.0 mm           |

- Suitable for MIL connector series C26482G
- Very suitable for the use with PMA screening braids
- No seal on female thread side



Content of delivery includes blue marked products.