


Aluminum Lugs

Designed for general applications and for installation on Homac® 125-N Series insulated buses.

Aluminum Two-Hole NEMA Lugs — Common Die Series



- Entire conductor range installed by four dies to reduce your die inventory
- Stacking lugs double terminal capacity of transformer spades and buses to save money
- Dual-rated for use with aluminum and copper conductors
- Made from aluminum for high strength and high conductivity
- Prefilled with oxide inhibitor to prevent oxidation and keep out moisture
- All lugs marked with conductor sizes and die references for easy identification
- Meets or exceeds ANSI C119.4 specifications

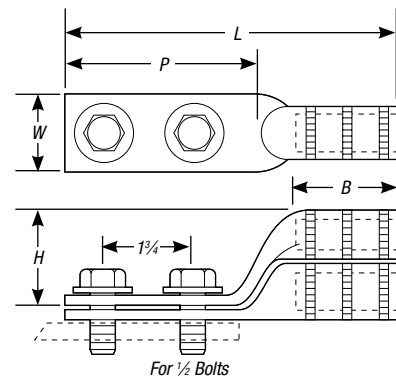

STRAIGHT LUG CAT. NO.	STACKING LUGS CAT. NO.	CONDUCTORS — AL OR CU					INSTALLING DIES	B	H	L	P	W
		CONCENTRIC	COMPRESSED	COMPACT	SOLID	ACSR						
SA 8 N	—	#8	—	—	#6	—	TU, 52, BG, 243, 3/8, CSA 22	1 ¹⁵ / ₁₆	—	5 ¹ / ₈	3 ³ / ₁₆	7 ¹ / ₈
SA 6 N	SASL 6 N	#6	#6	#4	#4	#6		1 ¹⁵ / ₁₆	1 ¹ / ₂	5 ¹ / ₈	3 ³ / ₁₆	7 ¹ / ₈
SA 4 N	—	#4	#4	#4	#2	#4		1 ¹⁵ / ₁₆	—	5 ¹ / ₈	3 ³ / ₁₆	7 ¹ / ₈
SA 3 N	—	#2	#2	#1, #2	#1	—		1 ¹⁵ / ₁₆	—	5 ¹ / ₈	3 ³ / ₁₆	7 ¹ / ₈
SA 2 N	—	#1, #2	#1	#1	1/0	#2		1 ¹ / ₂	—	5 ¹ / ₁₆	3 ¹ / ₈	1
SA 386 N	—	#1, 1/0	#1, 1/0	1/0	—	#1		1 ²⁷ / ₃₂	—	5 ¹ / ₂	3	7 ¹ / ₈
AL 1/0 N	ASL 1/0 N	1/0	1/0	2/0	2/0	1/0	TX, 76, 249, 840, 845, 11A, CSA 24	1 ¹ / ₂	1 ¹ / ₂	5 ¹ / ₄	3 ³ / ₁₆	7 ¹ / ₈
SA 2/0 N	SASL 2/0 N	2/0	2/0	3/0	3/0	2/0 (6/1)		1 ¹⁵ / ₁₆	1 ³ / ₄	6	3 ³ / ₈	1 ¹ / ₄
SA 3/0 N	SASL 3/0 N	3/0	4/0	4/0	—	3/0		1 ¹⁵ / ₁₆	1 ³ / ₄	6	3 ³ / ₁₆	1 ¹ / ₃₂
SA 4/0 N	SASL 4/0 N	4/0, 250	4/0, 250	250, 300	—	4/0	96, 299, 655, 705, 321, 316, 13A, 1 ¹ / ₆ -1, 472, CSA 28	1 ¹⁵ / ₁₆	1 ³ / ₁₆	6	3 ³ / ₁₆	1 ¹ / ₃₂
SA 300 N	—	300	300	350	—	266.8 (18/1)		2 ¹ / ₁₆	—	6 ¹ / ₄	3	1 ¹ / ₄
SA 350 N	—	336.4–350	350	400	—	266.8 (26/7), 336.4 (18/1)		2 ³ / ₁₆	—	6 ¹ / ₄	3	1 ¹ / ₄
SA 400 N	—	336.4–400	400	500	—	336.4 (18/1), 397.5 (18/1)	2 ¹ / ₁₆	—	6 ³ / ₈	3	1 ¹ / ₄	

Note: For tin-plating option, add "-TN" suffix to the catalog number.