

Galvanized Rigid Conduit (GRC) and Kwik-Couple™ GRC

Galvanized Rigid Conduit (GRC)

- Hot-dip galvanized for excellent corrosion resistance
- High strength ductile steel for long life and easy bending
- Smooth, continuous raceways for fast wire pulling
- Kwik-Release End Cap to protect threads
- True Color™ GRC special orders available
- CSA Certified to Safety Standard C22.2 No.45.1
- Manufactured in accordance with ANSI C80.1
- Available in sizes 1/2 (16) - 6 (155)

Kwik-Couple Galvanized Rigid Conduit (GRC)

- All the benefits of GRC Conduit
- Factory installed Kwik-Couple™ couplings are available on GRC conduit


Just line up the ends, spin the coupling forward onto the next piece and wrench tighten. It's that easy!

- No separate couplings to purchase, inventory or install
- Kwik-Release End Cap to protect threads
- True Color Kwik-Couple GRC special orders available
- CSA Certified to Safety Standard C22.2 No.45.1 & C22.2 No.18.3
- Manufactured in accordance with ANSI C80.1
- Available in sizes 2 1/2 (63) - 5 (129)


Kwik-Couple Rigid Elbows

- Also available with pre-installed Kwik-Couple Couplings
- Made to order, contact us for lead times

Quality, Long Lasting Heavy Duty Steel Conduit

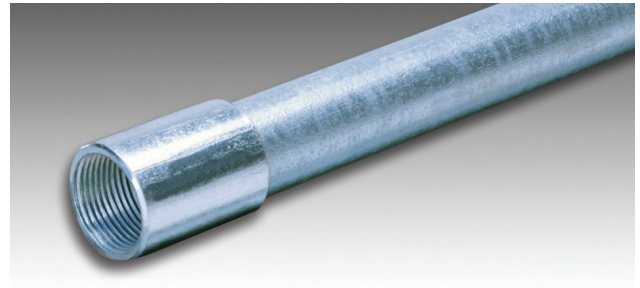

For Faster Installations Use the Kwik-Couple GRC Connection

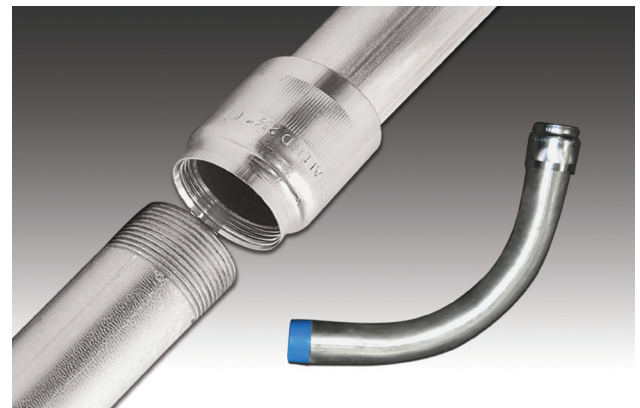

* U.S. Patent Numbers 7,404,582 and 7,726,001.

Galvanized Rigid Conduit (GRC)

CSA Certified to Safety Standard C22.2 No.45.1

Manufactured in accordance with ANSI C80.1



Trade Size	Metric Designator	Outside Diameter ¹		Nominal Wall Thickness ²		Approximate Weight Per 100 Ft. (30.5M)		Bundle Quantity	
		in	mm	in	mm	lb	kg	ft	m
1/2	16	0.840	21.34	0.104	2.64	82	37.2	1000	304.8
3/4	21	1.050	26.67	0.107	2.72	109	49.4	1000	304.8
1	27	1.315	33.40	0.126	3.20	161	73.0	500	152.4
1 1/4	35	1.660	42.16	0.133	3.38	218	98.9	250	76.2
1 1/2	41	1.900	48.26	0.138	3.51	263	119.3	250	76.2
2	53	2.375	60.33	0.146	3.71	350	158.8	200	61.0
2 1/2	63	2.875	73.03	0.193	4.90	559	253.6	100	30.5
3	78	3.500	88.90	0.205	5.21	727	329.8	100	30.5
3 1/2	91	4.000	101.60	0.215	5.46	880	399.2	100	30.5
4	103	4.500	114.30	0.225	5.72	1030	467.2	100	30.5
5	129	5.563	141.30	0.245	6.22	1520	689.5	100	30.5
6	155	6.625	168.28	0.266	6.76	1785	809.7	100	30.5

¹ Outside diameter tolerances: Size 1/2 (16) to 1 1/2 (41) +/- 0.015" (0.38mm);
² (53) to 6 (155) +/- 1%

Each length of conduit with coupling attached will be nominally 10' (3.05m)

² For information only. Not a requirement of the CSA Standard.

NOTE: Special orders are non-cancelable, non-returnable and non-refundable.