

MEDIUM VOLTAGE CAPACITOR FUSES/A100C-A550C



MEDIUM VOLTAGE CAPACITOR FUSES

Ferraz Shawmut capacitor fuses are designed to ANSI C37-41. They are current limiting operating without noise or discharge and are designed to be used indoors in a general purpose enclosure or outdoors in a weatherproof enclosure. These are non-disconnecting fuses requiring the use of a disconnect switch. These capacitor fuses provide both short circuit and overload protection and are intended to protect against capacitor case rupture or dielectric failure within the capacitor.

The various mounting configurations offer manufacturers a wide range of cost and space saving solutions and a large choice of equivalent products to users.

E


APPLICATIONS:

- Capacitor Protection
- Power Factor Correction Equipment
- Harmonic Filtering Equipment
- Induction Heating System
- High Power Drive
- Welders

Features/Benefits

- High interrupting capacity
- Current limitation
- Blown fuse indication
- Direct mount
- Clip style mount
- Bus mount
- Non-venting for silent operation

Catalog Numbering System

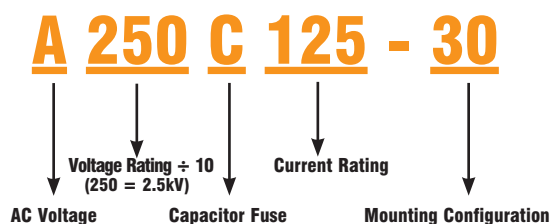

Ratings

- **A100C**
AC: 25 to 125 Amps, 1000 V Maximum, 50 kA I.R. Sym.
- **A150C**
AC: 25 to 200 Amps, 1500 V Maximum, 40 kA I.R. Sym.
- **A250C**
AC: 25 to 200 Amps, 2500 V Maximum, 50 kA I.R. Sym.
- **A300C**
AC: 50 to 175 Amps, 3000 V Maximum, 50 kA I.R. Sym.
- **A430C**
AC: 6 to 100 Amps, 4300 V Maximum, 65 kA I.R. Sym.
- **A550C**
AC: 6 to 50 Amps, 5500 V Maximum, 65 kA I.R. Sym.

MEDIUM VOLTAGE CAPACITOR FUSES/A100C-A150

1.0 kV - 1.5 kV

Catalog Numbers, Ampere Ratings, Dimensions

Part Number	Ampere Rating	Melting I _t (kA·s)	Maximum Clearing I _t (kA·s)	Maximum 1 Phase Interrupting Rating (kA)	Overall Length Inches (mm)	Tube Length Inches (mm)	Indicator Housing Inches (mm)	Body Dia Inches (mm)	Bracket Dimensions Inches (mm)	
1.5 kV Max Type 10 inner thread to screw					A	B	C	D	E	F
A150C25-10	25	4	12	40 kA @1500V RMS Sym	7.08 (179.8)	6.38 (162.1)	.70 (17.8)	1.42 (36.0)		
A150C50-10	50	16	50							
A150C60-10	60	25	70							
A150C75-10	75	35	110							
A150C90-10	90	50	150							
A150C100-10	100	65	200							
A150C110-10	110	80	250							
A150C120-10	120	100	310							
A150C125-10	125	125	330							
A150C130-10	130	125	330							
A150C135-10	135	130	350							
A150C140-10	140	130	350							
A150C150-10	150	150	390							
A150C160-10	160	185	480							
A150C165-10	165	185	480							
A150C175-10	175	225	600							
A150C200-10	200	300	800							
1.5 kV Max Type 20 screw to bolt (flat bracket)										
A150C25-20	25	3.2	6.5	40 kA @1500V RMS Sym	6.84 (173.6)	5.73 (145.5)	1.42 (36.0)	1.10 (27.9)	3.00 (76.2)	1.25 (31.8)
A150C50-20	50	13	27							
A150C60-20	60	18	38							
A150C75-20	75	30	60							
A150C90-20	90	35	72							
A150C100-20	100	52	105							
A150C110-20	110	58	120							
A150C120-20	120	73	150							
A150C125-20	125	82	165							
A150C130-20	130	90	190							
A150C135-20	135	90	190							
A150C140-20	140	105	220							
A150C150-20	150	120	240							
A150C160-20	160	185	480							
A150C165-20	165	185	480							
A150C175-20	175	225	600							
A150C200-20	200	300	800							

