

660V DC Ferrule Fuses

Size: 27x60

Features/Benefits:


- Full range D.C. operation
- 27x60mm ceramic cylindrical body
- Blown-fuse indicator striker

Catalog Numbers, Ratings

Size (Mm)	Current Rating I_N (A)	Interrupting Rating	Watts Loss		Catalog No.	Ref. No.
			0.8 I_N	I_N		
27 x 60	0.8	@ 660V DC 50kA L/R = 15ms	0.25	0.4	CC 6,621 CP gRB 27x60/0.8	H098585
	1		0.25	0.4	CC 6,621 CP gRB 27x60/1	J098586
	1.5		0.35	0.6	CC 6,621 CP gRB 27x60/1.5	K098587
	2		0.4	0.7	CC 6,621 CP gRB 27x60/2	P098591
	3.15		0.6	1	CC 6,621 CP gRB 27x60/3.15	Q098592
	4		0.6	1	CC 6,621 CP gRB 27x60/4	R098593
	5		0.7	1.1	CC 6,621 CP gRB 27x60/5	T098595
	6.3		0.8	1.3	CC 6,621 CP gRB 27x60/6.3	Z098600
	8		1.2	2	CC 6,621 CP gRB 27x60/8	L076301
	10		1.3	2.3	CC 6,621 CP gRB 27x60/10	M076302
	12		1.4	2.4	CC 6,621 CP gRB 27x60/12	L075703
	16		1.9	3.3	CC 6,621 CP gRB 27x60/16	N076303
	20		2.4	4.1	CC 6,621 CP gRB 27x60/20	C077006
	25		2.8	4.7	CC 6,621 CP gRB 27x60/25	M075635
	32		3.5	6	CC 6,621 CP gRB 27x60/32	P076304
	40		4.7	8	CC 6,621 CP gRB 27x60/40	Q076305
	50		4.8	8.3	CC 6,621 CP gRB 27x60/50	R076306
	63		5.6	9.6	CC 6,621 CP gRB 27x60/63	P079961
	80		6.4	11.2	CC 6,621 CP gRB 27x60/80	S079964
100	7.4	12.9	CC 6,621 CP gRB 27x60/100	T099400		
110	7.7	13.7	CC 6,621 CP gRB 27x60/110	S076307		

Blown fuse indicator minimum trip voltage: 20V

Dimensions

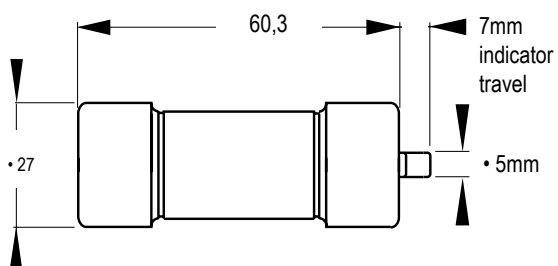

Indicator Trip Force: 4.5N (1lb) at 0mm-2.5N (1/2lb) at 7mm (1/4")



Ratings:

Volts : 660VDC
Amps : 0.8 to 110A
IR : 50kA I.R.
L/R : 15mSec