

# 1500V DC Ferrule Fuses

Size: 20x190


## Features/Benefits:

- Blown-fuse indicator striker  
CC I59I CP gRC
- 20x190 ceramic cylindrical body
- Full range D.C. operation
- CC 1500, without indicator

## Catalog Numbers, Ratings

Size	Current Rating $I_N$ (A)	Interrupting $I_N$ (A)	Watts Loss		Catalog Number	Ref. No.
			0.8 $I_N$	$I_N$		
20 x 190	6	@ 1500V DC 60kA L/R = 40ms	4.8	7.8	CC 1591 CP gRC 20x190/6	D083102
	8		5.3	8.8	CC 1591 CP gRC 20x190/8	V083738
	10		6.5	10.5	CC 1591 CP gRC 20x190/10	G087245
	12		7.0	11.5	CC 1591 CP gRC 20x190/12	Y080429
	16		8.0	13	CC 1591 CP gRC 20x190/16	N088378
	20		9.5	15	CC 1591 CP gRC 20x190/20	Q087345
	25		12	19.5	CC 1591 CP gRC 20x190/25	Z080430
	32		16	26	CC 1591 CP gRC 20x190/32	G085911
	6		4.8	7.8	CC 1500 CP gRC 20x190/6	Z089469
	8		5.3	8.8	CC 1500 CP gRC 20x190/8	A089470
	10		6.5	10.5	CC 1500 CP gRC 20x190/10	B089471
	12		7.0	11.5	CC 1500 CP gRC 20x190/12	C089472
	16		8.0	13	CC 1500 CP gRC 20x190/16	D089473
	20		9.5	15	CC 1500 CP gRC 20x190/20	E089474
	25		12	19.5	CC 1500 CP gRC 20x190/25	F089475
	32		16	26	CC 1500 CP gRC 20x190/32	G089476

## Dimensions

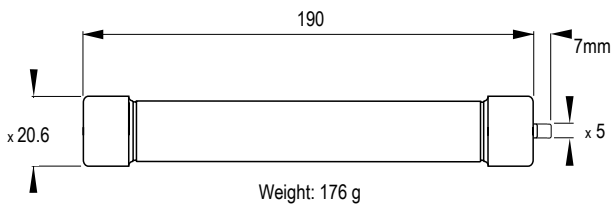

Indicator Trip Force: 4.5N (1lb) at 0mm - 2.5N (1/2lb) at 7mm (1/4") - when so equipped\*



## Ratings:

**Volts** : 1500VDC

**Amps** : 6 to 32A

**IR** : 60kA I.R. DC

**L/R** : 40mSec

Max AC Voltage (50/60 Hz)

3000V @ 50k A I.R.