

# Straight Blade Devices

## Features and Benefits

### Valise® Plugs and Connector Bodies

Hubbell Valise plugs go together in seconds but stay together securely for reliable long-term operation. Eight loadbearing, locking lugs in the impact- and crush-resistant nylon body assure a positive grip. Devices feature patented “wire bundling” terminals that are easy to wire and provide positive, reliable terminations



HBL5965VY



#### Housing Design

- Removable cord inserts to accommodate a wide range of cord sizes, .220"-.660" (5.6-16.8)
- Powerful cord grips prevent conductor slippage and strain on wiring terminals
- Eight specially designed load bearing locking lugs insure a positive fit as the blade holder and sides are closed



#### Internal Design

- Unique patented clamp-type terminals provide a superior electrical connection by “bundling” the conductor strands when clamps are tightened
- Nylon webs are provided to make wiring quick and easy during assembly
- Two captive multiple drive assembly screws

### Elastogrip® High Visibility Yellow Plugs and Connectors

Hubbell straight blade devices, female connector body, Elastogrip watertight, industrial/commercial grade, 2-pole 3-wire grounding, 15A 125V, NEMA 5-15R, yellow, single pack. Tough nylon body provides superior resistance in harsh abusive environments. IP55 suitability when closure plug inserted or when installed and used properly with mating watertight plug.




HBL15W47



#### Watertight Plug Housing Design

- Thermoplastic elastomer housing resists weathering caused by ultraviolet rays and ozone better than rubber; also oil and chemical resistant
- Nylon compression nut keeps water and dust from getting into the body around the cord



#### Watertight Plug Internal Design

- Three separate transparent wiring chambers allow for visual inspection
- Multiple drive “U-Drive” fast lead body assembly screws
- Neoprene bushing keeps water and dust out
- Color coded Kellems GOTCHA® rings provide increased cord retention



#### Watertight Connector Housing Design

- Closure plug seals connector body when disconnected from plug
- Integral weatherproofing shroud seals connection between plug and connector



#### Watertight Connector Internal Design

- Pretensioned “bypass” design female contacts for abuse resistance and reliability
- Nylon compression nut keeps water and dust from getting into the body around the cord



#### Dust Tight Plug Housing Design

- Thermoplastic elastomer housing
- Powerful nylon cord grip prevents strain on terminals



#### Dust Tight Plug Internal Design

- Multiple drive “U-Drive” fast lead body assembly screws
- Dust and moisture seal keeps out liquids, metal filings and other foreign materials

# Straight Blade Devices



## 15A, 125V, 2 Pole, 2 Wire Non-Grounding, Valise® Plugs

**IP20**  
SUITABILITY



**15A 125V**  
NEMA 1-15R  
UL CSA  
0.5 HP




**15A 125V**  
NEMA 1-15P  
UL CSA  
0.5 HP

| Description                  | Cord Diameter            | Catalog Number       |
|------------------------------|--------------------------|----------------------|
| Yellow nylon, non-polarized. | .218"-.385"<br>(5.5-9.8) | - <b>HBL5865VY</b>   |
| Yellow nylon, polarized.     | .218"-.385"<br>(5.5-9.8) | - <b>HBL5866VY</b>   |
| Black nylon, polarized.      | Type 17/2 "SVT" cord     | - <b>HBL5867VBLK</b> |




**HBL5865VY**

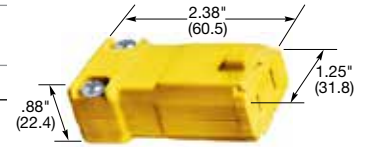

**HBL5866VY**

### Valise® Connector Bodies

| Description   | Cord Diameter            | Catalog Number     |
|---------------|--------------------------|--------------------|
| Yellow nylon. | .218"-.385"<br>(5.5-9.8) | <b>HBL5869VY</b> - |



**HBL5869VY**



## 15A, 277V AC, 2 Pole, 3 Wire Grounding, Plugs



**15A 277V AC**  
NEMA 7-15R  
UL CSA  
2 HP



**15A 277V AC**  
NEMA 7-15P  
UL CSA  
2 HP

| Description                   | Cord Diameter           | Catalog Number    |
|-------------------------------|-------------------------|-------------------|
| Finger grip, black elastomer. | .31"-.43"<br>(7.9-10.9) | - <b>HBL5929*</b> |



**HBL5929**

### Receptacles and Connector Bodies

| Description   | Cord Diameter             | Catalog Number   |
|---|---------------------------|------------------|
| Receptacle, flush duplex, brown, back and side wired. | -                         | <b>HBL5302</b> - |
| Connector Body, phenolic and steel body.              | .296"-.625"<br>(7.5-15.9) | <b>HBL5324</b> - |

Note: \*Not UL Listed.

Horsepower ratings are AC only.

See pages A-47 and A-48 for accessories.



**HBL9758VY**



## 20A, 250V, 2 Pole, 2 Wire Non-Grounding, Valise® Plugs

**IP20**  
SUITABILITY




**20A 250V**  
NEMA 2-20R  
UL Listed  
2 HP



**20A 250V**  
NEMA 2-20P  
UL Listed  
2 HP

| Description   | Cord Diameter             | Catalog Number     |
|---------------|---------------------------|--------------------|
| Yellow nylon. | .220"-.660"<br>(5.6-16.8) | - <b>HBL9758VY</b> |



**HBL5552B**

### Receptacle, Single

| Description     | Catalog Number    |
|-----------------|-------------------|
| Black phenolic. | <b>HBL5552B</b> - |

Note: Horsepower ratings are AC only and apply to plugs and receptacles only.

See pages A-47 and A-48 for accessories.

Dimensions in Inches (mm)