


# Support Grips Conduit Riser

Ring Type, Double Weave, Tin-Coated Bronze

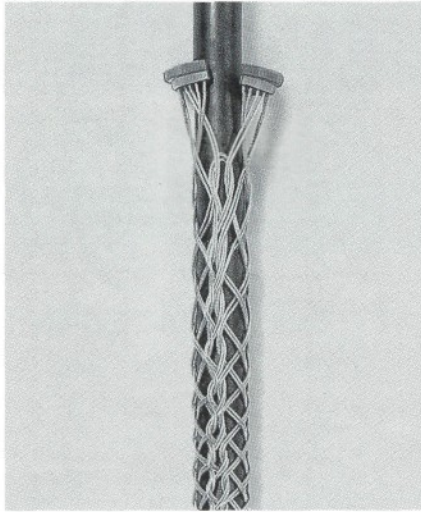

### Read This Data

It is important that you read all breaking strength, safety and technical data relating to this product on pages 83 through 88.

### Double Weave, Split Mesh, Lace Closing

Kellems® Conduit Riser Support Grips will support cable runs in vertical or sloping standard rigid conduit. The grip is fastened to a support ring which seats on the rim of the conduit. The entire grip is supported by the conduit itself and no other hardware is required. See page 82 for ring dimensions. The rings will fit schedule 40, standard rigid conduit. For permanent support when cable end is not available.

#### Suitable For Schedule 40 Conduit Only


Cable Sizes Inches (cm.)	.75-.99 (1.90-2.51)	1.00-1.24 (2.54-3.15)	1.25-1.49 (3.17-3.78)	1.50-1.74 (3.81-4.42)	1.75-1.99 (4.44-5.05)	2.00-2.49 (5.08-6.32)	2.50-2.99 (6.35-7.59)	3.00-3.49 (7.62-8.86)	3.50-3.99 (8.89-10.13)
Model	RS-075	RS-100	RS-125	RS-150	RS-175	RS-200	RS-250	RS-300	RS-350
Length Inches (cm.)	11 (27.94)	12 (30.48)	12 (30.48)	14 (35.56)	15 (38.10)	17 (43.18)	18 (45.72)	20 (50.80)	21 (53.34)
Conduit Sizes Inches	Catalog Numbers Approx. Breaking Strength Lbs. (N)								
1¼	02212003 1580 (7,028)	•	•	•	•	•	•	•	•
1½	02212007 1500 (6,672)	02212009 2040 (9,074)	•	•	•	•	•	•	•
2	02212010 1430 (6,361)	02212012 1930 (8,585)	02212013 2040 (9,024)	•	•	•	•	•	•
2½	02212014 1350 (6,005)	02212016 1810 (8,051)	02212017 1910 (8,496)	02212018 2040 (9,074)	02212019 2730 (12,143)	•	•	•	•
3	02212020 1270 (5,649)	02212022 1700 (7,562)	02212023 1780 (7,917)	02212024 1890 (8,407)	02212025 2520 (11,209)	02212026 4300 (19,126)	•	•	•
3½	•	•	•	•	•	02212033 3910 (17,392)	02212034 4300 (19,126)	•	•
4	02212035 1110 (4,937)	02212037 1470 (6,538)	02212038 1510 (6,716)	02212039 1580 (7,028)	02212040 2110 (9,385)	02212041 3530 (15,701)	02212042 3820 (16,991)	02212043 5380 (23,930)	•
5	•	•	•	•	•	•	02212061 2860 (12,721)	02212062 3760 (16,724)	02212063 4170 (18,548)
6	•	•	•	•	•	•	02212071 2365 (10,519)	02212072 2955 (13,144)	02212073 2955 (13,144)

Note: Stainless steel support grips are available upon request. Consult factory for details.

## Support Grips Conduit Riser

### Read This Data

It is important that you read all breaking strength, safety and technical data relating to this product on pages 83 through 88.

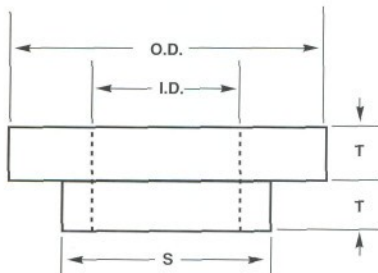

### Conduit Ring Dimensions

Ring dimensions are found in the chart below. The ring material is corrosion resistant. These rings will fit schedule 40, standard rigid conduit sizes only.

Conduit Size Inches	Ring Number	O.D.	I.D.	S	T
3/4	C-3/4	.94 (2.39)	.62 (1.57)	•	.19 (.48)
1	C-1	1.17 (2.97)	.80 (2.03)	•	.19 (.48)
1 1/4	C-1 1/4	1.50 (3.81)	1.03 (2.62)	1.31 (3.33)	.16 (.41)
1 1/2	C-1 1/2	1.76 (4.47)	1.23 (3.12)	1.52 (3.86)	.16 (.41)
2	C-2	2.23 (5.66)	1.55 (3.94)	1.97 (5.00)	.16 (.41)
2 1/2	C-2 1/2	2.67 (6.78)	2.05 (5.21)	2.40 (6.10)	.16 (.41)
3	C-3	3.20 (8.13)	2.55 (6.48)	2.97 (7.54)	.22 (.56)
3 1/2	C-3 1/2	3.80 (9.65)	3.05 (7.75)	3.47 (8.81)	.22 (.56)
4	C-4	4.30 (10.92)	3.55 (9.02)	3.94 (10.01)	.22 (.56)
4 1/2	C-4 1/2	4.80 (12.19)	4.03 (10.24)	4.45 (11.30)	.22 (.56)
5	C-5	5.30 (13.46)	4.46 (11.33)	4.96 (12.60)	.22 (.56)
6	C-6	6.30 (16.00)	5.36 (13.61)	5.96 (15.14)	.25 (.63)