

# TWIST-LOCK® Devices

## 2 Pole, 3 Wire Grounding

15 Ampere, 125, 250 Volts and 277 Volts AC

### Plugs and Connector Bodies



NEMA L5-15P  
15A 125V  
UL/CSA  
0.5 HP



NEMA L6-15P  
15A 250V  
UL/CSA  
1.5 HP



NEMA L7-15P  
15A 277V AC  
UL/CSA  
2 HP

#### Plugs

**IP20**  
SUITABILITY

Description	Cord Dia.	Catalog Numbers
Insulgrip® plug, black and white nylon. Multiple drive screws. <i>Fed Spec WC596</i>	.230"-.720" (5.8-18.3)	<b>HBL4720C™</b> <b>HBL4570C</b> <b>HBL4770C</b>
Insulgrip plug, corrosion resistant, yellow and white nylon. Multiple drive screws. <i>Fed Spec WC596</i>	.230"-.720" (5.8-18.3)	<b>HBL47CM20C</b> <b>HBL45CM70C</b> <b>HBL47CM70C</b>
Elastogrip® plug, yellow elastomer, dust tight.	300"-.655" (7.6-16.6)	<b>HBL2447</b> -   -
Elastogrip plug, yellow elastomer, water/dust tight.	300"-.655" (7.6-16.6)	<b>HBL24W47*</b> -   -
Valise® plug, yellow nylon.	.220"-.660" (5.6-16.8)	<b>HBL4723VY</b> <b>HBL4573VY</b> <b>HBL4773VY</b>
Valise plug, black nylon.	.220"-.660" (5.6-16.8)	<b>HBL4723VBK</b> <b>HBL4573VBK</b> <b>HBL4773VBK</b>

Note: \*Watertight plug IP55 suitability when installed and used with watertight connector body.



NEMA L5-15R  
15A 125V  
UL/CSA



NEMA L6-15R  
15A 250V  
UL/CSA



NEMA L7-15R  
15A 277V AC  
UL/CSA

#### Connector Bodies

Description	Cord Dia.	Catalog Numbers
Insulgrip connector body, black and white nylon. Multiple drive screws.	.230"-.720" (5.8-18.3)	<b>HBL4729C™</b> <b>HBL4579C</b> <b>HBL4779C</b>
Insulgrip connector body, corrosion resistant, yellow and white nylon. Multiple drive screws.	.230"-.720" (5.8-18.3)	<b>HBL47CM29C</b> <b>HBL45CM79C</b> <b>HBL47CM79C</b>
Elastogrip connector body, yellow elastomer, dust tight.	.300"-.655" (7.6-16.6)	<b>HBL2547</b> -   -
Elastogrip connector body, yellow elastomer, water/dust tight.	.300"-.655" (7.6-16.6)	<b>HBL25W47*</b> -   -
Valise connector body, yellow nylon.	.220"-.660" (5.6-16.8)	<b>HBL4729VY</b> <b>HBL4579VY</b> <b>HBL4779VY</b>
Valise connector body, black nylon.	.220"-.660" (5.6-16.8)	<b>HBL4729VBK</b> <b>HBL4579VBK</b> <b>HBL4779VBK</b>

Notes: See pages B-66 and B-67 for accessories.

HP ratings are AC only.


Only plugs are HP rated.

For technical information on Insulgrip devices see page B-83.

\*Watertight connector body IP55 suitability when closure plug inserted or when installed and used properly with watertight plug.




**HBL4720C**



**HBL24W47**



**HBL4723VY**

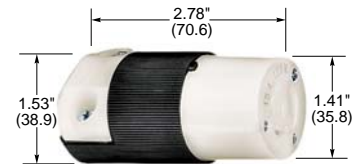

**HBL4729C**



**HBL25W47**



**HBL4729VY**