Floor and Wall Boxes Round Stamped Steel












Ť		Bood				
	Compact Stamped Steel Deep Shallow		Standard Stamped Steel Deep Shallow			
Catalog Numbers (Single Service Only)	B88D+	B88S+	B2527*	B2529*		
Min. Depth of Pour Inches (mm)	3.00" (76.2)	2.50" (63.5)	4.00" (101.6)	3.00" (76.2)		
Adjustability (Fully, Semi, Non)	Fully	Fully	Fully	Fully		
Before Pour External Height Adjustment - Inches (mm)	1.25" (31.8)	1.25" (31.8)	1.25" (31.8)	1.25" (31.8)		
After Pour Internal Height Adjustment - Inches (mm)	.44" (11.1) up .25" (6.3) down	.44" (11.1) up .25" (6.3) down	.38" (9.5)	.38" (9.5)		
Cubic Inch Capacity (cm ³)	23.50 (385.1)	19.00 (311.4)	54.00 (884.9)	37.30 (611.2)		
Dimensions - A Inches (mm)	3.31" (84.1)	3.31" (84.1)	4.19" (106.4)	4.19" (106.4)		
Dimensions - B ^(†) Inches (mm)	3.00" (76.2)	2.50" (63.5)	3.88" (98.6)	2.91" (73.9)		
Knockouts - Opposite Sides	one 1"	one 1/2"	one 1" & one ³ /4"	two ¹ /2" & one ³ /4"		
Knockouts - Opposite Ends	one 3/4"	one 3/4"	one 11/4" & one 3/4"	one 1/2" & one 1/2"		
Knockouts - Bottom	three ¹ /2" & two ³ /4"	three ¹ /2" & two ³ /4"	three ¹ /2" & two ³ /4"	three ¹ /2" & two ³ /4"		
Brass Covers (Suitable for use on the tile or carpeted floors).		S88▲ S881▲ S2955▲ S2755 S2555	S2525* S3725* S2725* S3525 S2925* S3925* S3325	SF3925 SF2925 SF2725 SF2525		

Key * Also available with aluminum adapter rings. Use "BA" prefix for floor boxes, "SA" prefix for covers.	Carpet Flanges (if required)	Diameter 6.25" (158.8)	Diameter 5.25" (133.4)	
 ▲ Accepts only short strap single receptacles. ◆ Compact Series Floor Boxes. (†) Dimension B represents the minimum dimension without base screws. Note: See page L-21 for hub sizes & locations. 	Brass Aluminum Clear Polycarbon	S3082 ate -	S3182 SA3182 S3079	S3082

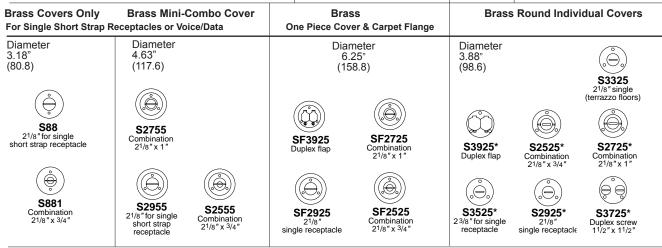

Note: See page L-22 for Hubbell Selector chart, to match receptacle to cover.

