


# SCEPTALIGHT INCANDESCENT

Sceptalight incandescent fixtures make the most practical choice to meet the daily needs of commercial, industrial, marine and agricultural applications. Our incandescents will take up to a 150 watt incandescent bulb and are ideal for short burn times as well as flashing and dimming applications.


For light to medium duty applications that do not require the same level of ruggedness, Sceptalight has a low-cost ceiling-mounted Utility Light Fixture available in standard, clear polycarbonate and coloured heat-resistant globes.



## PHOTOMETRIC DATA



**100W 120V  
Coated A19  
Incandescent**



**150W 120V  
Coated A21  
Incandescent**



### **INSTALLATION FLEXIBILITY**

Fixtures can be mounted in ceiling, wall or pendant methods to accommodate installation requirements.

### **INDOOR/OUTDOOR USE**

Temperature and weather-resistant gaskets protect fixture from moisture penetration.

### **COST EFFECTIVE SOLUTION**

Inexpensive to install, the fixture takes up to a 150 watt incandescent bulb.

### **ADAPTABLE LIGHTING ENVIRONMENTS**

Ideal for short burn times, flashing & dimming applications.

### **COLOURED GLOBES AVAILABLE**

Available in a range of coloured heat-resistant globes to transform the light into an indicator or warning light.

### **CORROSION RESISTANT**


Thermoplastic construction withstands exposure to direct sunlight, heat & extreme weather.

## MOUNTING OPTIONS

**Sceptalight LED can be retrofit with Ceiling Mounts only.**


### CEILING MOUNT

Box with four 3/4" threaded hubs and integral mounting feet.

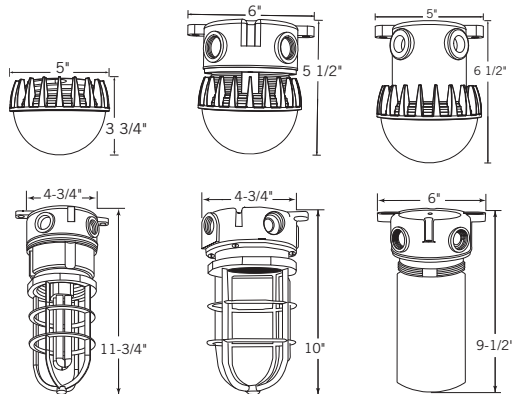


### PENDANT MOUNT

Pendant cap with 3/4" threaded hub and a locking set screw.

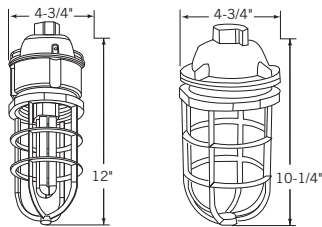


### WALL MOUNT

Box with four 3/4" threaded hubs, 90° wall bracket and integral mounting feet.



### CEILING MOUNT UTILITY FIXTURES

Box with four 3/4" threaded hubs and integral mounting feet.

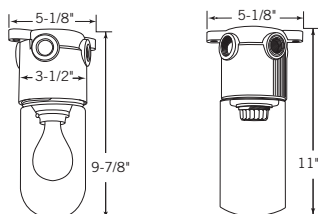

## GLOBE OPTIONS

(For incandescent and fluorescent options only)

### Standard Clear Glass Globes

Ideal for general purpose area lighting for either indoor or outdoor use.

### Clear Polycarbonate Globes

Impact resistant globes for added protection in case of accidental contact.

### Coloured Heat-Resistant Glass Globes

Available in red, blue, green or amber – to transform the light to an indicator or warning light.



Clear  
Polycarbonate



Standard/Heat-treated  
Clear Glass



Heat-treated  
Red Glass



Heat-treated  
Blue Glass



Heat-treated  
Green Glass



Heat-treated  
Amber Glass

## WET LOCATION USE



Description	Part Number	Product Code	Standard Packaging
-------------	-------------	--------------	--------------------

### Sceptalight LED

15 W LED Retrofit Light Engine	LLED-15	277018	20
15 W LED LVPF Heavy Duty Light Fixture	LVPF-LED	277074	6
15 W LED LVPE Utility Light Fixture	LVPE-LED	277075	6

### Ceiling mount with standard clear glass globe

150 W Incandescent	LVPF150C	077225	6
150 W Incandescent (Less Guard)	LVPF150LG	077237	6
7 W Compact Fluorescent	LVPL7C	077120	6
9 W Compact Fluorescent	LVPL9C	077121	6
13 W Compact Fluorescent	LVPL13C	077122	6
18 W Compact Fluorescent	LVPL18C	077210	6
26 W Compact Fluorescent	LVPL26C	077170	6

### Ceiling mount with clear polycarbonate globe (no guard)

7 W Compact Fluorescent	LVPL7PCC	077145	6
9 W Compact Fluorescent	LVPL9PCC	077155	6
13 W Compact Fluorescent	LVPL13PCC	077165	6
18 W Compact Fluorescent	LVPL18PCC	077211	6
26 W Compact Fluorescent	LVPL26PCC	077176	6

### Pendant mount with standard clear glass globe

150 W Incandescent	LPMF150C	077231	6
13 W Compact Fluorescent	LPPL13C	077185	6
18 W Compact Fluorescent	LPPL18C	077212	6
26 W Compact Fluorescent	LPPL26C	077184	6

### Pendant mount with clear polycarbonate globe (no guard)

7 W Compact Fluorescent	LPPL7PCC	077345	6
9 W Compact Fluorescent	LPPL9PCC	077355	6
13 W Compact Fluorescent	LPPL13PCC	077365	6
18 W Compact Fluorescent	LPPL18PCC	077273	6
26 W Compact Fluorescent	LPPL26PCC	077375	6

### Wall Mount

90° Wall Mount Bracket	LWB150	077233	1
------------------------	--------	--------	---

**Note:** For wall mount fixtures select the desired ceiling mount fixture from above and add LWB150 90° wall mount bracket.