

Residential Grade

Specialty Controls

Leviton supports every need with a wide range of specialty controls, including four step, lamp cord and table top dimmers. They are robust and easy to install, with features any homeowner will appreciate.

Specifications and Features

4-Level Step Dimmer

- Eliminates guesswork: user selects one of four preset lighting levels (25%, 50%, 75%, 100%)
- Easily installs in place of single pole switch
- LED indicates selected level of brightness
- Streamlined, popular Decora® styling complements interiors and is compatible with other Decora devices
- Compatible with Decora Plus™ screwless wallplates and Decora wallplates
- Limited Five-Year Warranty

Lamp Cord and Dimmer Sockets

- Compact dimmer socket is interchangeable with standard lamp holder for dimmer conversion (eliminates need for expensive 3-way bulbs)
- Full-Range Feed-Through Lamp Cord Dimmer provides full-range dimming with positive ON/OFF action
- Limited Five-Year Warranty

SPECIALTY DEVICES




TB103

Description	Cat. No.	Rating	Color
Decora 4-Level Step Dimmer Incandescent only	6161	500W-120VAC	W, I, A
HI-LO Feed-Through Lamp Cord Dimmer	1420	200W-120VAC	W*
Tabletop Dimmer for plug-in lamps	TB103	300W-120VAC	W, E
Full-Range Feed-Through Lamp Cord Dimmer (Not UL listed or CDA certified)	6250-3	200W-120VAC	I*
Full-Range Compact Dimmer Socket (1/8 I.P.S. thread and set screw)	6151	150W-120VAC	

* Basic Cat. No. denotes Brown

Maximum Load for Multi-Gang Applications

In multi-gang applications derating is required in accordance with the following charts. Many controls have side sections and fin removal is required (consult instruction sheets for further details).

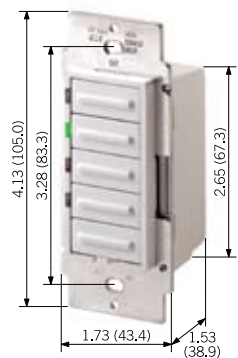

6161

Cat. No.	Single	2-Gang	3-Gang or More
6161	500W	400W	300W

TESTING AND CODE COMPLIANCE

- UL Listed (File #E-3810: 6151; File #E-7458: 1420; File #E-7442: 6250-3)
- CSA Certified (File #LR-1863: 6151; File #LR-3413: 1420)

MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating
Operating Temperature: 32°F to 130°F

COLOR

To order colors, add suffix to basic Cat. No.
White (-W), Ivory (-I), Almond (-A) and Black (-E)