


AV SOLUTIONS | Multimedia Outlet System (MOS)

MULTIMEDIA OUTLET SYSTEM (MOS)

The innovative Multimedia Outlet System (MOS) consists of a surface-mount box and single- and dual-gang wallplates that accept a variety of copper, fiber, and AV connectors. The system is ideal for multimedia applications in conference rooms, training rooms, classrooms, auditoriums, and other areas.



- Front-load installation ensures simple moves, adds, and changes
- Modules are available in 0.5, 1, 1.5, 2, and 3-unit high sizes
- Accommodates a combination of QuickPort® connectors and larger AV components such as 3-port composite/component RCA and HD-15 connectors
- Large Surface-Mount Box accepts 3 modules (1-unit high only)
- Wallplates accept 3-units high total
- New Surface-Mount Housing (pictured below) accepts one 1-unit high module and is plenum rated for use in air handling environments

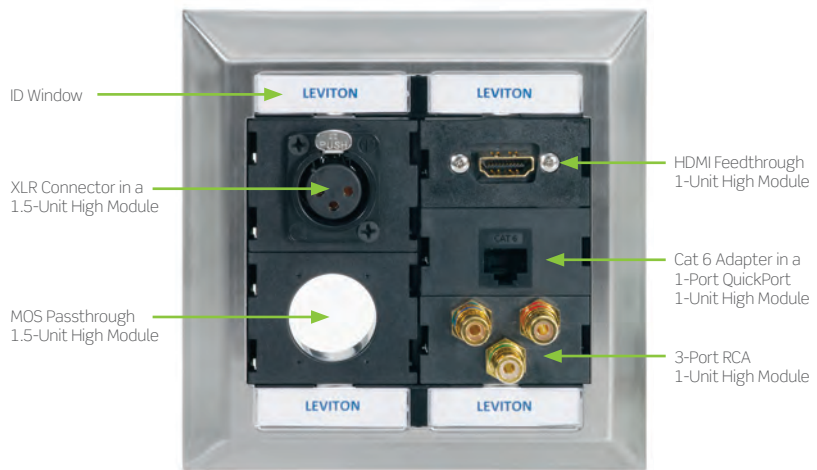

Plenum Rated
MOS Housing


TRAINING VIDEOS



Watch the training videos at Leviton.com/ns/videos: "Enhanced MOS RCA Module Installation" and "Enhanced MOS VGAModule Installation."


QUICKPORT & MOS COMPATIBILITY

The highly flexible front-loading Multimedia Outlet System (MOS) and QuickPort® Solutions work together to provide hundreds of possible configurations. Select MOS, MOS and QuickPort, or QuickPort only configurations. Blank inserts are also available to create a finished look when building in extra capacity for future growth. For more information about configuring your MOS installation, visit Leviton.com/MOS.

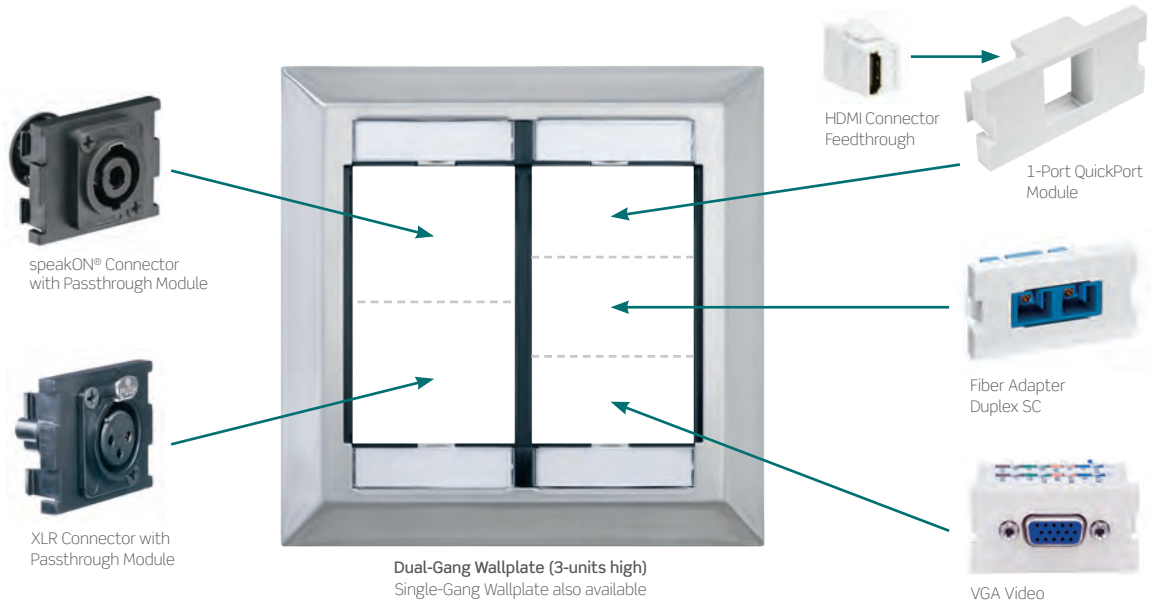

MOS MODULES WILL ALSO WORK WITH DECORA® WALLPLATES

Just snap one-unit high modules into Decora inserts.

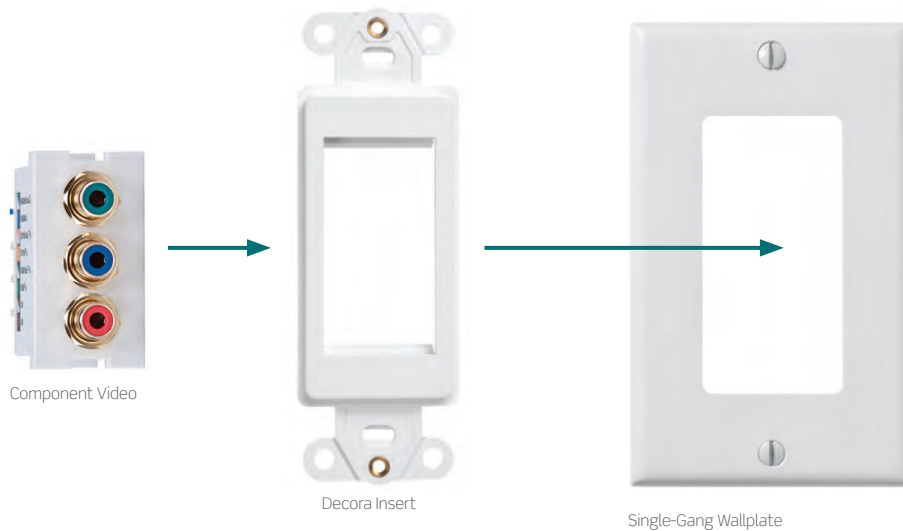

See page B66 for the complete line of fiber adapters.



A



B



C

SPEC-GRADE SOUND SPEAKERS

- AeroNylon tweeter diaphragm provides crystal-clear treble response and exceptionally accurate tracking of even the most challenging musical transients
- Built-in AutoSurge® circuit protection helps prevent speaker damage
- Advanced phase/time alignment guide properly aligns sound without misaligning the tweeters
- Precision dividing network ensures total audio signal electronic integrity up to the last microsecond before the signal is converted into sound
- Inert mounting frame with “dogleg” installation points eliminates any transmitted vibrations that could alter in-wall or in-ceiling sound quality
- Acoustically transparent, paintable grills

PRE-CONSTRUCTION KITS

- Pre-construction kits ensure that speaker locations and wiring are preserved and protected during construction, allowing for a cleaner, faster, and more precise installation during the trim-out stage
- Fire-Rated Back-Box enclosure meets fire code for MDU and similar commercial installations



SPEC-GRADE SOUND IN-WALL/IN-CEILING INDOOR SPEAKERS

DESCRIPTION	PART NO.
[A] Pair of 6.5" Spec-Grade Two-Way In-Ceiling Loudspeakers, 120 W peak/ 60 W RMS, 8 ohms	SGC65-00W
[B] Pair of 6.5" Spec-Grade Two-Way In-Wall Loudspeakers, 120 W peak/ 60 W RMS, 8 ohms	SGI65-00W
PRE-CONSTRUCTION KITS	
Rough-in Bracket for 6.5" In-Wall Loudspeakers	PCI65-KIT
[C] Fire-Rated Back-Box Enclosure (Required for 6.5" in-ceiling speakers SGC65)	AEBC6-000