

Room Control

LevNet RF™ Energy Harvesting Wireless Solutions

LevNet RF™ is Leviton's family of energy harvesting radio frequency products based on EnOcean's technology. EnOcean-based products, including the LevNet RF™ products, have three common features. They are:

- **Energy Harvesting Technology**
- **Wireless (Radio Frequency)**
- **Interoperable within an RF-Based Network**

Energy harvesting technology allows LevNet RF™ transmitters (i.e., occupancy sensors, switches, light sensors and hotel key card switches) to operate indefinitely without external power or batteries. Self-powered transmitters receive power from the motion of a switch actuation, light on a solar cell or temperature differentials in the environment for a true zero-maintenance energy harvesting device. Operating in the 315 MHz band provides minimal competing traffic and greater transmission range than other technologies. With no additional or new wiring required, LevNet RF™ delivers easy-to-install energy harvesting lighting controls with little to no interruption to a customer's operations and without damage to the customer's property.

Product Overview

There are three main types of LevNet RF™ products:

- A TRANSMITTER, such as a switch, generates a wireless RF control signal (e.g., "ACTUATE RELAY"). All transmitters are self-powered products that can be located anywhere and send transmission signals. Transmitters are available in occupancy sensor, light sensor, switch leg, Vizia®-style remote switch, Decora® rocker switch remote, handheld remote, hotel key card and 3 x 3 remote switch (international) varieties.
- A RECEIVER receives a control signal from a transmitter and performs the appropriate action (e.g., activate or deactivate the relay). All receivers are connected to a power source and a load that the receiver operates when the RF signal is received. Receivers are available in basic and advanced wall switch, 3- and 5-wire relay, plug-in and thermostat styles.
- A TRANSCEIVER acts as both a transmitter (when it is generating an RF signal) and as a receiver (when it receives and processes an RF signal generated by a transmitter). The transceiver can also be used as a repeater where it utilizes the receiver and then retransmits the RF signal. Leviton offers room, shade, dimmer and 4- and 8-channel relay controllers.
- Accessories available for LevNet RF™ products include RS-232 serial box, signal strength meter, power packs and industrial wireless relay.

Features and Benefits

- Easy to install for new construction and retrofit applications, requiring minimal labor disruption to operations
- Requires no new wiring and installs in ¼ the time of hardwired sensors, translating into faster turnaround and reduced costs
- With no batteries to replace and no maintenance to perform, plus annual energy savings and rebates that can total up to 80% in reduced costs, LevNet RF™ revolutionizes efficiency and savings
- Lowest power consumption of any RF device with less than one Watt per device used annually, saving approximately 70% over other RF devices
- LevNet RF™ is the only energy harvesting wireless solution that fulfills LEED requirements to earn LEED points for both wireless control and no battery
- Operation at 315 MHz band reduces interference and increases transmission range
- Range: 50 to 150 feet
- FCC Certified for Wireless Communication (U.S.), I.C. Certified (Canada)*
- Backed by a limited 5-year warranty

*Excludes WSD02-020.

NAFTA and Made in USA models available — visit www.leviton.com/NAFTA or www.leviton.com/USA

Visit www.leviton.com/levnetrf for more information

LevNet RF™ Energy Harvesting Wireless System

Basic System Selection

STEP 1 Determine What LOADS You Want to Control: Lighting, HVAC, Lamp, TV, etc.

STEP 2 Pick the Appropriate RF RECEIVER and/or TRANSCIVER

LevNet RF™ Wireless/
Wired-In Receivers



Receiving



LevNet RF™ Wireless/
Wired-In Transceivers



Receiving



Repeating

STEP 3 Pick the Appropriate Energy Harvesting Wireless RF Transmitter (Sensor or Switch)

LevNet RF™ Sensor
or Switch




Transmitting

Tip A good way to visualize your wireless system is to imagine that the “wires” connecting each device are invisible wires or “unique addresses.”

Wired vs. Wireless Cost

*Installation time per device: 45-50 minutes for hardwired vs. 10-15 minutes for wireless devices

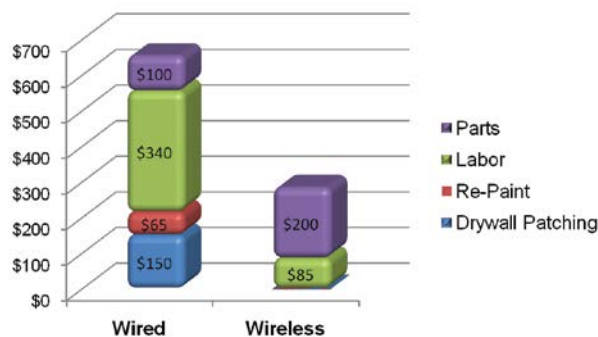

ROOM CONTROL | LevNet RF™ Receivers and Transceivers

LevNet RF™ Receivers and Transceivers

Advanced Wall Switch Receivers		
	Neutral Model	Non-Neutral Model
Cat. No.	WSS10-OUZ	WSS10-GUZ
Description	Use for larger rooms with multiple loads. Advanced pairing for rocker, momentary and toggle	
Input Voltage	120-230-277V AC	
Power Consumption	120V < 1/2 Watt; 277V < 3/4 Watt	
Memory	Stores up to 10 Transmitter IDs	
Button Pairing Modes	Rocker, Momentary and Toggle	
Vacancy Confirmation	30 seconds	
Mode	Presentation	
Time Delay	2 min (test), 10, 20, 30 min	
Load Rating	Incandescent: 800W @ 120V Fluorescent Ballasts: 1200VA @ 120V Fluorescent Ballasts: 2700VA @ 277V Motor: 1/4 HP Load @ 120V	Incandescent: 800W @ 120V Fluorescent Ballasts: 1200VA @ 120V Fluorescent Ballasts: 2700VA @ 277V Motor: 1/4 HP Load @ 120V 25W minimum load required (reduce range by 15')
Additional Listings	ETL/C-ETL: UL508, Title 24 Compliant	

Color Change Kit ships with White, Ivory and Light Almond faceplates



WSS10

Coordinating Faceplates for LevNet Wall Switch Receivers

Cat. No.	Color	Quantity
WSSCC-00G	Gray	25 per package
WSSCC-00E	Black	25 per package

SPOTLIGHT

LevNet RF™

For more information on our energy harvesting wireless solutions, including technical reference, LEED credits, programming videos, and software downloads go to www.leviton.com/levnetrf

