

Splice Trays

Features and Benefits

Injection-Molded Splice Trays

- 12-fiber mini and 24-fiber high-density splice trays
- Protect and manage heat-shrink style spliced fibers
- Heat-shrink splice sleeves included
- Ratchet action clamps with foam rubber padding minimize damage to fibers
- Compatible with Leviton Opt-X® 2000i SDX, Opt-X® 1000i SDX, and Opt-X® 1000 SDX series enclosures

Metal Splice Trays


- Available in 4- and 5-inch sizes with 12- or 24-fiber capacity
- Heat-shrink, heat-shrink foam, and bare-fusion styles available
- Mounting holes with space blocks prevent fiber damage



Splice Tray Mounting Hardware Kit

Accessories

Description	Cat. No.
Splice Tray Mounting Hardware Kit	SPLMT-HKT

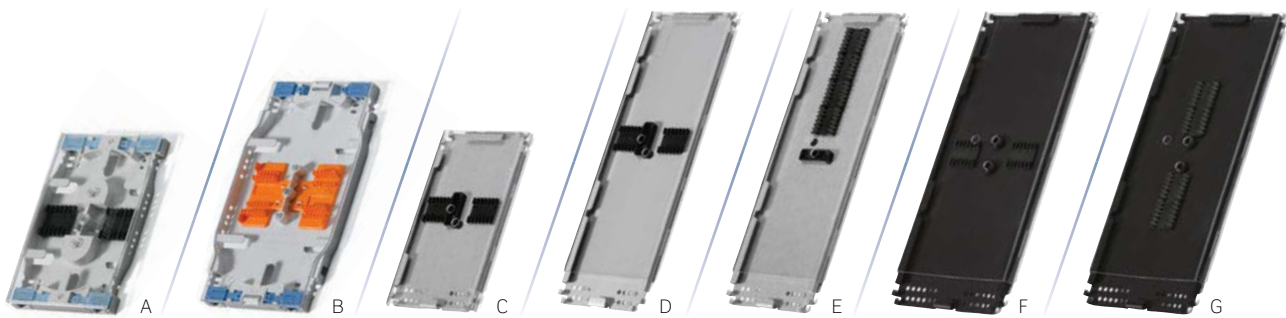

Injection-Molded Splice Trays

Description	Cat. No.
[A] 12-fiber Mini, 3.74" W x 5.59" L x 0.56" H (includes 14 heat shrink splice sleeves)	T5PLS-12F
[B] 24-fiber High-Density, 4.5" W x 7.63" L x 0.50" H (includes 26 heat shrink splice sleeves)	T5PLS-24F

Metal Splice Trays

Description	Heat Shrink (Plastic)	Heat Shrink (Foam)	Bare Fusion
[C] 12-fiber Mini, 4" W x 7" L x 0.35" H	T47HS-P06	—	T47BF-P06*
12-fiber Mini, with standoff 4" W x 7" L x 0.57" H	5T000-00T	—	—
[D] 12-fiber Standard, 4" W x 11.75" L x 0.35" H	T4LHS-P06	T4LHS-F06*	T4LBF-P06
[E] 24-fiber High-Density, 4" W x 11.75" L x 0.35" H	T4LHS-P12	T4LHS-F12*	T4LBF-P12
[F] 12-fiber Standard, 5" W x 11.75" L x 0.35" H	T5LHS-P06	T5LHS-F06*	T5LBF-P06
[G] 24-fiber High-Density, 5" W x 11.75" L x 0.35" H	T5LHS-B12	T5LHS-F12	T5LBF-P12*

Ribbon Style Splice Trays

Description	Cat. No.
72-fiber Ribbon Style, quartz, 6" W x 10" L x 0.35" H	T6XRB-40Q

*Minimum order quantity and lead times may apply.
 Note: Splice tray mounting hardware sold separately except as noted.
 Additional configurations available including mechanical splice.
 Contact Inside Sales at 800.722.2082 for more information

Splice Holders & Sleeves


Features and Benefits

Splice Holders

- 6- and 12-fiber designs in foam and solid plastic options
- Mini, micro, and mechanical options available
- Styles accommodate the entire range of Leviton fusion splice sleeves

Fusion Splice Sleeves

- Standard 40 mm and 60 mm sizes, plus mini and micro sleeves for smaller trays and fibers
- Precise lengths free of all burrs and sharp edges
- Clear outer tube for viewing fiber color

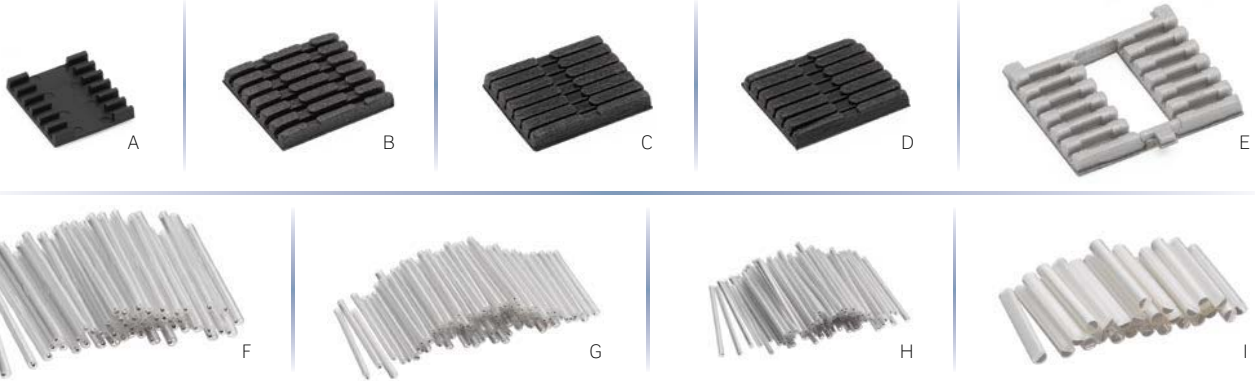

Splice Holders

Description	Cat. No.
[A] Splice Holder, heat shrink (black plastic), 6-fiber capacity	FSHHS-P06
Splice Holder, heat shrink (black plastic), 8-fiber capacity	FSHHS-P08
[B] Splice Holder, heat shrink (black foam), 6-fiber capacity	FSHSL-F06
[C] Splice Holder, mini sleeves (black foam), 6-fiber capacity	FSHMI-F06
[D] Splice Holder, micro sleeves (black foam), 6-fiber capacity	FSHMR-F06
Splice Holder, bare fusion, 12-fiber capacity	FSHBF-P12
[E] Splice Holder, heat shrink (LGX® footprint), 6-fiber capacity	FSHAT-F06
Splice Holder, ribbon, 6 position, 72-fiber capacity	FSHRB-F06

Fusion Splice Sleeves

Description	Standard 50/Pack	Slim 100/Pack	Mini 100/Pack	Micro 100/Pack	Ribbon 25/Pack
Fusion Splice Sleeve, 60 mm	[F] FSSSD-060	FSSSL-060	—	—	—
Fusion Splice Sleeve, 40 mm	FSSSD-040	FSSSL-040	[G] FSSMI-040	[H] FSSMR-040	—
Fusion Splice Sleeve, 25 mm	—	—	FSSMI-025	FSSMR-025	—
Fusion Splice Sleeve, quartz, 40 mm	—	—	—	—	[I] FSSRB-Q40

Sleeve Recommendations for Splice Trays

Splice Tray	Recommended Splice Sleeve	Splice Tray	Recommended Splice Sleeve
T5PLS-12F	INCL	T4LHS-F12	FSSSD-040
T5PLS-24F	INCL	T4LBF-P12	FSSSD-040
T47HS-P06	FSSSD-040	T5LHS-P06	FSSSD-060
T47BF-P06	FSSSD-040	T5LHS-F06	FSSSD-060
5T000-00T	FSSSD-040	T5LBF-P06	FSSSD-060
T4LHS-P06	FSSSD-060	T5LHS-B12	FSSSD-040
T4LHS-F06	FSSSD-060	T5LHS-F12	FSSSD-040
T4LBF-P06	FSSSD-060	T5LBF-P12	FSSSD-040
T4LHS-P12	FSSSD-040	T6XRB-40Q	FSSRB-Q40

R

Network Infrastructure Solutions