

Bonding Conduit Locknuts & Sealing Locknuts

Threaded For Rigid Conduit & IMC

Type 101

Bonding Wedge Locknut

Use:

Use with bushings to bond ½" through 6" rigid conduit and IMC to boxes, cabinets or other enclosures.

Material/Finish:

Steel/Zinc Electroplated

Third Party Certification:




UL Listed: E-24264



CSA Certified: 9795

Trade Size (inches)	Catalog Number	Max. Dia.	Thickness	Radius
½	101	1 ³ / ₁₆	³ / ₁₆	1 ⁵ / ₁₆
³ / ₄	102	1 ³ / ₈	³ / ₁₆	1 ⁹ / ₁₆
1	103	1 ¹ / ₁₆	³ / ₁₆	1 ¹ / ₁₆
1 ¹ / ₄	104	2 ¹ / ₁₆	³ / ₁₆	1 ¹ / ₄
1 ¹ / ₂	105	2 ³ / ₈	³ / ₁₆	1 ⁷ / ₁₆
2	106	2 ⁷ / ₈	³ / ₁₆	1 ³ / ₈
2 ¹ / ₂	107	3 ³ / ₈	³ / ₈	1 ¹⁵ / ₁₆
3	108	4 ¹ / ₄	³ / ₈	2 ¹ / ₂
3 ¹ / ₂	109	4 ¹³ / ₁₆	³ / ₈	2 ¹ / ₂
4	110	5 ⁵ / ₁₆	³ / ₈	2 ⁷ / ₈
5	112*	7	¹ / ₂	3 ³ / ₂
6	113*	8 ¹ / ₈	¹ / ₂	4 ¹ / ₁₆

*Not CSA Certified

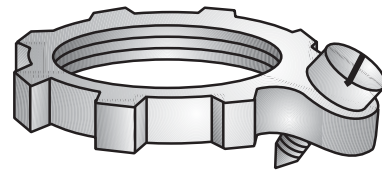

Type 101

Applicable Third Party Standards:

UL Standard: 467

CSA Standard: C22.2 No. 41

Fed. Spec: W-F-408E

NEMA: FB-1

Type SLG

Sealing Locknut

Features:

- Supplied with integrally fused PVC gasket
- Provides raintight or oil tight seal

Material/Finish:

Steel/Zinc-Plated

Third Party Certification:




UL Listed: E-11853



CSA Certified: AP57250

Trade Size (inches)	Catalog Number	Threads Per Inch	Max. Diameter	Thickness
½	SLG-50S	14	1 ¹ / ₈	¹ / ₈
³ / ₄	SLG-75S	14	1 ³ / ₈	¹ / ₈
1	SLG-100S	11 ¹ / ₂	1 ³ / ₄	³ / ₁₆
1 ¹ / ₄	SLG-125S	11 ¹ / ₂	2 ¹ / ₁₆	³ / ₁₆
1 ¹ / ₂	SLG-150S	11 ¹ / ₂	2 ³ / ₈	³ / ₁₆
2	SLG-200S	11 ¹ / ₂	2 ⁷ / ₈	³ / ₁₆
2 ¹ / ₂	SLG-250S•	8	3 ⁷ / ₁₆	1 ³ / ₈
3	SLG-300S•	8	4 ¹ / ₈	³ / ₈
3 ¹ / ₂	SLG-350S•	8	4 ⁵ / ₈	³ / ₈
4	SLG-400S•	8	5 ¹ / ₄	³ / ₈

•Not certified UL or CSA



Type SLG

Applicable Third Party Standards:

UL Standard: 514B

CSA Standard: C22.2 No. 18

Fed. Spec: W-F-408E

NEMA: FB-1